

## 1. Survey Summary

<b>Address of Transmitter Site Surveyed:</b>	Carrigaline TV Deflector Tx, Co Cork
<b>Site Type:</b>	TV (UHF PAL) MMDS (12GHz DVB-T), FM Radio
<b>Survey Date:</b>	28/04/2009

<b>Measurement Location:</b> (at point of maximum non-ionising radiation near site )	Just outside the site compound
---	--------------------------------

<b>Measurement Location Coordinates:</b>		deg	min	sec	
	<b>Latitude:</b>	N	51	47	20.8
	<b>Longitude:</b>	W	8	26	05.5

### Purpose and Conduct of Survey:

Non-ionising electromagnetic radiation levels were measured at the point of highest emissions which was determined near the site, in order to **assess compliance with** the international **ICNIRP Limits** for general public exposure to non-ionising radiation.

Compliance with the ICNIRP Limits is a **condition** of various wireless transmission **licences** issued by the **Commission for Communications Regulation (ComReg)**.

### Overall Conclusions of the Survey

<b>Frequency Selective Measurements:</b> (Individual emissions measured at specific frequencies)	<b>Below ICNIRP Public Limits (Compliant)</b>
<b>Total Exposure Quotient:</b> (Assessment of cumulative emissions from multiple transmitters)	<b>Below ICNIRP Public Limits (Compliant)</b>

## 2. Surveyors

### Survey conducted on behalf of ComReg by:



**Vilicom**

Vilicom Engineering Ltd, 14 Joyce Way, Park West Business Park, D12

<b>Survey Engineer(s):</b>	<b>Report Writer:</b>	<b>Report Reviewer:</b>
John Ryan, BSc	John Ryan, BSc	Paul Donnelly, BE

### 3. Survey Location Details

#### Transmitter Site Photo



#### Survey Weather Conditions

**Sky:**

Overcast


**Temperature:**

9° C

**Relative Humidity:**

75%

#### Map of Transmitter Site and Measurement Location

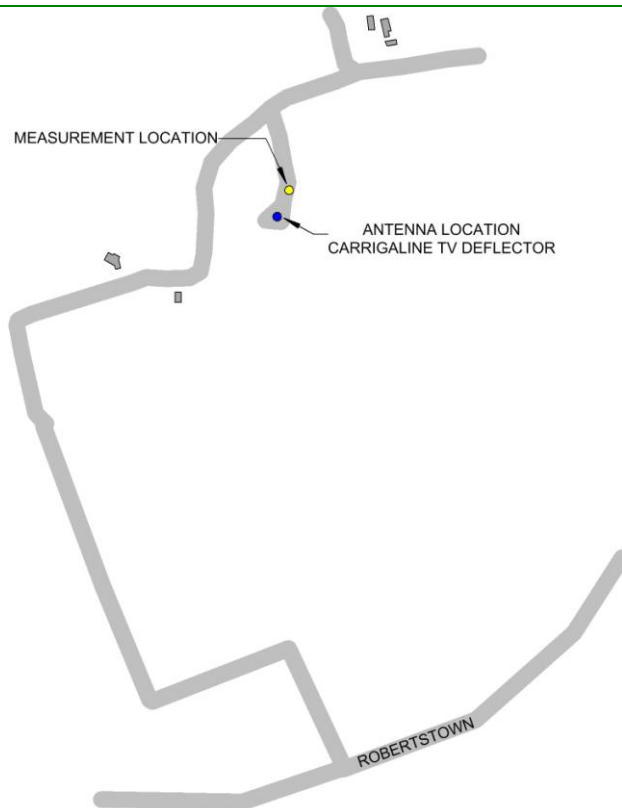

## 4. Introductory Note

### Purpose of Survey

The survey of the designated transmitter site was commissioned by the Commission for Communications Regulation (ComReg) as part of its Programme of Measurement of Non-Ionising Radiation Emissions. The purpose of the survey was to assess whether non-ionising electromagnetic radiation emissions from the site were compliant with the limits specified in the guidelines<sup>1</sup> published by the International Commission on Non-Ionizing Radiation Protection (ICNIRP). Compliance with the ICNIRP limits is a condition of various Wireless Telegraphy licences (e.g. GSM and UMTS Mobile telephony, wireless broadband, broadcasting etc.) issued by ComReg.

### Survey Methodology

Measurements of the non-ionising radiation emissions from the site were conducted in accordance with the methodology outlined in document ComReg 08/51<sup>2</sup>, which incorporates many of the measurement methods and procedures outlined in ECC Recommendation (02)04<sup>3</sup>.

### Note re this Report Version

If you have downloaded this report from [www.siteviewer.ie](http://www.siteviewer.ie) or from [www.comreg.ie](http://www.comreg.ie), you are reading an abbreviated version. In addition to sections 1 to 8, the full extended technical version of this report contains a comprehensive technical record of the measurements and any calculations performed, a list of equipment used, as well as a technical appendix. A copy of the extended report is available on request from ComReg.

---

<sup>1</sup> “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”, International Commission on Non-Ionizing Radiation Protection, Published in ‘Health Physics’, April 1998, Volume 74, Number 4. [www.icnirp.de](http://www.icnirp.de)

<sup>2</sup> <http://www.comreg.ie/fileupload/publications/ComReg0851.pdf>

<sup>3</sup> ECC REC (02)04 (revised Bratislava 2003, Helsinki 2007), “Measuring Non-Ionising Electromagnetic Radiation (9 kHz – 300 GHz), published by the European Communications Committee on [www.ero.dk](http://www.ero.dk).

## 5. Survey Overview

### Survey Stages

In accordance with the methodology outlined in document ComReg 08/51, the survey was conducted in three stages as follows:

- 1 Initial Site Survey**
- 2 Full Survey – Broadband Measurements**
- 3 Full Survey – Frequency Selective Measurements**

Brief outlines of each stage, along with results and conclusions of the measurements are presented in the three sections which follow.

### Measurement of Electromagnetic Fields

Electromagnetic fields can be sub-divided into two components:

- (1) Electric field **E** [measured in Volts per metre or V/m]
- (2) Magnetic field **H** [measured in Amperes per metre or A/m]

The E-field and the H-field are mathematically interdependent<sup>4</sup> in the **far-field** which is the region<sup>5</sup> where the distance from the radiating antenna exceeds the wavelength of the radiated electromagnetic field. The measurement locations for most transmitter installations lie well within the far-field, as the wavelengths of the transmitted signals are relatively short and the antennas are typically located many metres from any public area. The following table shows wavelengths for commonly transmitted signals:

Transmitter Type	Frequency	Wavelength
PMR Low Band VHF	68 MHz	4.41 m
UHF TV	470 MHz	0.64 m
GSM 900 (mobile phone base)	925 MHz	0.32 m
GSM 1800 (mobile phone base)	1805 MHz	0.17 m
UMTS (mobile phone base)	2110 MHz	0.14 m

In the far-field only one component needs to be measured, as the other component can be easily derived from it. Normally it is only the electric field which is measured in this region.

In the case of transmitters of very long wavelength signals, such as long wave radio (1.19 km wavelength), the H-field and E-field must be measured separately as the point of measurement will most likely lie within the **reactive near-field** region. This is the region located less than one wavelength from the radiating antenna. Here, the relationship between E and H becomes very complex and there is no direct correlation between both components of the electromagnetic field.


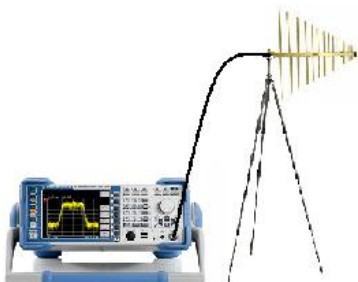

<sup>4</sup>  $E = H \times Z_0$  where  $Z_0$  (characteristic impedance of free space)  $\approx 377 \Omega$

<sup>5</sup> Beyond a distance of  $\lambda + 2D^2/\lambda$  where  $\lambda$  is the wavelength and D is the antenna's largest dimension

## Measurement Equipment

The measurement of electromagnetic fields is a complex process which involves the use of various meters, spectrum analysers, probes and antennas, which are appropriate to the frequencies of the emissions being measured.

The table below shows examples of equipment typically used to measure electromagnetic fields in non-ionising radiation surveys.

Initial Site Survey and Broadband Measurements	Frequency Selective Measurements	
 <p data-bbox="383 828 518 884">ISOTROPIC PROBE</p> <p data-bbox="399 1075 534 1153">FIELD STRENGTH METER</p> <p data-bbox="252 1232 614 1422">Used to measure the overall electric or magnetic field present over a range of frequencies. (e.g. 100kHz to 3GHz)</p>	<p data-bbox="635 683 997 772"><b>SPECTRUM ANALYSER WITH TRIPOD MOUNTED ANTENNA CONNECTED</b></p>  <p data-bbox="635 1232 1013 1489">Spectrum analysers are used to measure individual emissions at specific frequencies. The individual emissions contribute to the overall electromagnetic field. Examples of individual emissions are a TV signal and a mobile phone signal for a particular mobile operator. There may be a number of emissions from different transmitters contributing to the overall electromagnetic field at a particular location.</p>	<p data-bbox="1069 683 1412 772"><b>PORTABLE SPECTRUM ANALYSER WITH ANTENNA DIRECTLY CONNECTED</b></p> 

## 6. Initial Site Survey

An initial survey was carried out in the area around the designated transmitter site in order to determine the point of maximum non-ionising radiation (NIR). This is the location at which the overall electrical field strength level measured was somewhat higher than that measured in all other areas around the site and represents the highest level of exposure to which a member of the general public might be subjected in the vicinity of the transmitter.

For this initial survey a calibrated **field strength meter** fitted with an **18 GHz isotropic probe** was used. The meter and probe were used to measure the sum of all electrical fields present at **all frequencies from 3 MHz up to 18 GHz**.

Once the point of maximum NIR was determined, broadband and frequency selective measurements were conducted at that location (see following two sections).

For the duration of those measurements, the various instruments, antennas and probes used were mounted on non-metallic supports.


## 7. Full Survey – Broadband Measurements

The purpose of these measurements was to get an overview of the intensity of the electromagnetic field present at the point of maximum NIR near the site. There, the field strength meter and probe combination were mounted on a tripod and were set to record, over a six minute period, simultaneous measurements of the sum of all received signals within the frequency range of the probe.

The broadband measurement results presented in the graph and table below show the levels in Volts per metre (V/m) recorded in the course of the six minute measurement. The average and maximum levels can be compared to the lowest maximum ICNIRP general public guideline limit which is 28 V/m.

If a broadband measurement is higher than 28 V/m, it does not necessarily follow that the ICNIRP Limits have been exceeded, as the limits are frequency dependent. For example, if the emissions are in the 2100 MHz UMTS mobile phone frequency band, then the limit which applies is higher at 61 V/m. A more detailed investigation involving frequency selective measurement is necessary to assess compliance with the ICNIRP Limits (see next section).

**Electric field strengths recorded over 6 min period using 18 GHz probe at point of max NIR:**

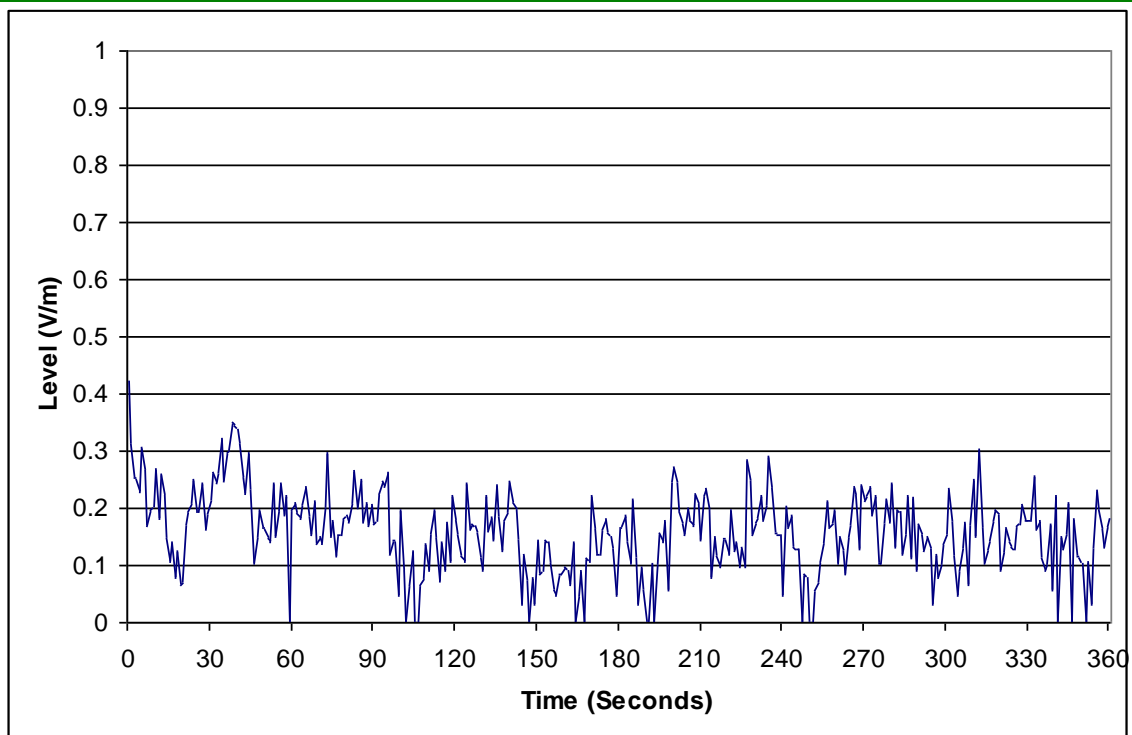

Acquisition Mode: 1 Sec. Sampling

<b>Mean Measurement:</b>	0.16 V/m	<b>Peak Measurement:</b>	0.42 V/m
<b>Date:</b>	28/04/2009	<b>Start Time:</b>	13:30
<b>Meter:</b>	Narda NBM 550	<b>Probe:</b>	EF 1891 (3 MHz - 18 GHz)

### Conclusion of the Broadband Measurements

The mean and peak measurements were below the lowest ICNIRP guideline limit of 28 V/m.

## 8. Full Survey – Frequency Selective Measurements

### Basic Measurement Procedure

A more detailed survey was performed at the point of maximum NIR near the site in order to identify the individual transmit frequencies and field strengths of each type of emission (e.g. mobile telephone GSM and UMTS, wireless broadband, TV, radio signals etc) and their contribution to the total electromagnetic field. The measurements were performed using spectrum analyser equipment and a range of antennas to match the frequency bands in which emissions were measured.

### Table of Measurement Results

A list of the measurements made is presented in the table on the next page. For each emission measured, the table shows:

- **Signal Type** (e.g. GSM or UMTS mobile phone, TV etc)
- Transmission **frequency** of the signal
- **Measured Level** (in Volts per metre, V/m)
- **Adjusted Level** if applicable (to account for the characteristics of certain signal types or to compensate for limitations of measurement equipment or to estimate emissions for max call or data traffic)
- **ICNIRP Limit** for Public Exposure

For further details of Adjusted Levels and ICNIRP Limits, please see the explanatory notes which follow the table of measurement results.

### Assessment of ICNIRP Compliance of Individual Emissions

The levels for each emission measured, which have been adjusted where necessary, are compared to the relevant ICNIRP general public guideline limit which applies at the particular frequency of the emission. It should be noted that the ICNIRP guideline limits vary according to frequency. The limits for the different measurements presented in the tables will vary as the measurements have been performed at different frequencies.

### Assessment of ICNIRP Compliance of Cumulative Emissions

The levels measured for individual emissions are used to calculate two **Total Exposure Quotients** in order to assess the cumulative effect of emissions from multiple transmitters. For further details of the quotients, please see the explanatory notes which follow the tables of measurement results.

The calculated values of the quotients must be  $\leq 1$  in order for the aggregate of NIR emissions to satisfy the criteria of the ICNIRP Guidelines.

**Table of Frequency Selective Measurement Results**

Signal Type	Frequency (MHz)	Measured Level (V/m)	Adjusted Level (V/m)	ICNIRP Limit (V/m)	Times below limit (of adjusted values)
PMR	Not disclosed	0.004683	0.004683	28.0	5979
FM Radio	107.863	0.010435	0.010435	28.0	2683
PMR	Not disclosed	0.009649	0.009649	28.0	2902
PMR	Not disclosed	0.007998	0.007998	28.0	3501
TETRA	Not disclosed	0.002630	0.004556	28.0	6146
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	4406
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	7377
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	15360
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	10456
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	16548
TV PAL	639.867	0.326964	0.414347	34.8	84
TV PAL	607.853	0.189234	0.239808	33.9	141
TV PAL	623.533	0.071614	0.090754	34.3	378
TV PAL	687.560	0.365595	0.463302	36.1	78
TV DVB-T	746.860	0.003560	0.009365	37.6	4013
TV DVB-T	664.713	0.003512	0.009236	35.5	3838
GSM 900	955.100	0.026062	0.052123	42.5	815
GSM 900	946.000	0.021232	0.042465	42.3	996
GSM 900	940.983	0.018621	0.037242	42.2	1133
GSM 1800	1845.000	0.010990	0.021980	59.1	2687
GSM 1800	1857.500	0.009977	0.019954	59.3	2970
UMTS FDD	2111.900	0.010703	0.069213	61.0	881
UMTS FDD	2132.200	0.007934	0.051308	61.0	1189
UMTS FDD	2128.700	0.006668	0.043121	61.0	1415
UMTS FDD	2146.200	0.005572	0.036032	61.0	1693
UMTS FDD	2166.267	0.004983	0.032224	61.0	1893
FWA (Lic-exempt)	5767.000	0.002101	0.005301	61.0	11507
FWA (Lic-exempt)	5745.000	0.001122	0.004697	61.0	12986

**Total Exposure Quotients [calculated from Adjusted Levels]**

Quotient	Frequency Range	Calculated Quotient Value	Limit
Electrical Stimulation Effects	1 Hz to 10 MHz	n/a	1
Thermal Effects	100 kHz and above	0.000371	1

**Conclusions of Frequency Selective Measurements**

<b>Frequency Selective Measurements:</b> (Individual emissions measured at specific frequencies)	<b>Below ICNIRP Public Limits (Compliant)</b>
<b>Total Exposure Quotient:</b> (Assessment of cumulative emissions from multiple transmitters)	<b>Below ICNIRP Public Limits (Compliant)</b>

## Explanatory Notes

### **Adjusted Levels<sup>6</sup>**


For some emissions an adjusted level has been calculated from the measured level for any or all of the following reasons:

- to compensate for the limited measurement resolution of the spectrum analyser. For example, a measurement of a digital television signal performed with at a resolution of 5 MHz needs to be adjusted upwards using a correction factor in order to account for the energy present within the full 7.6 MHz bandwidth of the signal.
- to extrapolate to an estimate of the level under maximum traffic from the transmitter. For example, the base stations of mobile telephone networks produce emissions which vary according to the changing volume of calls or data traffic over the course of the day.
- to account for the characteristics of certain complex signal types (e.g. analogue PAL TV)..

### **The ICNIRP Public Exposure Limit**

The ICNIRP Limits vary according to the frequency of the emissions, as illustrated here.

It can be seen that the limits applicable to GSM 900 mobile phone transmissions are higher than those applicable to UHF TV transmissions.

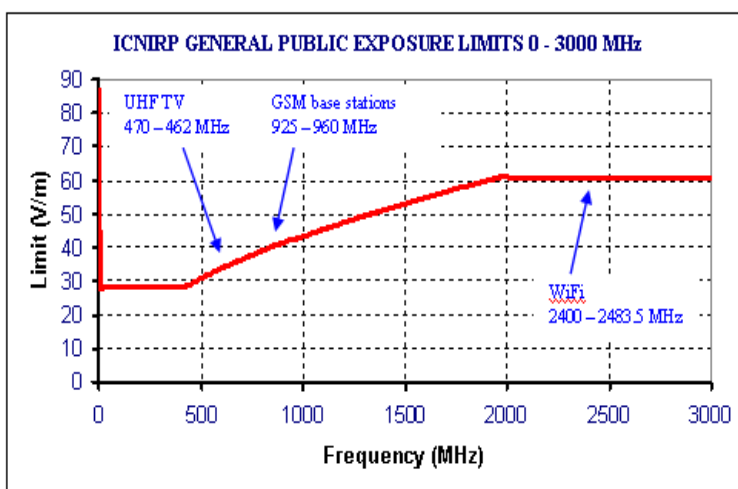

### **Total Exposure Quotients**

The Total Exposure Quotients (which must be  $\leq 1$ ) are calculated, in accordance with mathematical formulas specified in the ICNIRP Guidelines, in order to assess the cumulative effect of emissions from multiple transmitters. The quotients in this report are calculated from the Adjusted Levels rather than from the Measured Levels, in order to account for total potential public exposure under maximum traffic conditions. The two quotients are as follows:

#### **Quotient for Electrical Stimulation Effects (1 Hz to 10 MHz)**

This quotient is calculated only in a small number of cases where strong emissions in the frequency range between 1 Hz and 10 MHz are present at the survey location (e.g. near a long wave radio transmitter site).

#### **Quotient for Thermal Effects (100 kHz and above)**

The measurements of any emissions above 100 kHz are used to calculate a Quotient to assess any thermal (heat) effects.

<sup>6</sup> See appendices to the extended technical version of this report for further details re calculation of adjusted levels.