

1. Survey Summary

Address of Transmitter Site Surveyed:	Collins Barracks, Old Youghal Rd., Cork City, Co. Cork
Site Type:	GSM, UMTS
Survey Date:	27/05/2010

Measurement Location: (at point of maximum non-ionising radiation near site)	On footpath in Lansdowne court estate off the old Youghal road.
---	---

Measurement Location Coordinates:			deg	min	sec
	Latitude:	N	51	54	20.9
	Longitude:	W	8	28	8.58

Purpose and Conduct of Survey:

Non-ionising electromagnetic radiation levels were measured at the point of highest emissions which was determined near the site, in order to **assess compliance with** the international **ICNIRP Limits** for general public exposure to non-ionising radiation.

Compliance with the ICNIRP Limits is a **condition** of various wireless transmission **licences** issued by the **Commission for Communications Regulation (ComReg)**.

Overall Conclusions of the Survey

Frequency Selective Measurements: (Individual emissions measured at specific frequencies)	Below ICNIRP Public Limits (Compliant)
Total Exposure Quotient: (Assessment of cumulative emissions from multiple transmitters)	Below ICNIRP Public Limits (Compliant)

2. Surveyors

Survey conducted on behalf of ComReg by:



Vilicom

Vilicom Engineering Ltd, 14 Joyce Way, Park West Business Park, D12

Survey Engineer(s):	Report Writer:	Report Reviewer:
Dermot Spillane, BE	Dermot Spillane, BE	John Ryan, BSc

3. Survey Location Details

Transmitter Site Photo




Survey Weather Conditions

Sky:
Cloudy

Temperature:
18° C

Relative Humidity:
56%

Map of Transmitter Site and Measurement Location

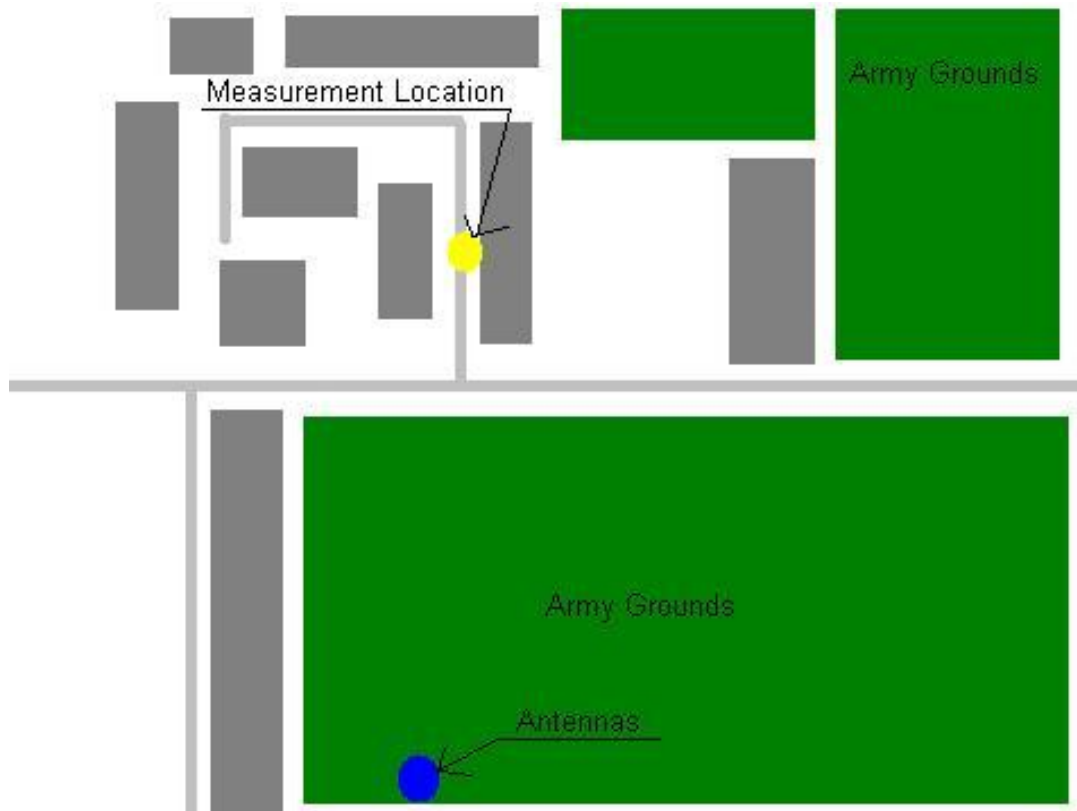

4. Introductory Note

Purpose of Survey

The survey of the designated transmitter site was commissioned by the Commission for Communications Regulation (ComReg) as part of its Programme of Measurement of Non-Ionising Radiation Emissions. The purpose of the survey was to assess whether non-ionising electromagnetic radiation emissions from the site were compliant with the limits specified in the guidelines¹ published by the International Commission on Non-Ionizing Radiation Protection (ICNIRP). Compliance with the ICNIRP limits is a condition of various Wireless Telegraphy licences (e.g. GSM and UMTS Mobile telephony, wireless broadband, broadcasting etc.) issued by ComReg.

Survey Methodology

Measurements of the non-ionising radiation emissions from the site were conducted in accordance with the methodology outlined in document ComReg 08/51R², which incorporates many of the measurement methods and procedures outlined in ECC Recommendation (02)04³.

Note re this Report Version

If you have downloaded this report from www.siteviewer.ie or from www.comreg.ie, you are reading an abbreviated version. In addition to sections 1 to 8, the full extended technical version of this report contains a comprehensive technical record of the measurements and any calculations performed, a list of equipment used, as well as a technical appendix. A copy of the extended report is available on request from ComReg.

¹ “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”, International Commission on Non-Ionizing Radiation Protection, Published in ‘Health Physics’, April 1998, Volume 74, Number 4. www.icnirp.de

² <http://www.comreg.ie/fileupload/publications/ComReg0851R.pdf>

³ ECC REC (02)04 (revised Bratislava 2003, Helsinki 2007), “Measuring Non-Ionising Electromagnetic Radiation (9 kHz – 300 GHz), published by the European Communications Committee on www.ero.dk.

5. Survey Overview

Survey Stages

In accordance with the methodology outlined in document ComReg 08/51R, the survey was conducted in three stages as follows:

- 1 Initial Site Survey
- 2 Full Survey – Broadband Measurements
- 3 Full Survey – Frequency Selective Measurements

Brief outlines of each stage, along with results and conclusions of the measurements are presented in the three sections which follow.

Measurement of Electromagnetic Fields

Electromagnetic fields can be sub-divided into two components:

- (1) Electric field **E** [measured in Volts per metre or V/m]
- (2) Magnetic field **H** [measured in Amperes per metre or A/m]

The E-field and the H-field are mathematically interdependent⁴ in the **far-field** which is the region⁵ where the distance from the radiating antenna exceeds the wavelength of the radiated electromagnetic field. The measurement locations for most transmitter installations lie well within the far-field, as the wavelengths of the transmitted signals are relatively short and the antennas are typically located many metres from any public area. The following table shows wavelengths for commonly transmitted signals:

Transmitter Type	Frequency	Wavelength
PMR Low Band VHF	68 MHz	4.41 m
UHF TV	470 MHz	0.64 m
GSM 900 (mobile phone base)	925 MHz	0.32 m
GSM 1800 (mobile phone base)	1805 MHz	0.17 m
UMTS (mobile phone base)	2110 MHz	0.14 m

In the far-field only one component needs to be measured, as the other component can be easily derived from it. Normally it is only the electric field which is measured in this region.

In the case of transmitters of very long wavelength signals, such as long wave radio (1.19 km wavelength), the H-field and E-field must be measured separately as the point of measurement will most likely lie within the **reactive near-field** region. This is the region located less than one wavelength from the radiating antenna. Here, the relationship between E and H becomes very complex and there is no direct correlation between both components of the electromagnetic field.


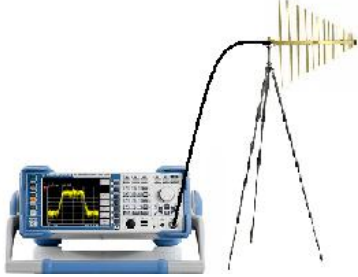

⁴ $E = H \times Z_0$ where Z_0 (characteristic impedance of free space) $\approx 377 \Omega$

⁵ Beyond a distance of $\lambda + 2D^2/\lambda$ where λ is the wavelength and D is the antenna's largest dimension

Measurement Equipment

The measurement of electromagnetic fields is a complex process which involves the use of various meters, spectrum analysers, probes and antennas, which are appropriate to the frequencies of the emissions being measured.

The table below shows examples of equipment typically used to measure electromagnetic fields in non-ionising radiation surveys.

Initial Site Survey and Broadband Measurements	Frequency Selective Measurements	
 <p>Used to measure the overall electric or magnetic field present over a range of frequencies. (e.g. 100kHz to 3GHz)</p>	<p>SPECTRUM ANALYSER WITH TRIPOD MOUNTED ANTENNA</p>  <p>Spectrum analysers are used to measure individual emissions at specific frequencies. The individual emissions contribute to the overall electromagnetic field. Examples of individual emissions are a TV signal and a mobile phone signal for a particular mobile operator. There may be a number of emissions from different transmitters contributing to the overall electromagnetic field at a particular location.</p>	<p>PORTABLE SPECTRUM ANALYSER WITH ANTENNA DIRECTLY CONNECTED</p> 

6. Initial Site Survey

An initial survey was carried out in the area around the designated transmitter site in order to determine the point of maximum non-ionising radiation (NIR). This is the location at which the overall electrical field strength level measured was somewhat higher than that measured in all other areas around the site and represents the highest level of exposure to which a member of the general public might be subjected in the vicinity of the transmitter.

For this initial survey a calibrated **field strength meter** fitted with an **18 GHz isotropic probe** was used. The meter and probe were used to measure the sum of all electrical fields present at **all frequencies from 3 MHz up to 18 GHz**.

Once the point of maximum NIR was determined, broadband and frequency selective measurements were conducted at that location (see following two sections).

For the duration of those measurements, the various instruments, antennas and probes used were mounted on non-metallic supports.


7. Full Survey – Broadband Measurements

The purpose of these measurements was to get an overview of the intensity of the electromagnetic field present at the point of maximum NIR near the site. There, the field strength meter and probe combination were mounted on a tripod and were set to record, over a six minute period, simultaneous measurements of the sum of all received signals within the frequency range of the probe.

The broadband measurement results presented in the graph and table below show the levels in Volts per metre (V/m) recorded in the course of the six minute measurement. The average and maximum levels can be compared to the lowest maximum ICNIRP general public guideline limit which is 28 V/m.

If a broadband measurement is higher than 28 V/m, it does not necessarily follow that the ICNIRP Limits have been exceeded, as the limits are frequency dependent. For example, if the emissions are in the 2100 MHz UMTS mobile phone frequency band, then the limit which applies is higher at 61 V/m. A more detailed investigation involving frequency selective measurement is necessary to assess compliance with the ICNIRP Limits (see next section).

Electric field strengths recorded over 6 min period using 18 GHz probe at point of max NIR:

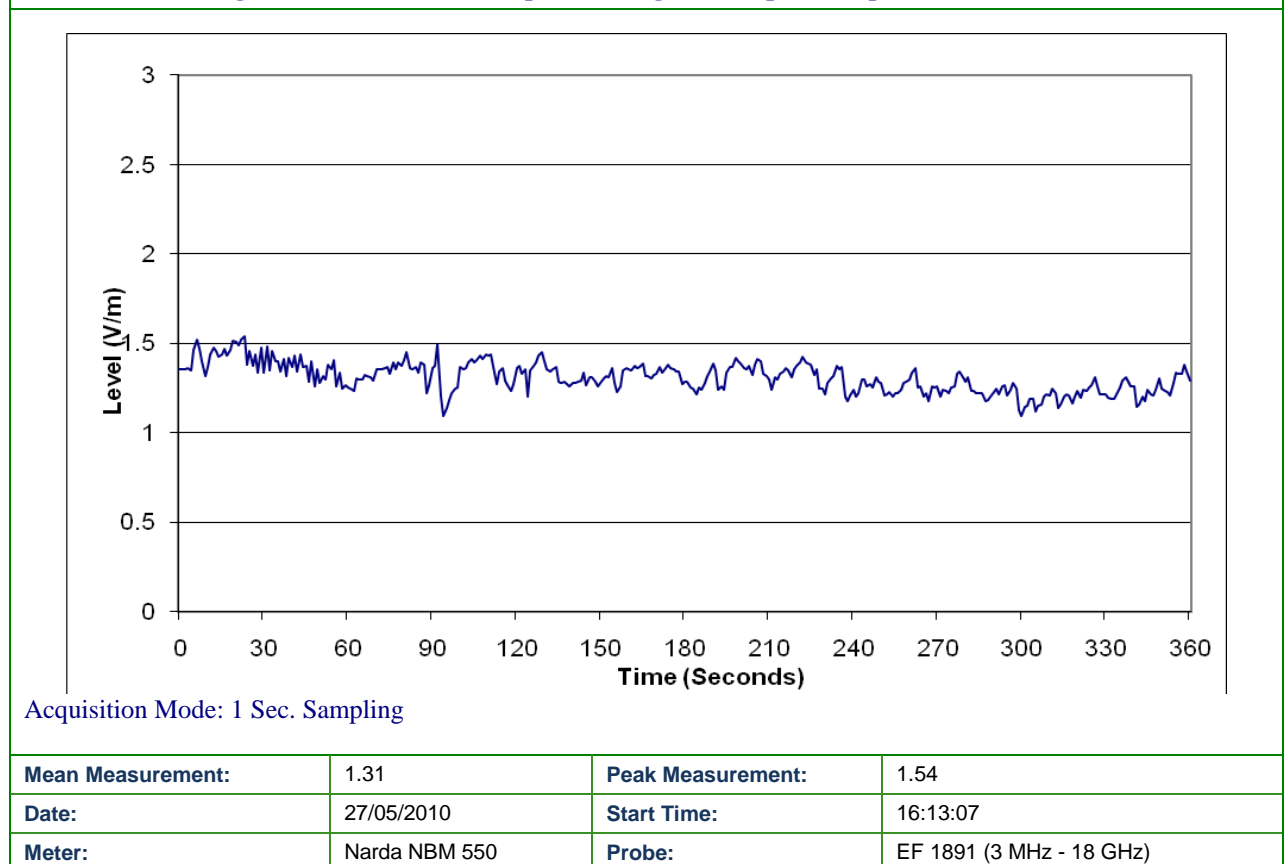

Conclusion of the Broadband Measurements

The mean and peak measurements were below the lowest ICNIRP guideline limit of 28 V/m.

8. Full Survey – Frequency Selective Measurements

Basic Measurement Procedure

A more detailed survey was performed at the point of maximum NIR near the site in order to identify the individual transmit frequencies and field strengths of each type of emission (e.g. mobile telephone GSM and UMTS, wireless broadband, TV, radio signals etc) and their contribution to the total electromagnetic field. The measurements were performed using spectrum analyser equipment and a range of antennas to match the frequency bands in which emissions were measured.

Table of Measurement Results

A list of the measurements made is presented in the table on the next page. For each emission measured, the table shows:

- **Emission Type** (e.g. GSM or UMTS mobile phone, TV etc)
- Transmission **frequency** of the signal
- **Measured Level** (in Volts per metre, V/m)
- **Adjusted Level** if applicable (to account for the characteristics of certain signal types or to compensate for limitations of measurement equipment or to estimate emissions for max call or data traffic)
- **ICNIRP Limit** for Public Exposure

For further details of Adjusted Levels and ICNIRP Limits, please see the explanatory notes which follow the table of measurement results.

Assessment of ICNIRP Compliance of Individual Emissions

The levels for each emission measured, which have been adjusted where necessary, are compared to the relevant ICNIRP general public guideline limit which applies at the particular frequency of the emission. It should be noted that the ICNIRP guideline limits vary according to frequency. The limits for the different measurements presented in the tables will vary as the measurements have been performed at different frequencies.

Assessment of ICNIRP Compliance of Cumulative Emissions

The levels measured for individual emissions are used to calculate two **Total Exposure Quotients** in order to assess the cumulative effect of emissions from multiple transmitters. For further details of the quotients, please see the explanatory notes which follow the tables of measurement results.

The calculated values of the quotients must be ≤ 1 in order for the aggregate of NIR emissions to satisfy the criteria of the ICNIRP Guidelines.

Table of Frequency Selective Measurement Results

Emission Type	Frequency	Measured Level (V/m)	Adjusted Level (V/m)	ICNIRP Limit (V/m)	Times below Limit [adjusted Values]
PMR	Not disclosed	0.004088	0.004088	28	6849
FM Radio	106.155	0.299226	0.299226	28	94
FM Radio	94.812	0.120365	0.120365	28	233
FM Radio	96.383	0.058546	0.058546	28	478
FM Radio	102.670	0.052180	0.052180	28	537
FM Radio	89.208	0.035278	0.035278	28	794
FM Radio	101.030	0.035035	0.035035	28	799
PMR	Not disclosed	0.017022	0.017022	28	1645
PMR	Not disclosed	0.013932	0.013932	28	2010
PMR	Not disclosed	0.003097	0.003097	28	9040
PMR	Not disclosed	0.003232	0.003232	28	8663
PMR	Not disclosed	0.002567	0.002567	28	10906
T-DAB	Not disclosed	0.023469	0.027733	28	1010
TETRA	Not disclosed	0.029614	0.051293	28	546
TETRA	Not disclosed	0.028510	0.049381	28	567
TETRA	Not disclosed	0.018239	0.031591	28	886
TETRA	Not disclosed	0.004748	0.008224	28	3405
TETRA	Not disclosed	0.004519	0.007826	28	3578
TETRA	Not disclosed	0.003195	0.005534	28	5059
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	3162
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	8392
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	18898
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	28884
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	35725
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	36173
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	17984
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	37724
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	55893
TV PAL	615.933	0.699842	0.886879	34.1	38
TV PAL	647.467	0.625893	0.793166	35.0	44
TV PAL	671.667	0.613762	0.777793	35.6	46
TV PAL	602.000	0.014774	0.018723	33.7	1802
TV PAL	522.800	0.012764	0.016176	31.4	1944
TV PAL	558.733	0.009110	0.011544	32.5	2815
TV PAL	719.240	0.805378	1.020620	36.9	36
TV PAL	783.453	0.059498	0.075399	38.5	510
TV PAL	807.533	0.048362	0.061286	39.1	638
TV PAL	759.373	0.037196	0.047137	37.9	804
TV PAL	733.573	0.010483	0.013285	37.2	2803
TV PAL	824.733	0.007473	0.009470	39.5	4170

Results continued on the next page....

Emission Type	Frequency	Measured Level (V/m)	Adjusted Level (V/m)	ICNIRP Limit (V/m)	Times below Limit [adjusted Values]
TV DVB-T	668.733	0.063168	0.166148	35.6	214
GSM	955.567	0.812831	1.625661	42.5	26
GSM	953.233	0.090261	0.180522	42.5	235
GSM	945.417	0.043401	0.086802	42.3	487
GSM	938.067	0.024717	0.049434	42.1	852
GSM	947.283	0.017080	0.034161	42.3	1239
GSM	939.583	0.018093	0.036185	42.1	1165
GSM	1857.000	0.488090	0.976180	59.3	61
GSM	1856.000	0.250035	0.500069	59.2	118
GSM	1838.250	0.014109	0.028218	59.0	2089
GSM	1861.000	0.010740	0.021480	59.3	2762
GSM	1831.250	0.011028	0.022056	58.8	2668
GSM	1865.250	0.014142	0.028283	59.4	2100
UMTS FDD	2131.733	0.222075	1.436103	61	42
UMTS FDD	2128.000	0.213059	1.377798	61	44
UMTS FDD	2166.733	0.106782	0.690535	61	88
UMTS FDD	2147.600	0.098514	0.637068	61	96
UMTS FDD	2117.500	0.005266	0.034055	61	1791
UMTS FDD	2112.833	0.004781	0.030916	61	1973
WiFi	2440.358	0.004932	0.019135	61	3188
FWALA	3588.000	0.001320	0.003329	61	18322
FWALA	3560.000	0.001131	0.002853	61	21378
FWALA	3545.000	0.001046	0.002638	61	23119
FWALA	3505.000	0.000627	0.001583	61	38546
FWALA	3791.900	0.008433	0.025427	61	2399
FWALA	10241.113	0.002848	0.010159	61	6004

Total Exposure Quotients [calculated from Adjusted Levels]

Quotient	Frequency Range	Calculated Quotient Value	Limit
Electrical Stimulation Effects	1 Hz to 10 MHz	n/a	1
Thermal Effects	100 kHz and above	0.00575	1

Conclusions of Frequency Selective Measurements

Frequency Selective Measurements: (Individual emissions measured at specific frequencies)	Below ICNIRP Public Limits (Compliant)
Total Exposure Quotient: (Assessment of cumulative emissions from multiple transmitters)	Below ICNIRP Public Limits (Compliant)

Explanatory Notes

Adjusted Levels⁶


For some emissions an adjusted level has been calculated from the measured level for any or all of the following reasons:

- to compensate for the limited measurement resolution of the spectrum analyser. For example, a measurement of a digital television signal performed with at a resolution of 5 MHz needs to be adjusted upwards using a correction factor in order to account for the energy present within the full 7.6 MHz bandwidth of the signal.
- to extrapolate to an estimate of the level under maximum traffic from the transmitter. For example, the base stations of mobile telephone networks produce emissions which vary according to the changing volume of calls or data traffic over the course of the day.
- to account for the characteristics of certain complex signal types (e.g. analogue PAL TV).

The ICNIRP Public Exposure Limit

The ICNIRP Limits vary according to the frequency of the emissions, as illustrated here.

It can be seen that the limits applicable to GSM 900 mobile phone transmissions are higher than those applicable to UHF TV transmissions.

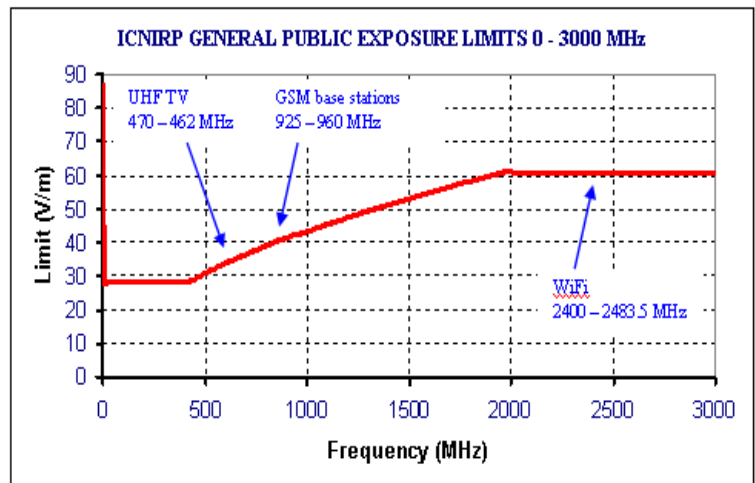

Total Exposure Quotients

The Total Exposure Quotients (which must be ≤ 1) are calculated, in accordance with mathematical formulas specified in the ICNIRP Guidelines, in order to assess the cumulative effect of emissions from multiple transmitters. The quotients in this report are calculated from the Adjusted Levels rather than from the Measured Levels, in order to account for total potential public exposure under maximum traffic conditions. The two quotients are as follows:

Quotient for Electrical Stimulation Effects (1 Hz to 10 MHz)

This quotient is calculated only in a small number of cases where strong emissions in the frequency range between 1 Hz and 10 MHz are present at the survey location (e.g. near a long wave radio transmitter site).

Quotient for Thermal Effects (100 kHz and above)

The measurements of any emissions above 100 kHz are used to calculate a Quotient to assess any thermal (heat) effects.

⁶ See appendices to the extended technical version of this report for further details re calculation of adjusted levels.