



Commission for
Communications Regulation

Report

Programme of Measurement of Non-Ionising Radiation emissions

0497 - Corbally Wood

Site Measurement Date:

13th May 2004

Contents

1	Introduction	3
2	Background	4
2.1	ROLE OF THE COMMISSION FOR COMMUNICATIONS REGULATION	4
2.2	ROLE OF MASON COMMUNICATIONS LTD.	4
3	NIR Site Measurements Conclusion and Results	5
3.1	CONCLUSION OF SITE REPORT RESULTS	7
3.2	SITE REPORT – CORBALLY WOOD	8
3.2.1	<i>Detailed Results</i>	8
3.2.2	<i>SITE SKETCH MAP</i>	28
3.2.3	<i>SITE PHOTOGRAPHS</i>	29
	Annex 1	30
	Annex 2	33
	Glossary.....	35

1 Introduction

The Commission for Communications Regulation (ComReg) is the licensing authority for the use of the radio frequency spectrum in Ireland. This spectrum is a national resource which has been used for communications purposes for over 100 years. Applications of radio spectrum, today, include the transmission of a wide range of services, including radio and television broadcasting, mobile telephony and other telecommunications services such as internet connection.

As the licensing authority for radiocommunications in Ireland, ComReg is responsible for ensuring that communications operators comply with their licence condition relating to non-ionising radiation. The radiation emissions from communications sites must be within the levels set down in the latest international guidelines.

The full programme consists of the measurement of Non-Ionising Radiation emissions at 400 sites throughout the country. The programme is being carried out by Mason Communications in conjunction with Radio Frequency Investigations on behalf of ComReg.

For each site, ComReg requires that the measured levels of non-ionising radiation emissions should not exceed the ICNIRP limits in any part of the site or surrounding area where the general public have access. Non-ionising radiation is that part of the electromagnetic spectrum below 2420 million MHz. Radiowaves, infra-red radiation and visible light are examples of NIR.(See Annex 1)

This report is arranged as follows:

The first section is an introduction to the programme.

The second section outlines the role of the ComReg in the area of NIR. It also outlines Mason Communications role in the programme.

The third section is Mason Communications' report on the measurement programme for the site. The site report contains a conclusion on the extent of compliance of the site with the general public exposure limits of the ICNIRP Guidelines 1998.

The Annex section contains two sections which are as follows:

1. An explanation of Non-Ionising Radiation and an explanation of the International Committee for Non-Ionising Radiation Protection and the guideline limits associated with that body.
2. A guide to the methodology used in the site measurements.

There is also a glossary explaining each of the terms used through the report.

2 Background

2.1 Role of the Commission for Communications Regulation

In 2003/2004 measurements of Non-Ionising Radiation emissions are being taken at 400 sites throughout the country in a programme agreed with the Minister for Communications, Marine and Natural Resources, and the Minister for the Environment and Local Government. The programme is being carried out by Mason Communications in conjunction with Radio Frequency Investigations (RFI) on behalf of ComReg.

The aim of the programme is to ensure that emissions from communications sites comply with the general public exposure limits set down by the International Commission for Non-Ionising Radiation Protection (ICNIRP). Some sites have been nominated by the public and the other sites are chosen by Mason/RFI, based on population coverage. Currently, radiation emissions from communications sites must be within the levels set down in the ICNIRP guidelines.

At the outset of the programme, ComReg invited nominations from the interested parties for telecommunication masts to be included. The last date for nominations was 6th June 2003 and on this date some thirty sites had been nominated by the public and 25 by the Minister's department. The other sites were chosen on a random basis by Mason/RFI. Both methods of choosing sites were based on population distribution.

2.2 Role of Mason Communications Ltd.

Following a competitive tender process held in early 2003, Mason Communications in conjunction with Radio Frequency Investigations Ltd. were chosen to carry out the site measurements and to produce a report on each site. Mason Communications Ireland Ltd. is a wholly owned subsidiary of Mason Group Ltd. Mason advises many of the leading organisations in Ireland on converging markets and converging technologies. The management of this programme by Mason Communications involved the services of Radio Frequency Investigations (RFI) Ltd. RFI has been performing Non-Ionising Radiation site surveys since its formation in 1987. RFI is accredited to ISO 17025, which ensures independence from other bodies that may be involved directly or indirectly in this programme.

3 NIR Site Measurements Conclusion and Results

ComReg has commissioned Mason Communications, as an independent consultancy service, to conduct a survey of 400 sites. Mason Communications and their measuring sub-contractor “Radio Frequency Investigation (RFI) Ltd” will work on the programme throughout 2003 and 2004.

Mason/RFI engineers measure the power density of transmissions in the various radio bands to be surveyed¹. The results, derived from electric field voltage measurements, are referenced to and presented alongside the relevant International Commission on Non-Ionising Radiation Protection (ICNIRP) recommended public maximum exposure levels.

Section 3.2 provides a set of graphs and tables for each location where measurements were made.

At each location electric field strength measurements, conducted in the frequency bands of interest, are recorded and converted to power density levels for direct comparison with the ICNIRP guideline levels. These power density levels are tabulated alongside the relevant ICNIRP limits. The tables present the highest emission level readings recorded within a band. To the left of each of the results tables, a graphical snapshot of the radio spectrum being analysed is presented.

The power density and the quotient contained in these graphs are given in exponential (E) format. The reason for this is that the value is too long to be represented as a decimal number in the tables. An example of this is as follows:

$$3.61469\text{E-}09 = 3.61469 \times 10^{-9} = .00000000361469$$

It is therefore very important to note the values after E to identify the highest reading at any site. For each table at each position the highest reading is at the top of the relevant list.

¹ See Annex 2 for the site measurement methodology



Site Survey Report from Mason Communications Ltd / Radio Frequency Investigation Ltd

Audit Site: MKK04 – Corbally Wood

	NAME	SIGNATURE	DATE
PREPARED BY	S. Roe		30 th June 2004
REVIEWED BY	G. Mooney		30 th June 2004
SIGNED-OFF BY	P. Coakley		1 st July 2004
This report has been reviewed by Mason Communications and accurately reflects the measurements taken at Corbally Wood by Dan Smith on 13 th May 2004.			

3.1 Conclusion of site report results

The following table is a summary of the highest readings taken at this site:

Site	Frequency Range	Highest reading W/m ²	ICNIRP guideline Limit W/m ²
Corbally Wood	30MHz – 85MHz	0.000396879	2
	85MHz – 95MHz	0.036530755	2
	95MHz – 105MHz	0.012754359	2
	105MHz – 115MHz	0.000012843	2
	115MHz – 170MHz	0.000000610	2
	170MHz – 230MHz	0.000000360	2
	230MHz – 470MHz	0.000142121	2.281
	470MHz – 670MHz	0.000000141	2.56
	670MHz – 870MHz	0.000079188	4.0425
	870MHz – 1GHz	0.000058568	4.7365
	GSM 900	0.000061611	4.7361
	GSM 1800	0.000000002	9.28
	1GHz – 2GHz	0.000000005	6.015
	2GHz – 10GHz	0.000000594	10
	10GHz – 18GHz	0.000032111	10
18GHz – 40GHz	0.000978720	10	

The overall measurements taken at the site and given in part 3.2 of this report conclude that the NIR emissions from the site are below the ICNIRP guideline limits.

3.2 Site Report – Corbally Wood

3.2.1 Detailed Results

3.2.1.1 Position 1. Corbally Wood, Adjacent to Masts, approximately 30 m North of RTE Mast.

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 1	Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
NGR: S 50053 24925	
Date: 13/05/04	
Officer: Dan Smith	

30 MHz to 85 MHz

<p>45019_MKX04_01 - Corbally Wood 001</p> <p>Start 30.0 MHz; Stop 85.0 MHz Ref 100 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 71.11 MHz; 100.79 dBµV Transducer Factors: Bi-Conical 130562004 11 21 46</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	71.11	0.000031817	2	62859.56132	1.59085E-05
	84.17	0.000000217	2	9233606.142	1.083E-07
	81.97	0.000000105	2	18983284.04	5.26779E-08
	79.91	0.000000047	2	42498279.25	2.35304E-08
	83.49	0.000000012	2	161202341.5	6.20338E-09
	68.64	0.000000007	2	268764154.6	3.72073E-09
	80.87	0.000000005	2	373569443.9	2.67688E-09
	77.58	0.000000005	2	440931723.4	2.26792E-09
	67.95	0.000000004	2	458533791	2.18086E-09
	Total Quotient				1.611E-05

85 MHz to 95 MHz

<p>45019_MKX04_01 - Corbally Wood 002</p> <p>Start 85.0 MHz; Stop 95.0 MHz Ref 127 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 93.42 MHz; 122.83 dBµV Transducer Factors: Bi-Conical 130562004 11 24 30</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient	
	93.42	0.005089307	2	392.9808122	0.002544654	
	91.25	0.003059558	2	653.6892543	0.001529779	
	89	0.001869212	2	1069.969371	0.000934606	
	94.07	0.000001428	2	1400784.559	7.13886E-07	
	89.6	0.000001290	2	1550141.509	6.45102E-07	
	91.77	0.000001013	2	1974109.988	5.06557E-07	
	Total Quotient				0.005010904	

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 1	Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
NGR: S 50053 24925	
Date: 13/05/04	
Officer: Dan Smith	

95 MHz to 105 MHz

<p>45019_MKK04_01 - Corbally Wood 004</p> <p>Start 95.0 MHz; Stop 105.0 MHz Ref 127 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 95.62 MHz; 117.96 dBµV Transducer Factors: Bi-Conical 13/05/2004 11:30:46</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	98.62	0.001665937	2	1200.52538	0.000832969
	100.83	0.001201320	2	1664.835569	0.00060066
	96.05	0.000369538	2	5412.168956	0.000184769
	103.1	0.000285535	2	7004.406556	0.000142767
	99.2	0.000000656	2	3050502.223	3.27815E-07
	101.35	0.000000431	2	4638433.62	2.1559E-07
	95.17	0.000000148	2	13501168.14	7.40677E-08
	102.2	0.000000053	2	37702603.94	2.65234E-08
	97.52	0.000000041	2	48570362.62	2.05887E-08
				Total Quotient	0.001761829

105 MHz to 115 MHz

<p>45019_MKK04_01 - Corbally Wood 003</p> <p>Start 105.0 MHz; Stop 115.0 MHz Ref 100 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 106.08 MHz; 82.9 dBµV Transducer Factors: Bi-Conical 13/05/2004 11:26:58</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	106.08	0.000000517	2	3866974.835	2.586E-07
	108.23	0.000000435	2	4595908.205	2.17585E-07
	110.43	0.000000307	2	6506858.25	1.53684E-07
	105.3	0.000000212	2	9426953.088	1.06079E-07
	105.7	0.000000164	2	12228448.13	8.17765E-08
	112.65	0.000000051	2	38848239.8	2.57412E-08
	111.65	0.000000000	2	4191518100	2.38577E-10
	113.93	0.000000000	2	4724668540	2.11655E-10
	113.4	0.000000000	2	4970171170	2.012E-10
				Total Quotient	8.44117E-07

Site: Corbally Wood Location: Position 1 NGR: S 50053 24925 Date: 13/05/04 Officer: Dan Smith	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205 Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
--	---

115 MHz to 170 MHz

<p>45019_MKK04_01 - Corbally Wood 005</p> <p>Start 115.0 MHz; Stop 170.0 MHz Ref: 90 dBµV; Ref Offset: 0.0 dB; 10 dB/div RBW: 100.0 kHz; VBW: 100.0 kHz; Att: 0.0 dB; Swp: 0.0 pS Peak: 153.36 MHz; 72.91 dBµV Transducer Factors: Bi-Conical 13/05/2004 11:33:01</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	153.36	0.000000052	2	38580810.4	2.59196E-08
	154.19	0.000000025	2	80421347.54	1.24345E-08
	160.38	0.000000001	2	2782091093	3.59442E-10
	121.46	0.000000000	2	4439881161	2.25231E-10
	119.26	0.000000000	2	4868232887	2.05413E-10
	146.08	0.000000000	2	5732860128	1.74433E-10
	166.98	0.000000000	2	9085970990	1.1006E-10
	120.23	0.000000000	2	9470465926	1.05591E-10
	144.7	0.000000000	2	10265292906	9.74156E-11
	Total Quotient				3.96317E-08

170 MHz to 230 MHz

<p>45019_MKK04_01 - Corbally Wood 005</p> <p>Start 170.0 MHz; Stop 230.0 MHz Ref: 90 dBµV; Ref Offset: 0.0 dB; 10 dB/div RBW: 100.0 kHz; VBW: 100.0 kHz; Att: 0.0 dB; Swp: 0.0 pS Peak: 191.6 MHz; 90.74 dBµV Transducer Factors: Bi-Conical 13/05/2004 11:36:49</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	191.6	0.000000315	2	6358744.074	1.57264E-07
	215.75	0.000000152	2	13193844.03	7.57929E-08
	192.35	0.000000064	2	31359660.03	3.18881E-08
	190.1	0.000000037	2	53873022.99	1.85622E-08
	197.6	0.000000032	2	63149707.87	1.58354E-08
	199.7	0.000000023	2	86770349.33	1.15247E-08
	194.6	0.000000022	2	91700424.45	1.09051E-08
	182.75	0.000000019	2	104320905	9.58581E-09
	185	0.000000012	2	163821668.9	6.1042E-09
	Total Quotient				3.37462E-07

Site: Corbally Wood Location: Position 1 NGR: S 50053 24925 Date: 13/05/04 Officer: Dan Smith	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205 Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
--	---

230 MHz to 470 MHz


<p>45019_MKX04_01 - Corbally Wood 007</p> <p>Start 230.0 MHz; Stop 470.0 MHz Ref 110 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 300.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 0.0 pS Peak 456.2 MHz; 107.29 dBµV Transducer Factors: Log Periodic 1305/2004 11:43:07</p>	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>S (power density) W/m²</th> <th>ICNIRP Limit W/m²</th> <th>Times less than ICNIRP</th> <th>Quotient</th> </tr> </thead> <tbody> <tr> <td>456.2</td> <td>0.000142121</td> <td>2.281</td> <td>16049.68952</td> <td>6.23065E-05</td> </tr> <tr> <td>284</td> <td>0.000000018</td> <td>2</td> <td>109237397.8</td> <td>9.15437E-09</td> </tr> <tr> <td>282.2</td> <td>0.000000011</td> <td>2</td> <td>174731556.6</td> <td>5.72306E-09</td> </tr> <tr> <td>286.4</td> <td>0.000000011</td> <td>2</td> <td>189832840.4</td> <td>5.26779E-09</td> </tr> <tr> <td>291.8</td> <td>0.000000007</td> <td>2</td> <td>289315263.1</td> <td>3.45644E-09</td> </tr> <tr> <td>276.8</td> <td>0.000000005</td> <td>2</td> <td>423030173.9</td> <td>2.3639E-09</td> </tr> <tr> <td colspan="3"></td> <td>Total Quotient</td> <td>6.23325E-05</td> </tr> </tbody> </table>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient	456.2	0.000142121	2.281	16049.68952	6.23065E-05	284	0.000000018	2	109237397.8	9.15437E-09	282.2	0.000000011	2	174731556.6	5.72306E-09	286.4	0.000000011	2	189832840.4	5.26779E-09	291.8	0.000000007	2	289315263.1	3.45644E-09	276.8	0.000000005	2	423030173.9	2.3639E-09				Total Quotient	6.23325E-05
	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient																																				
	456.2	0.000142121	2.281	16049.68952	6.23065E-05																																				
	284	0.000000018	2	109237397.8	9.15437E-09																																				
	282.2	0.000000011	2	174731556.6	5.72306E-09																																				
	286.4	0.000000011	2	189832840.4	5.26779E-09																																				
	291.8	0.000000007	2	289315263.1	3.45644E-09																																				
	276.8	0.000000005	2	423030173.9	2.3639E-09																																				
				Total Quotient	6.23325E-05																																				

470 MHz to 670 MHz


<p>45019_MKX04_01 - Corbally Wood 008</p> <p>Start 470.0 MHz; Stop 670.0 MHz Ref 80 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 512.0 MHz; 77.27 dBµV Transducer Factors: Log Periodic 1305/2004 11:46:10</p>	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>S (power density) W/m²</th> <th>ICNIRP Limit W/m²</th> <th>Times less than ICNIRP</th> <th>Quotient</th> </tr> </thead> <tbody> <tr> <td>512</td> <td>0.000000141</td> <td>2.56</td> <td>18095947</td> <td>5.5261E-08</td> </tr> <tr> <td>487.5</td> <td>0.000000062</td> <td>2.4375</td> <td>39019884.05</td> <td>2.5628E-08</td> </tr> <tr> <td>518</td> <td>0.000000007</td> <td>2.59</td> <td>396863459.9</td> <td>2.51976E-09</td> </tr> <tr> <td>494</td> <td>0.000000005</td> <td>2.47</td> <td>479775761.5</td> <td>2.08431E-09</td> </tr> <tr> <td>516.5</td> <td>0.000000001</td> <td>2.5825</td> <td>2899891042</td> <td>3.44841E-10</td> </tr> <tr> <td>504</td> <td>0.000000001</td> <td>2.52</td> <td>2902297254</td> <td>3.44555E-10</td> </tr> <tr> <td>492.5</td> <td>0.000000001</td> <td>2.4625</td> <td>2842612028</td> <td>3.51789E-10</td> </tr> <tr> <td>479.5</td> <td>0.000000001</td> <td>2.3975</td> <td>3631616378</td> <td>2.75359E-10</td> </tr> <tr> <td colspan="3"></td> <td>Total Quotient</td> <td>8.68096E-08</td> </tr> </tbody> </table>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient	512	0.000000141	2.56	18095947	5.5261E-08	487.5	0.000000062	2.4375	39019884.05	2.5628E-08	518	0.000000007	2.59	396863459.9	2.51976E-09	494	0.000000005	2.47	479775761.5	2.08431E-09	516.5	0.000000001	2.5825	2899891042	3.44841E-10	504	0.000000001	2.52	2902297254	3.44555E-10	492.5	0.000000001	2.4625	2842612028	3.51789E-10	479.5	0.000000001	2.3975	3631616378	2.75359E-10				Total Quotient	8.68096E-08
	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient																																														
	512	0.000000141	2.56	18095947	5.5261E-08																																														
	487.5	0.000000062	2.4375	39019884.05	2.5628E-08																																														
	518	0.000000007	2.59	396863459.9	2.51976E-09																																														
	494	0.000000005	2.47	479775761.5	2.08431E-09																																														
	516.5	0.000000001	2.5825	2899891042	3.44841E-10																																														
	504	0.000000001	2.52	2902297254	3.44555E-10																																														
	492.5	0.000000001	2.4625	2842612028	3.51789E-10																																														
	479.5	0.000000001	2.3975	3631616378	2.75359E-10																																														
			Total Quotient	8.68096E-08																																															

Site: Corbally Wood Location: Position 1 NGR: S 50053 24925 Date: 13/05/04 Officer: Dan Smith	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205 Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
--	---

670 MHz to 870 MHz

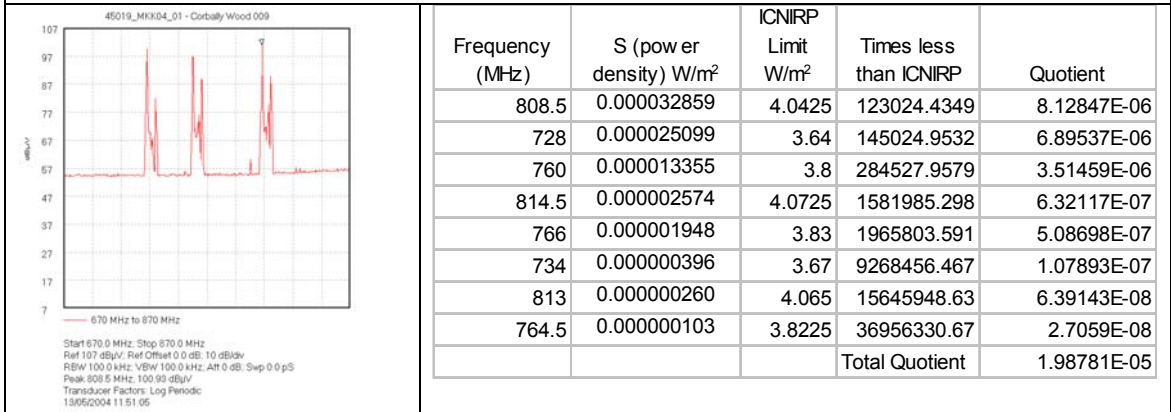



870 MHz to 1 GHz

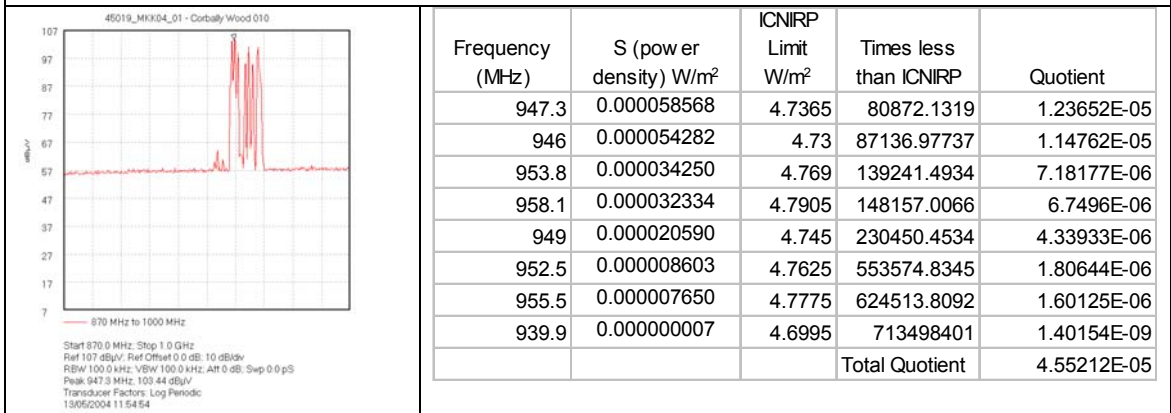

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 1	Antenna: Manufacturer: EMCO Model: 3146A Serial Number: 3993
NGR: S 50053 24925	
Date: 13/05/04	
Officer: Dan Smith	


GSM 900					
<p>45019_MKX04_01 - Corbally Wood 011</p> <p>Start 924.0 MHz; Stop 961.0 MHz Ref 107 dBµV; Ref Offset 0.0 dB; 10 dB/div RESW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 947.22 MHz; 103.66 dBµV Transducer Factors: log periodic 13/05/2004 11:59:22</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	947.22	0.000061611	4.7361	76870.94391	1.30088E-05
	946.11	0.000048715	4.73055	97107.54782	1.02979E-05
	953.69	0.000043517	4.76845	109576.7924	9.12602E-06
	957.95	0.000033240	4.78975	144096.7535	6.93978E-06
	948.88	0.000018778	4.7444	252651.9459	3.95801E-06
	952.3	0.000015089	4.7615	315562.319	3.16895E-06
	955.54	0.000011420	4.7777	418369.7026	2.39023E-06
	958.87	0.000005632	4.79435	851277.3646	1.17471E-06
	945.37	0.000001124	4.72685	4206425.204	2.37732E-07
				Total Quotient	5.03021E-05

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 1	Antenna: Manufacturer: EMCO Model: 3115 Serial Number: 1203
NGR: S 50053 24925	
Date: 13/05/04	
Officer: Dan Smith	

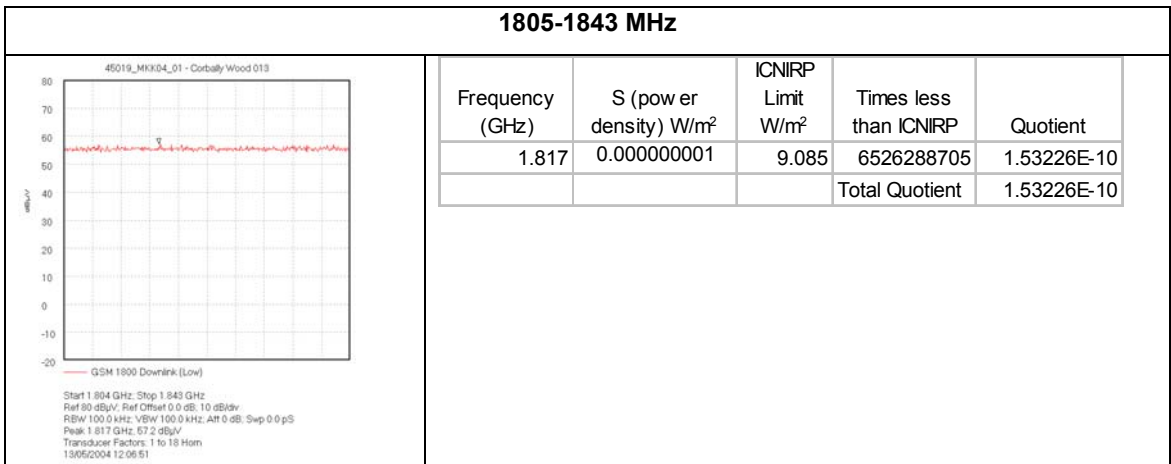
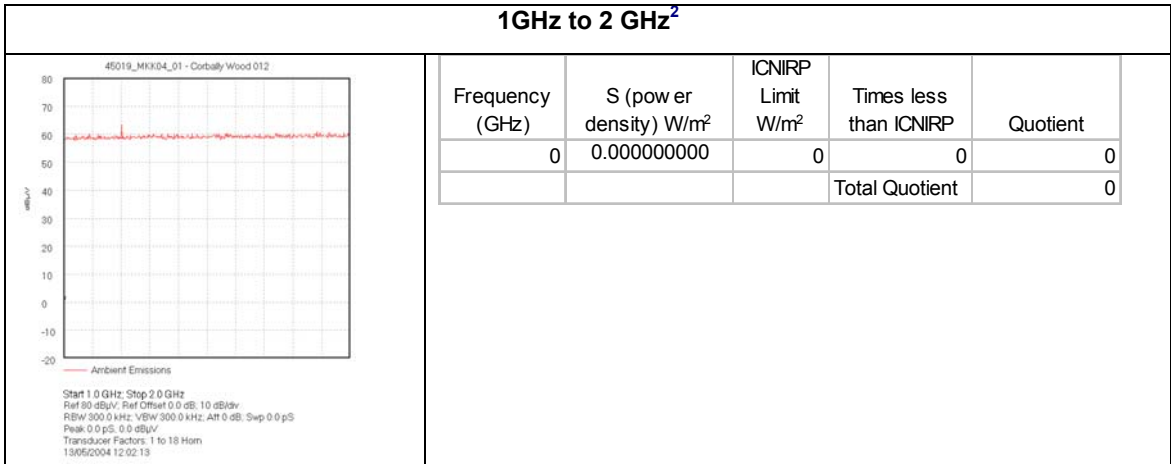


² No signals measured within this band from Position 1 at the time of measurement.


Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 1	Antenna: Manufacturer: EMCO Model: 3115 Serial Number: 1203
NGR: S 50053 24925	
Date: 13/05/04	
Officer: Dan Smith	

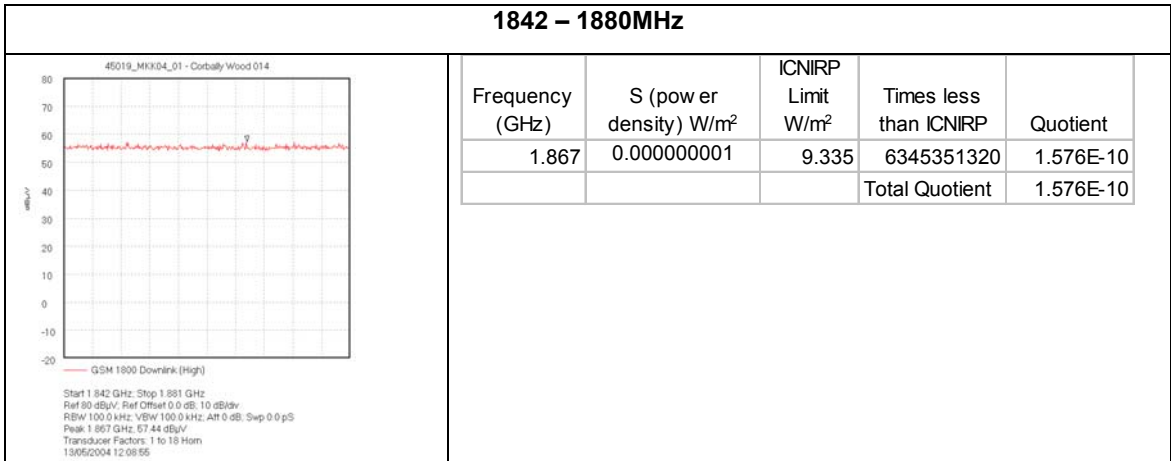

Site: Corbally Wood	Receiver: Manufacturer: Agilent/HP Model: 8565E Serial Number: 3846A01089
Location: Position 1	Antenna: Manufacturer: EMCO Model: 3115 Serial Number: 1203
NGR: S 50053 24925	
Date: 13/05/04	
Officer: Dan Smith	

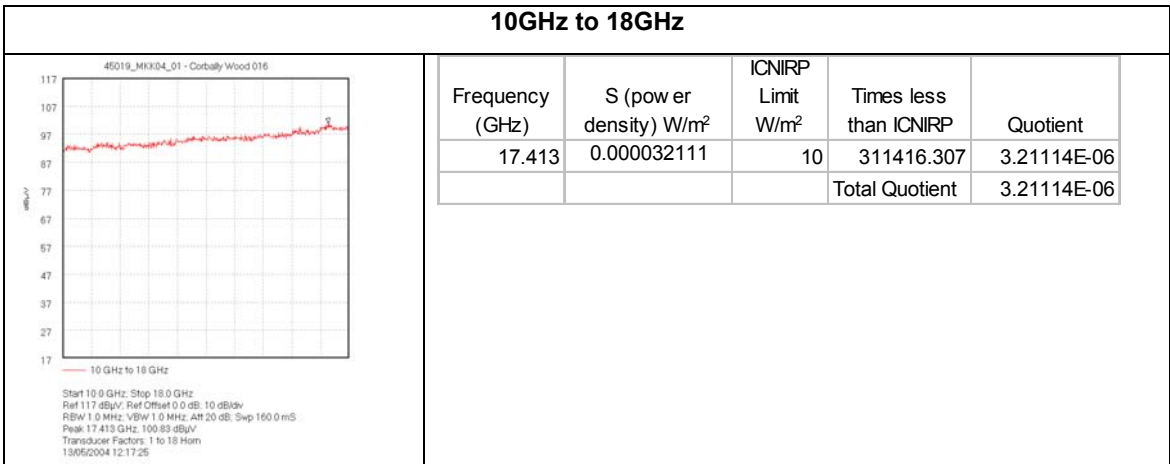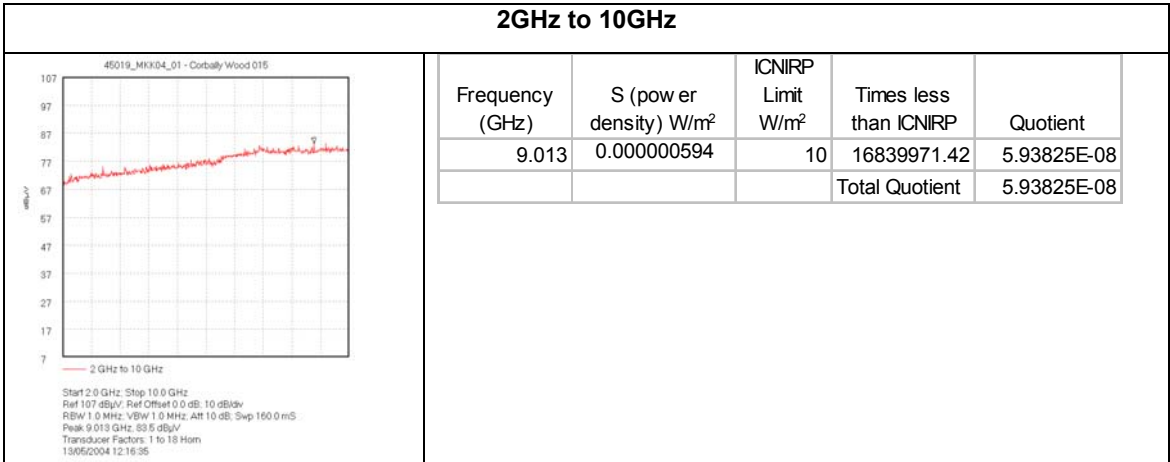



Site: Corbally Wood	Receiver: Manufacturer: Agilent/HP Model: 8565E Serial Number: 3846A01089
Location: Position 1	Antenna: Manufacturer: EMCO Model: 3116 Serial Number: 9611-2330
NGR: S 50053 24925	
Date: 13/05/04	
Officer: Dan Smith	

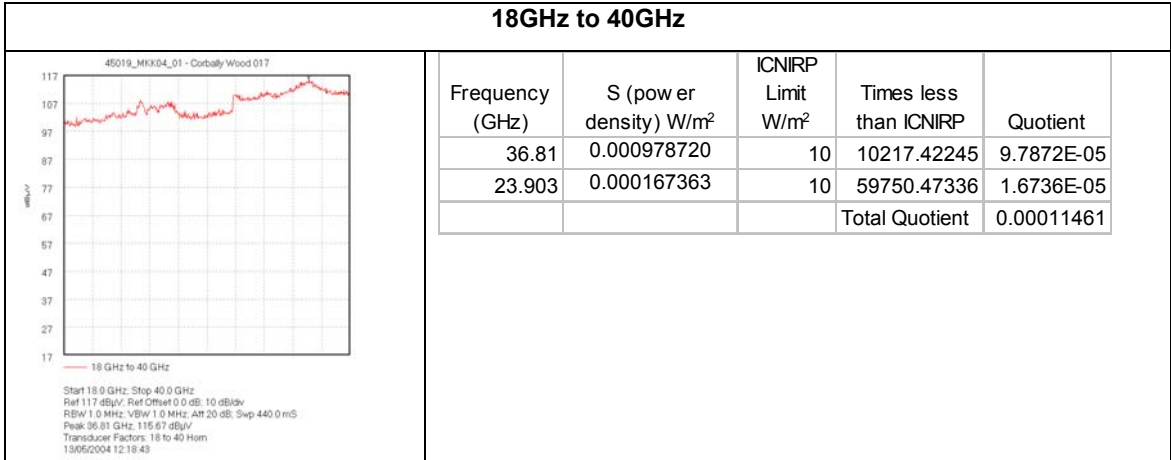

3.2.1.2 Position 2. Corbally Wood, Adjacent to Mast, approximately 30 m North East of Mast.

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 2	Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

30 MHz to 85 MHz					
 <p>45019_MKK04_02 - Corbally Wood 017</p> <p>Start 30.0 MHz; Stop 85.0 MHz Ref 117 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 80.05 MHz; 111.75 dBµV Transducer Factors: Br-Conical 13/05/2004 13:21:48</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	80.05	0.000396879	2	5039.313138	0.00019844
	82.11	0.000034092	2	58663.95595	1.70462E-05
	84.31	0.000028818	2	69401.89771	1.44088E-05
	77.58	0.000008407	2	237887.3486	4.20367E-06
	82.8	0.000001904	2	1050440.229	9.51982E-07
	31.93	0.000001281	2	1560886.577	6.40662E-07
	75.38	0.000001013	2	1974109.988	5.06557E-07
	71.11	0.000000748	2	2675292.955	3.73791E-07
	74.69	0.000000683	2	2926653.76	3.41687E-07
				Total Quotient	0.000236913

85 MHz to 95 MHz					
 <p>45019_MKK04_02 - Corbally Wood 016</p> <p>Start 85.0 MHz; Stop 95.0 MHz Ref 137 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 91.25 MHz; 131.39 dBµV Transducer Factors: Br-Conical 13/05/2004 13:18:03</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	91.25	0.036530755	2	54.74838919	0.018265378
	89	0.029353416	2	68.13517032	0.014676708
	93.42	0.023640608	2	84.60019145	0.011820304
	86.8	0.000033547	2	59617.16855	1.67737E-05
	94.2	0.000001810	2	1105023.072	9.04958E-07
	86.05	0.000000807	2	2479541.297	4.033E-07
					Total Quotient

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 2	Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

95 MHz to 105 MHz

<p>45019_MKK04_02 - Corbally Wood 016</p> <p>Start 95.0 MHz; Stop 105.0 MHz Ref 127 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 95.60 MHz; 126.82 dBµV Transducer Factors: Bi-Conical 13/05/2004 13:09:05</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	98.62	0.012754359	2	156.8091302	0.00637718
	100.8	0.009368254	2	213.4869565	0.004684127
	103.1	0.000529247	2	3778.951742	0.000264624
	96.05	0.000196182	2	10194.62713	9.80909E-05
	95.65	0.000044428	2	45016.46061	2.22141E-05
	96.42	0.000026648	2	75053.56847	1.33238E-05
	97.85	0.000002976	2	672003.2074	1.48809E-06
	103.83	0.000000307	2	6521858.108	1.53331E-07
	102.38	0.000000060	2	33448091.75	2.98971E-08
				Total Quotient	0.01146123

105 MHz to 115 MHz

<p>45019_MKK04_02 - Corbally Wood 014</p> <p>Start 105.0 MHz; Stop 115.0 MHz Ref 100 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 105.33 MHz; 98.85 dBµV Transducer Factors: Bi-Conical 13/05/2004 13:06:46</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	105.33	0.000012843	2	155729.6637	6.42138E-06
	108.23	0.000008369	2	238985.3867	4.18436E-06
	110.43	0.000006232	2	320901.2035	3.11622E-06
	106.08	0.000004883	2	409610.7499	2.44134E-06
	112.65	0.000002714	2	736836.8646	1.35715E-06
	107.48	0.000002222	2	900267.0308	1.11078E-06
	109.65	0.000000161	2	12427144.43	8.0469E-08
	113.43	0.000000082	2	24398961.73	4.09854E-08
	111.2	0.000000038	2	52164055.21	1.91703E-08
				Total Quotient	1.87719E-05

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 2	Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

115 MHz to 170 MHz


<p>45019_MKX04_02 - Corbally Wood 012</p> <p>Start 115.0 MHz; Stop 170.0 MHz Ref 90 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 115.0 MHz; 53.62 dBµV Transducer Factors: Bi-Conical 13/05/2004 13:04:10</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	115	0.000000610	2	3276207.09	3.05231E-07
	118.16	0.000000227	2	8818025.408	1.13404E-07
	115.96	0.000000142	2	14072502.87	7.10606E-08
	120.23	0.000000123	2	16231974.28	6.16068E-08
	117.2	0.000000119	2	16841134.56	5.93784E-08
	153.36	0.000000086	2	23247237.14	4.30159E-08
	119.4	0.000000076	2	26204226.57	3.81618E-08
	122.29	0.000000073	2	27313122.08	3.66124E-08
	154.19	0.000000057	2	35267229.65	2.83549E-08
			Total Quotient	7.56826E-07	

170 MHz to 230 MHz


<p>45019_MKX04_02 - Corbally Wood 012</p> <p>Start 170.0 MHz; Stop 230.0 MHz Ref 90 dBµV; Ref Offset 0.0 dB; 10 dB/dv RBW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS Peak 182.75 MHz; 81.33 dBµV Transducer Factors: Bi-Conical 13/05/2004 13:01:23</p>	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	182.75	0.000000360	2	5551001.515	1.80148E-07
	180.5	0.000000270	2	7402379.49	1.35092E-07
	190.1	0.000000242	2	8248431.002	1.21235E-07
	192.35	0.000000231	2	8657078.306	1.15512E-07
	184.85	0.000000208	2	9624348.618	1.03903E-07
	215.75	0.000000113	2	17716231.47	5.64454E-08
	188	0.000000105	2	19114869.87	5.23153E-08
	178.25	0.000000096	2	20862740.01	4.79323E-08
	191.6	0.000000080	2	25082530.32	3.98684E-08
			Total Quotient	8.52452E-07	

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 2	Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

230 MHz to 470 MHz

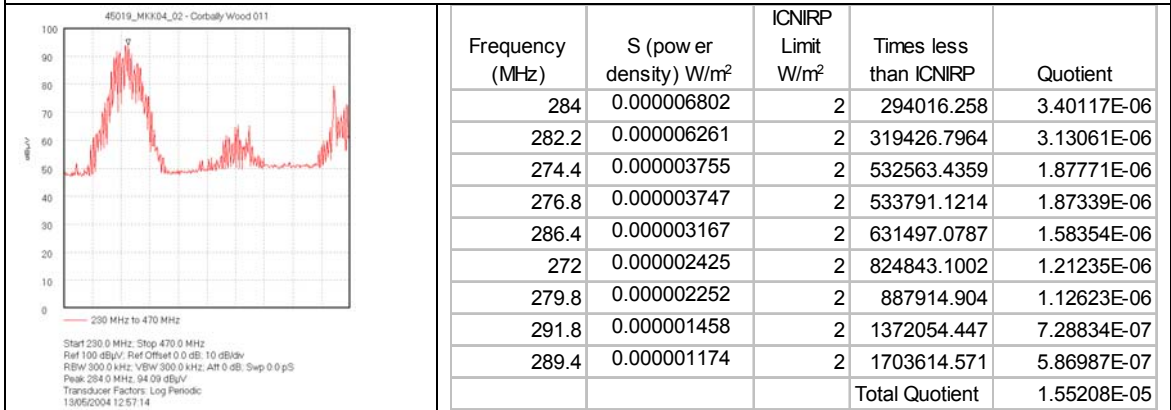

470 MHz to 670 MHz

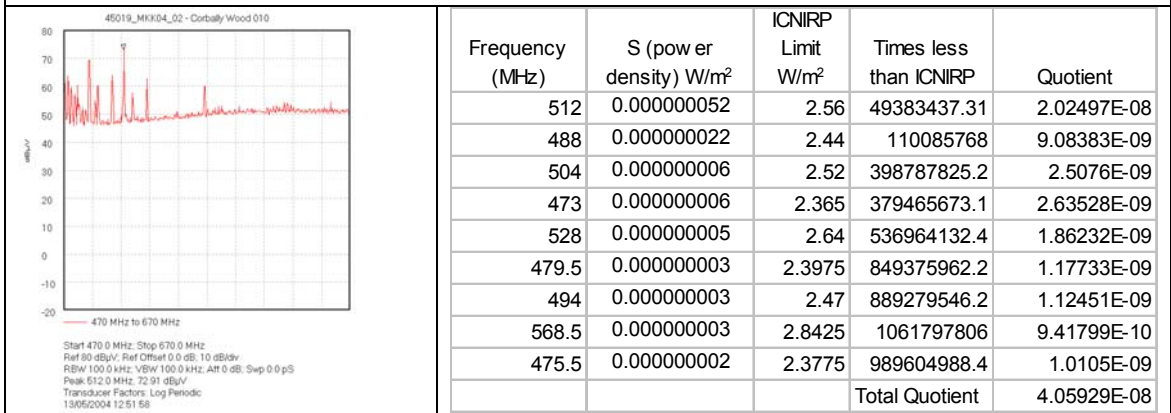

Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 2	Antenna: Manufacturer: Schaffner EMC Systems Serial Number: 3540
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

670 MHz to 870 MHz


	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	808.5	0.000079188	4.0425	51049.4866	1.95888E-05
	760.5	0.000028162	3.8025	135023.8767	7.4061E-06
	728	0.000004772	3.64	762856.2942	1.31086E-06
	814.5	0.000004015	4.0725	1014384.123	9.8582E-07
	766.5	0.000003578	3.8325	1071083.955	9.33634E-07
	813	0.000000739	4.065	5500496.595	1.81802E-07
	764.5	0.000000342	3.8225	11186361.35	8.93946E-08
	734	0.000000213	3.67	17258673.56	5.79419E-08
	Total Quotient				3.05544E-05

870 MHz to 1 GHz

	Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
	959	0.000039324	4.795	121935.4434	8.20106E-06
	955.8	0.000018351	4.779	260422.4262	3.83992E-06
	947.3	0.000016057	4.7365	294984.2931	3.39001E-06
	946.4	0.000013264	4.732	356768.158	2.80294E-06
	949	0.000008603	4.745	551540.7013	1.8131E-06
	952.5	0.000002279	4.7625	2090144.631	4.78436E-07
	953.8	0.000000137	4.769	34735109.53	2.87893E-08
	950.6	0.000000124	4.753	38309736.47	2.6103E-08
	Total Quotient				2.05804E-05



Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 2	Antenna: Manufacturer: EMCO Model: 3146A Serial Number: 3993
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

GSM 900				
Frequency (MHz)	S (power density) W/m ²	ICNIRP Limit W/m ²	Times less than ICNIRP	Quotient
958.96	0.000034567	4.7948	138711.3016	7.20922E-06
955.45	0.000022216	4.77725	215040.0336	4.6503E-06
958.22	0.000016431	4.7911	291592.6587	3.42944E-06
947.31	0.000012696	4.73655	373081.2957	2.68038E-06
946.11	0.000010343	4.73055	457354.5325	2.18649E-06
948.79	0.000008783	4.74395	540109.0486	1.85148E-06
945.37	0.000003887	4.72685	1215942.871	8.22407E-07
952.21	0.000002689	4.76105	1770288.681	5.6488E-07
947.96	0.000000415	4.7398	11431451.2	8.7478E-08
			Total Quotient	2.34821E-05

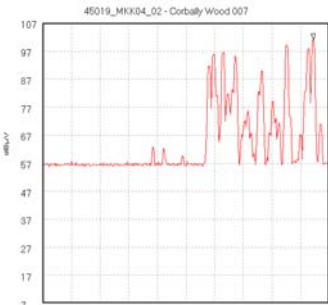


45019_MKX04_02 - Corbally Wood 007
 GSM 900 Downlink
 Start 924.0 MHz; Stop 961.0 MHz
 Ref 107 dBµV; Ref Offset 0.0 dB; 10 dB/div
 REW 100.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 0.0 pS
 Peak 958.96 MHz; 101.15 dBµV
 Transducer Factors: log periodic
 13/05/2004 12:41:28



Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 2	
NGR: S 50025 24876	Antenna: Manufacturer: EMCO Model: 3115 Serial Number: 1203
Date: 13/05/04	
Officer: Dan Smith	

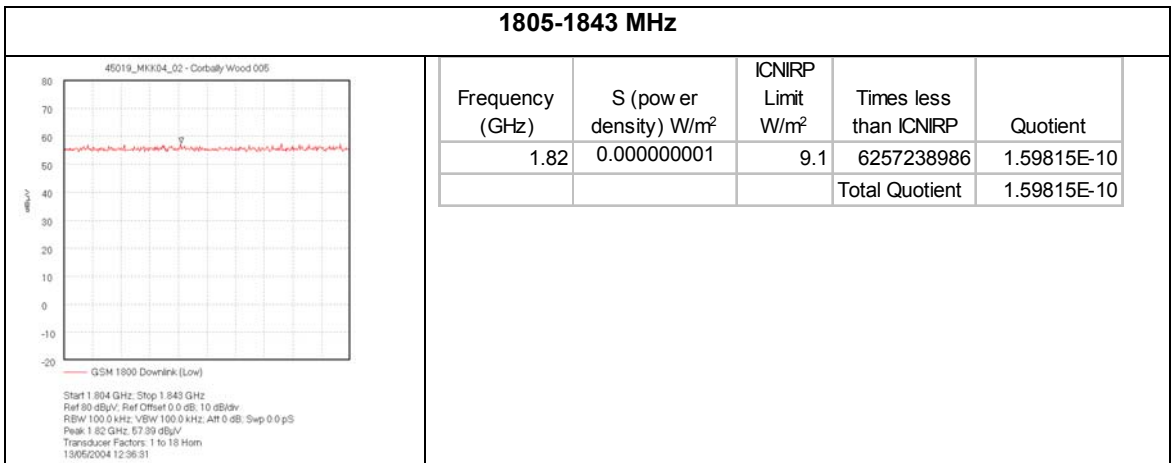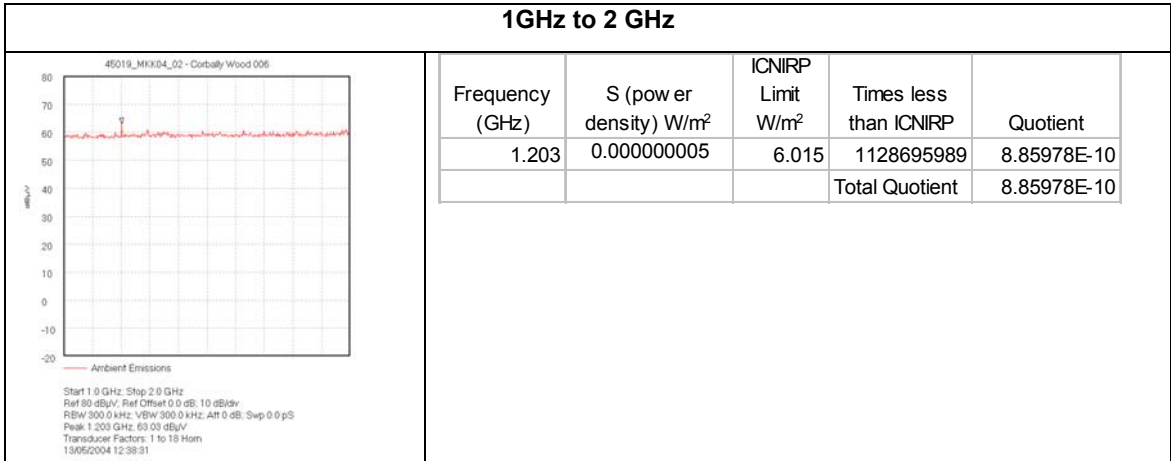


Site: Corbally Wood	Receiver: Manufacturer: Hewlett Packard Model: 8594A Serial Number: 3108U00205
Location: Position 2	Antenna: Manufacturer: EMCO Model: 3115 Serial Number: 1203
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

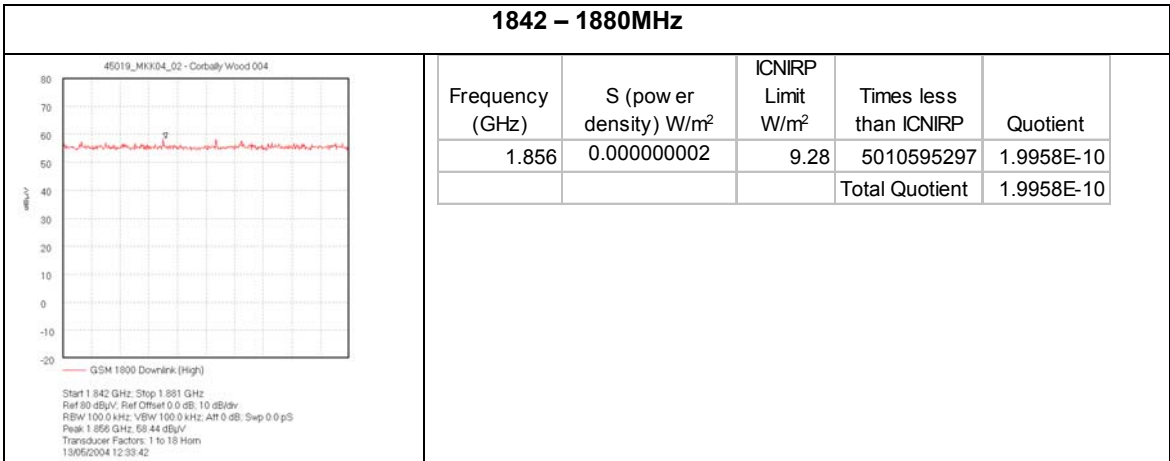

Site: Corbally Wood	Receiver: Manufacturer: Agilent/HP Model: 8565E Serial Number: 3846A01089
Location: Position 2	Antenna: Manufacturer: EMCO Model: 3115 Serial Number: 1203
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

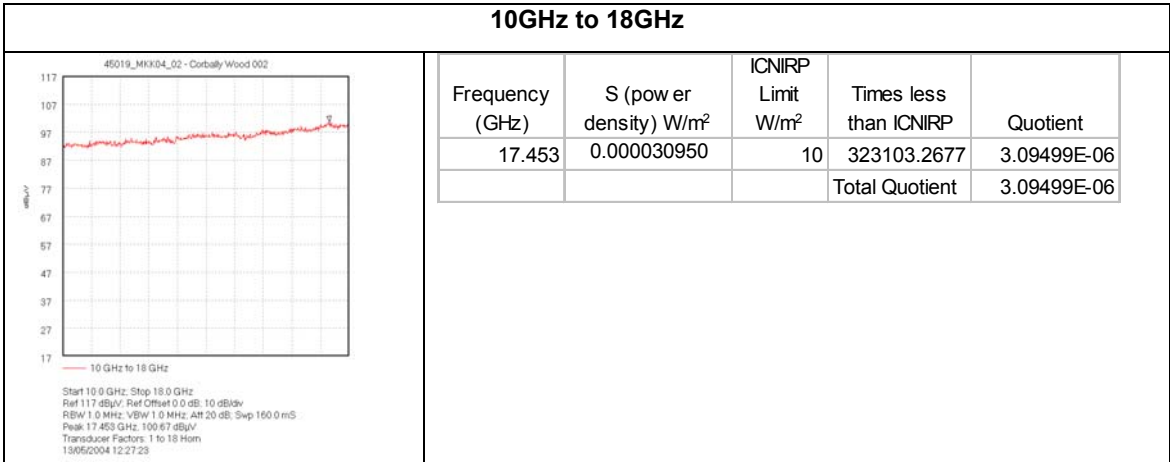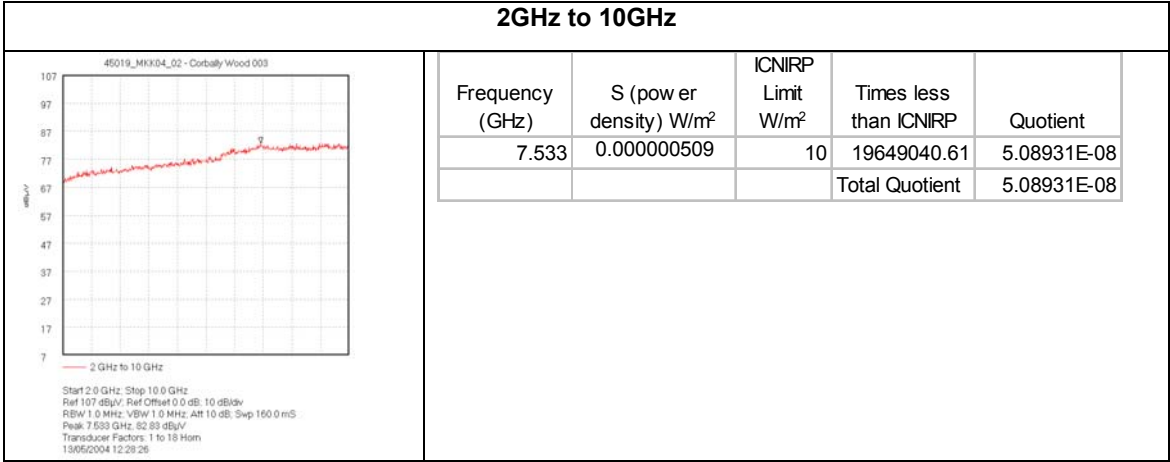

Site: Corbally Wood	Receiver: Manufacturer: Agilent/HP Model: 8565E Serial Number: 3846A01089
Location: Position 2	Antenna: Manufacturer: EMCO Model: 3116 Serial Number: 9611-2330
NGR: S 50025 24876	
Date: 13/05/04	
Officer: Dan Smith	

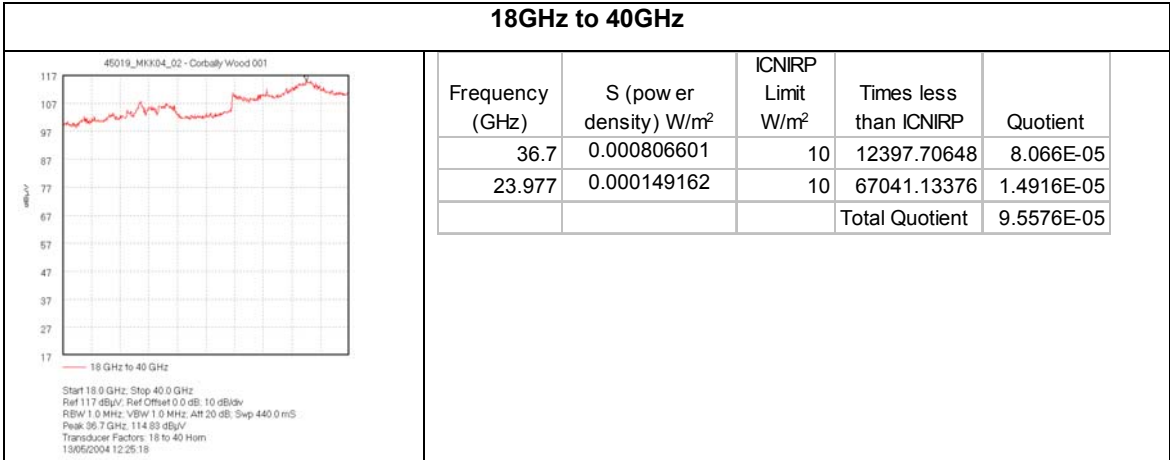

3.2.2 SITE SKETCH MAP


Position 1. Corbally Wood, Adjacent to Masts, approximately 30 m North of RTE Mast. (See Mark 01)

Position 2. Corbally Wood, Adjacent to Mast, approximately 30 m North East of Mast. (See Mark 02)

RADIO FREQUENCY INVESTIGATION LTD

OFF-SITE WORKBOOK
Test No. 45019

For: Mason Communications
Survey Of:
Location:

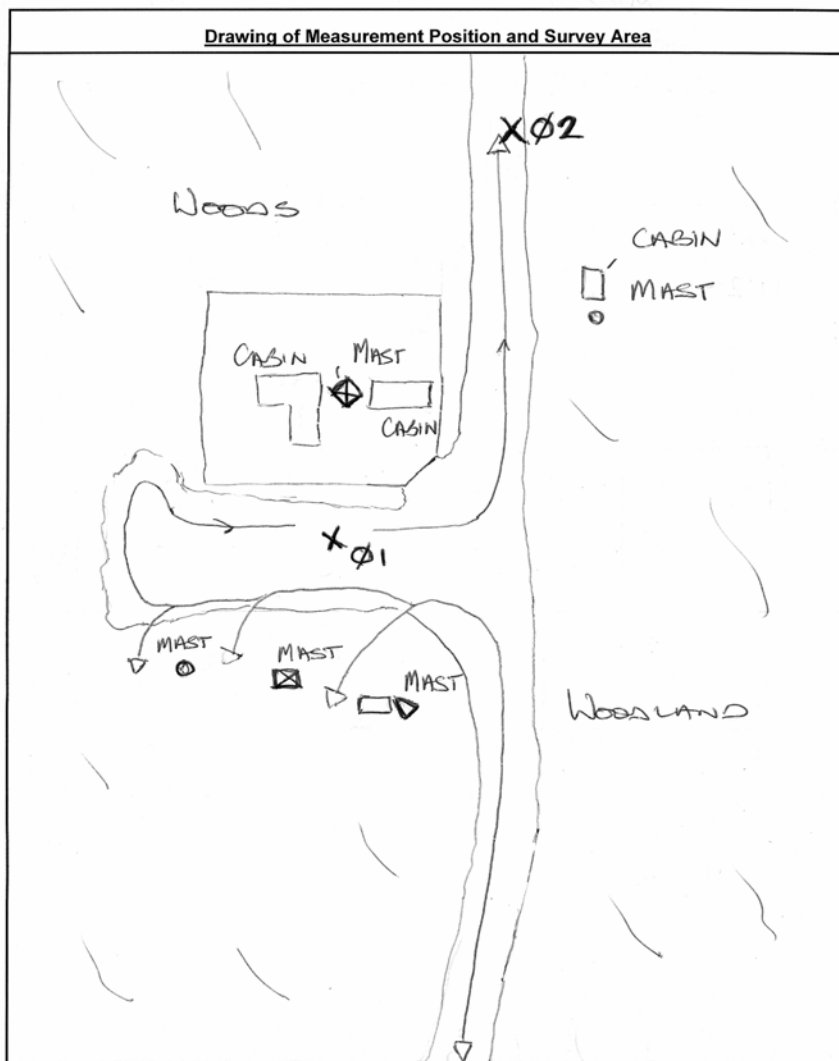

3.2.3 SITE PHOTOGRAPHS

3.2.3.1 Position 1. Corbally Wood, Adjacent to Masts, approximately 30 m North of RTE Mast.



3.2.3.2 Position 2. Corbally Wood, Adjacent to Mast, approximately 30 m North East of Mast.



Annex 1

Non-Ionising Radiation (NIR) and the International Commission for Non-Ionising Radiation Protection (ICNIRP)

Non-ionising Radiation (NIR) Definition

Non-ionising radiation is that part of the electromagnetic spectrum below 2420 million MHz. Radiowaves, infra-red radiation and visible light are examples of NIR. Electromagnetic waves at frequencies above 2420 million MHz (2.4THz) are known as ionising radiation and this includes X-rays and Gamma rays.

Standards for emissions limits for non-ionising radiation

The International Commission for Non-Ionising Radiation Protection (ICNIRP) is an independent, scientific organisation established in 1992. The ICNIRP was established for the purpose of advancing Non-Ionising Radiation Protection for the benefit of people and the environment and in particular to provide guidance and recommendations on protection from NIR exposure. ICNIRP operates in co-operation with the Environmental Health Division of the World Health Organisation and the United Nations Environment Programme. In 1998 ICNIRP issued a position paper on the health and safety aspects of NIR. This reviewed both thermal and athermal effects and its conclusion endorsed the 1988 guidelines produced by the IRPA.

This programme required sites to be in compliance with the ICNIRP (1998) guidelines. A summary of the maximum public exposure levels in the ICNIRP Guidelines for the radio systems in this audit are shown in Table 1. It should be noted that in 1999 the European Commission put out a recommendation³ which proposed to limit exposure of the general public to electromagnetic fields 0 Hz-300 GHz based on a set of basic restrictions and reference levels developed internationally under the advice of the International Commission on Non-Ionising Radiation Protection. In relation to emissions within the radio spectrum, these limits are equivalent to the ICNIRP guideline limits used by the ODTR.

³ Recommendation of the European Council 1999/519/EC of July 12, 1999

ICNIRP limits

In 1998 ICNIRP produced “Guideline for Limiting Exposure to Time-Varying Electric, Magnetic and Electromagnetic Fields (up to 300 GHz)”. ComReg and a large number of international regulators have adopted the 1998 ICNIRP document as the reference for ensuring that NIR levels do not cause an adverse health effect.

The main purpose of the “Guideline for Limiting Exposure to Time-Varying Electric, Magnetic and Electromagnetic Fields (up to 300 GHz)” is to provide guidelines for limiting Electromagnetic Field (EMF) exposure that will provide protection against known adverse health effects. An adverse health effect causes detectable impairment of the health of the exposed individual or his or her offspring.

Two classes of guidance are presented:

- Basic Restrictions
- Reference Levels

Basic Restrictions

Restrictions on exposure to time-varying electric, magnetic and electromagnetic fields that are based on health effects are termed “basic restrictions”. Depending upon the frequency of the field, the physical quantities used to specify these restrictions are current density (J), Specific Absorption Rate (SAR), and power density (S). However, only power density in air, outside the body, can be readily measured in exposed individuals.

Reference Levels

These levels are provided for practical exposure assessment purposes to determine whether the basic restrictions are likely to be exceeded. Some reference levels are derived from basic restrictions using measurement and/or computational techniques, and some address perception and adverse indirect effects of exposure to EMF.

Compliance with the reference levels will ensure compliance with the relevant basic restriction. If the measured or calculated value exceeds the reference level, it does not necessarily follow that the basic restriction will be exceeded. However, when a reference level is exceeded, it is necessary to test compliance with the relevant basic restriction and to determine whether additional protective measures are necessary.

The ICNIRP Guidelines: 1998 reference levels appropriate to the frequency range 100 kHz to 40GHz, covered by this report are given in the table:

FOR MEMBERS OF THE GENERAL PUBLIC

Frequency f (MHz)	Unperturbed RMS Electric Field Strength E(V/m)	Unperturbed RMS Magnetic Strength H(A/m)	Equivalent Plane Wave Power Density (mW/cm ²)	Radio Service
0.003-0.15	87	5	-	
0.15-1	87	0.73/f	-	LW and MW Radio Broadcasting
1-10	$87/f^{1/2}$	0.73/f	-	
10-400	28	0.073	0.2	VHF Radio and Television Broadcasting
400-2000	$1.375f^{1/2}$	$0.0037xf^{1/2}$	f/200	UHF Television Broadcasting and Mobile Telephony Systems
2000-300000	61	0.16	1	Microwave Links, and MMDS

Note: “f” represents the frequency taken from the first column above

The guideline levels are lowest in the 10 MHz to 400 MHz frequency range as at these wavelengths resonance in parts or all of the body may occur resulting in optimum coupling of the radio frequency energy.

The ICNIRP guidelines require that in instances of simultaneous exposure to multiple sources, the sum of the exposure levels should be considered. In the case of the frequency range 30 MHz to 40 GHz, covered by the narrowband equipment used to generate this report, both the electric field strength and the magnetic field strength at each frequency should be expressed as a fraction of the limit at that frequency and both the sum of the electric field strength fractions squared and the sum of the magnetic field strength fractions squared should not exceed unity.

Annex 2

Methodology and measurements

Introduction

Measurements of the non-ionising radiation emissions from each site were conducted, in accordance with ECC Recommendation (02) 04. For the purposes of this programme, measurements were carried out at GSM sites and Mixed Use sites.

Cellular/GSM sites

Cellular/GSM Sites are sites and locations in Ireland at which electronic communications network transmission facilities and/or infrastructure are located, the primary purpose or sole use of such facilities/infrastructure being to facilitate the provision of mobile telephony services in Ireland.

Mixed use site

Mixed use sites are sites and locations in Ireland at which electronic communications network transmission facilities and/or infrastructure are located and where such facilities and or infrastructure is not primarily or solely used to facilitate the provision of mobile telephone services in Ireland.

Methodology

An initial survey of the area was conducted to determine the location(s) of highest non-ionising radiation emissions. At the GSM only site this was done by using a broadband probe and an engineering mobile phone, in conjunction with the appropriate software, to identify the position of maximum field strength. The engineering mobile phone provides an indication of the field strength levels from the GSM channels in use in the vicinity of the site.

Once the locations of the highest field strength emissions were identified, a series of narrowband measurements were taken at these locations. These measurements were taken using a spectrum analyser and associated antennas.

At GSM only sites, measurements were performed over the following frequency range from 300MHz – 2GHz. This range includes both the GSM900 and GSM1800 bands.

For mixed use sites, measurements were performed over the following frequency ranges 30MHz – 40GHz. These measurements included all radio services which are present at these

sites. These services include, GSM, Broadcasting, fixed links, MMDS, FWA. Point to Point links, amongst others.

At both GSM only sites and Mixed Use sites, electric field strength measurements conducted in the frequency bands of interest, are recorded and converted to power density levels for direct comparison with the ICNIRP guideline levels. These power density levels are tabulated alongside the relevant ICNIRP limits. The tables present the highest emission level readings recorded within a band.

Glossary

Antenna:

An antenna transmits energy to or receives energy from space.

Broadband Measurement:

Measurements carried out using a broadband probe measures the maximum power density at the site and compares it to the power density guideline limit in the ICNIRP guidelines. The probe reading is displayed as a percentage ratio of one to the other. In this project, the combined signal strengths of all radio transmissions in the area that is taken over the total range of frequencies between 100kHz to 40GHz is measured. The minimum sensitivity on the probe is 0.3% of the ICNIRP guideline limit, this means the probe will only pick up NIR levels when the level is equal to or greater than 1/3333 of the ICNIRP limit. As most measurements taken at sites using the probe are much less than 1/3333 of the ICNIRP limit, then the reading on the probe is generally zero.

Electric field strength:

This is a quantitative expression of the intensity of an electric field at a particular location. This is measured in volts per metre (V/m)

EMF:

Electric, magnetic, and electromagnetic fields.

Exposure:

This is the highest measured electric field strength converted to a power density equivalent.

Frequency:

The number of sinusoidal cycles completed by electromagnetic waves in 1 s; usually expressed in hertz (Hz).

Frequency Band:

A specific range of frequencies in the radio frequency spectrum, where each band has a defined upper and lower frequency limit.

ICNIRP:

International Commission for Non-Ionising Radiation Protection.

ICNIRP Limit:

This is the reference level, provided by the International Commission for Non-Ionising Radiation Protection (ICNIRP), for the maximum permitted non-ionising radiation emission levels for public exposure.

Reference Levels are frequency dependent and are currently defined as follows:

Frequency	ICNIRP Limit
10 – 400MHz	2W/m ²
400 MHz – 2GHz	((frequency in MHz)/200)W/m ²
2GHz – 300GHz	10 W/m ²

Narrowband Measurement:

Measurements carried out in specific frequency bands using a spectrum analyser and suitable antennas. The analyser is set up to measure one frequency band at a time to provide accurate readings over the particular range chosen.

Non-Ionizing Radiation (NIR):

Includes all radiations and fields of the electromagnetic spectrum that do not normally have sufficient energy to produce ionization in matter; characterized by energy per photon less than about 12 eV, wavelengths greater than 100 nm, and frequencies lower than 3×10^{15} Hz.

Power Density:

This is the radiant power incident perpendicular to a surface, divided by the area of the surface and is expressed in watts per square metre.

Quotient:

This is the ratio of the ICNIRP Limit to the maximum measured power density at a particular frequency. If the ratio is equal to or less than 1, then exposure levels are equal to or less than the ICNIRP Limits for the measured frequency.

Total Quotient:

This is the sum of the Quotients for a particular frequency band, or all measured bands, at the location of highest emissions at the site being measured.