

1. Survey Summary

Address of Transmitter Site Surveyed:	MacCurtain St., Cork City
Site Type:	GSM, UMTS
Survey Date:	27/05/10

Measurement Location: (at point of maximum non-ionising radiation near site)	At the T junction where York Street meets Wellington road.
---	--

Measurement Location Coordinates:		deg	min	sec	
	Latitude:	N	51	54	8
	Longitude:	W	8	27	59

Purpose and Conduct of Survey:

Non-ionising electromagnetic radiation levels were measured at the point of highest emissions which was determined near the site, in order to **assess compliance with** the international **ICNIRP Limits** for general public exposure to non-ionising radiation.

Compliance with the ICNIRP Limits is a **condition** of various wireless transmission **licences** issued by the **Commission for Communications Regulation (ComReg)**.

Overall Conclusions of the Survey

Frequency Selective Measurements: (Individual emissions measured at specific frequencies)	Below ICNIRP Public Limits (Compliant)
Total Exposure Quotient: (Assessment of cumulative emissions from multiple transmitters)	Below ICNIRP Public Limits (Compliant)

2. Surveyors

Survey conducted on behalf of ComReg by:



Vilicom Engineering Ltd, 14 Joyce Way, Park West Business Park, D12

Survey Engineer(s):	Report Writer:	Report Reviewer:
Dermot Spillane, BE	Dermot Spillane, BE	John Ryan, BSc

3. Survey Location Details

Transmitter Site Photo




Survey Weather Conditions

Sky:
Clear

Temperature:
15° C

Relative Humidity:
38%

Map of Transmitter Site and Measurement Location

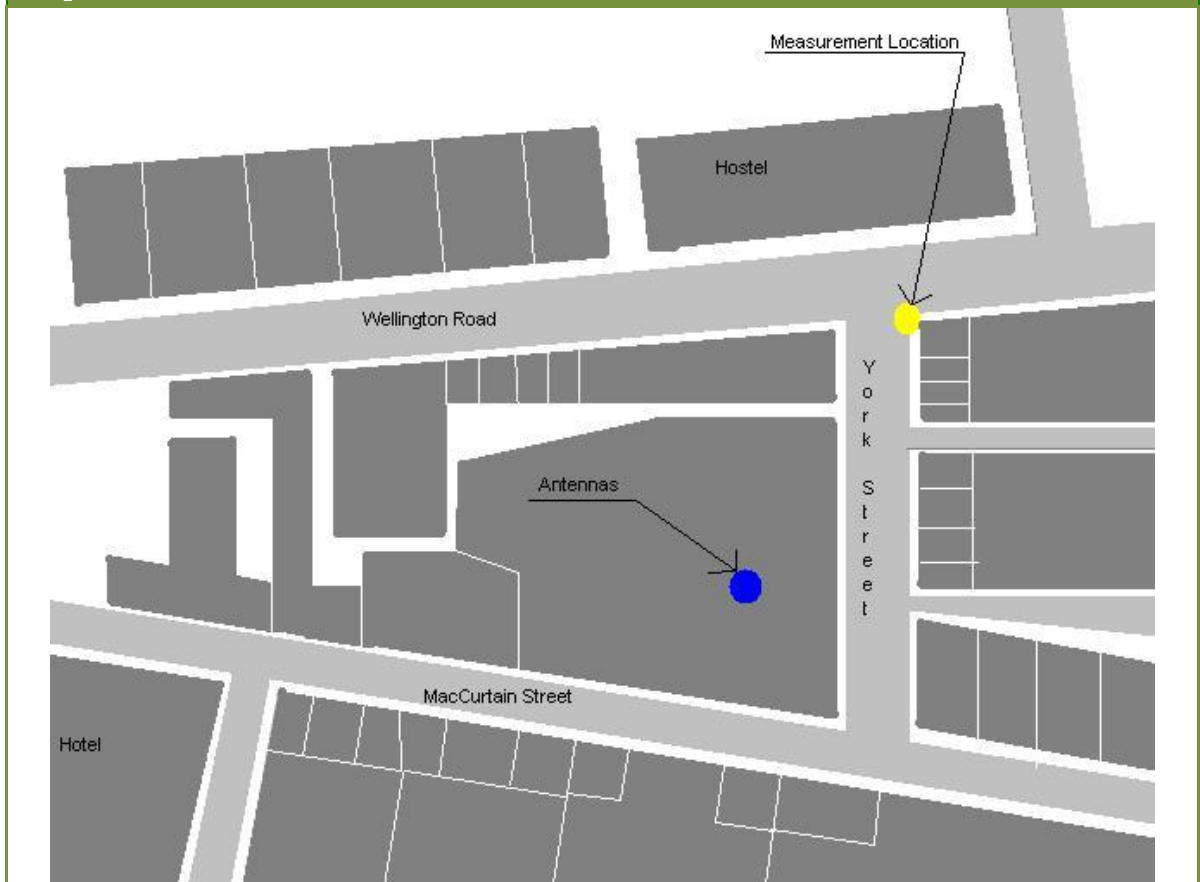

4. Introductory Note

Purpose of Survey

The survey of the designated transmitter site was commissioned by the Commission for Communications Regulation (ComReg) as part of its Programme of Measurement of Non-Ionising Radiation Emissions. The purpose of the survey was to assess whether non-ionising electromagnetic radiation emissions from the site were compliant with the limits specified in the guidelines¹ published by the International Commission on Non-Ionizing Radiation Protection (ICNIRP). Compliance with the ICNIRP limits is a condition of various Wireless Telegraphy licences (e.g. GSM and UMTS Mobile telephony, wireless broadband, broadcasting etc.) issued by ComReg.

Survey Methodology

Measurements of the non-ionising radiation emissions from the site were conducted in accordance with the methodology outlined in document ComReg 08/51R², which incorporates many of the measurement methods and procedures outlined in ECC Recommendation (02)04³.

Note re this Report Version

If you have downloaded this report from www.siteviewer.ie or from www.comreg.ie, you are reading an abbreviated version. In addition to sections 1 to 8, the full extended technical version of this report contains a comprehensive technical record of the measurements and any calculations performed, a list of equipment used, as well as a technical appendix. A copy of the extended report is available on request from ComReg.

¹ “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”, International Commission on Non-Ionizing Radiation Protection, Published in ‘Health Physics’, April 1998, Volume 74, Number 4. www.icnirp.de

² <http://www.comreg.ie/fileupload/publications/ComReg0851R.pdf>

³ ECC REC (02)04 (revised Bratislava 2003, Helsinki 2007), “Measuring Non-Ionising Electromagnetic Radiation (9 kHz – 300 GHz), published by the European Communications Committee on www.ero.dk.

5. Survey Overview

Survey Stages

In accordance with the methodology outlined in document ComReg 08/51R, the survey was conducted in three stages as follows:

- 1 Initial Site Survey
- 2 Full Survey – Broadband Measurements
- 3 Full Survey – Frequency Selective Measurements

Brief outlines of each stage, along with results and conclusions of the measurements are presented in the three sections which follow.

Measurement of Electromagnetic Fields

Electromagnetic fields can be sub-divided into two components:

- (1) Electric field **E** [measured in Volts per metre or V/m]
- (2) Magnetic field **H** [measured in Amperes per metre or A/m]

The E-field and the H-field are mathematically interdependent⁴ in the **far-field** which is the region⁵ where the distance from the radiating antenna exceeds the wavelength of the radiated electromagnetic field. The measurement locations for most transmitter installations lie well within the far-field, as the wavelengths of the transmitted signals are relatively short and the antennas are typically located many metres from any public area. The following table shows wavelengths for commonly transmitted signals:

Transmitter Type	Frequency	Wavelength
PMR Low Band VHF	68 MHz	4.41 m
UHF TV	470 MHz	0.64 m
GSM 900 (mobile phone base)	925 MHz	0.32 m
GSM 1800 (mobile phone base)	1805 MHz	0.17 m
UMTS (mobile phone base)	2110 MHz	0.14 m

In the far-field only one component needs to be measured, as the other component can be easily derived from it. Normally it is only the electric field which is measured in this region.

In the case of transmitters of very long wavelength signals, such as long wave radio (1.19 km wavelength), the H-field and E-field must be measured separately as the point of measurement will most likely lie within the **reactive near-field** region. This is the region located less than one wavelength from the radiating antenna. Here, the relationship between E and H becomes very complex and there is no direct correlation between both components of the electromagnetic field.


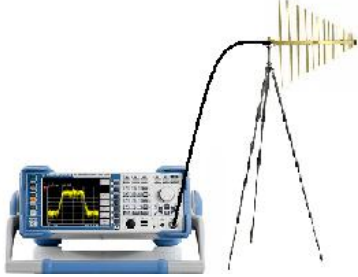

⁴ $E = H \times Z_0$ where Z_0 (characteristic impedance of free space) $\approx 377 \Omega$

⁵ Beyond a distance of $\lambda + 2D^2/\lambda$ where λ is the wavelength and D is the antenna's largest dimension

Measurement Equipment

The measurement of electromagnetic fields is a complex process which involves the use of various meters, spectrum analysers, probes and antennas, which are appropriate to the frequencies of the emissions being measured.

The table below shows examples of equipment typically used to measure electromagnetic fields in non-ionising radiation surveys.

Initial Site Survey and Broadband Measurements	Frequency Selective Measurements	
 <p>Used to measure the overall electric or magnetic field present over a range of frequencies. (e.g. 100kHz to 3GHz)</p>	<p>SPECTRUM ANALYSER WITH TRIPOD MOUNTED ANTENNA</p>  <p>Spectrum analysers are used to measure individual emissions at specific frequencies. The individual emissions contribute to the overall electromagnetic field. Examples of individual emissions are a TV signal and a mobile phone signal for a particular mobile operator. There may be a number of emissions from different transmitters contributing to the overall electromagnetic field at a particular location.</p>	<p>PORTABLE SPECTRUM ANALYSER WITH ANTENNA DIRECTLY CONNECTED</p> 

6. Initial Site Survey

An initial survey was carried out in the area around the designated transmitter site in order to determine the point of maximum non-ionising radiation (NIR). This is the location at which the overall electrical field strength level measured was somewhat higher than that measured in all other areas around the site and represents the highest level of exposure to which a member of the general public might be subjected in the vicinity of the transmitter.

For this initial survey a calibrated **field strength meter** fitted with an **18 GHz isotropic probe** was used. The meter and probe were used to measure the sum of all electrical fields present at **all frequencies from 3 MHz up to 18 GHz**.

Once the point of maximum NIR was determined, broadband and frequency selective measurements were conducted at that location (see following two sections).

For the duration of those measurements, the various instruments, antennas and probes used were mounted on non-metallic supports.


7. Full Survey – Broadband Measurements

The purpose of these measurements was to get an overview of the intensity of the electromagnetic field present at the point of maximum NIR near the site. There, the field strength meter and probe combination were mounted on a tripod and were set to record, over a six minute period, simultaneous measurements of the sum of all received signals within the frequency range of the probe.

The broadband measurement results presented in the graph and table below show the levels in Volts per metre (V/m) recorded in the course of the six minute measurement. The average and maximum levels can be compared to the lowest maximum ICNIRP general public guideline limit which is 28 V/m.

If a broadband measurement is higher than 28 V/m, it does not necessarily follow that the ICNIRP Limits have been exceeded, as the limits are frequency dependent. For example, if the emissions are in the 2100 MHz UMTS mobile phone frequency band, then the limit which applies is higher at 61 V/m. A more detailed investigation involving frequency selective measurement is necessary to assess compliance with the ICNIRP Limits (see next section).

Electric field strengths recorded over 6 min period using 18 GHz probe at point of max NIR:

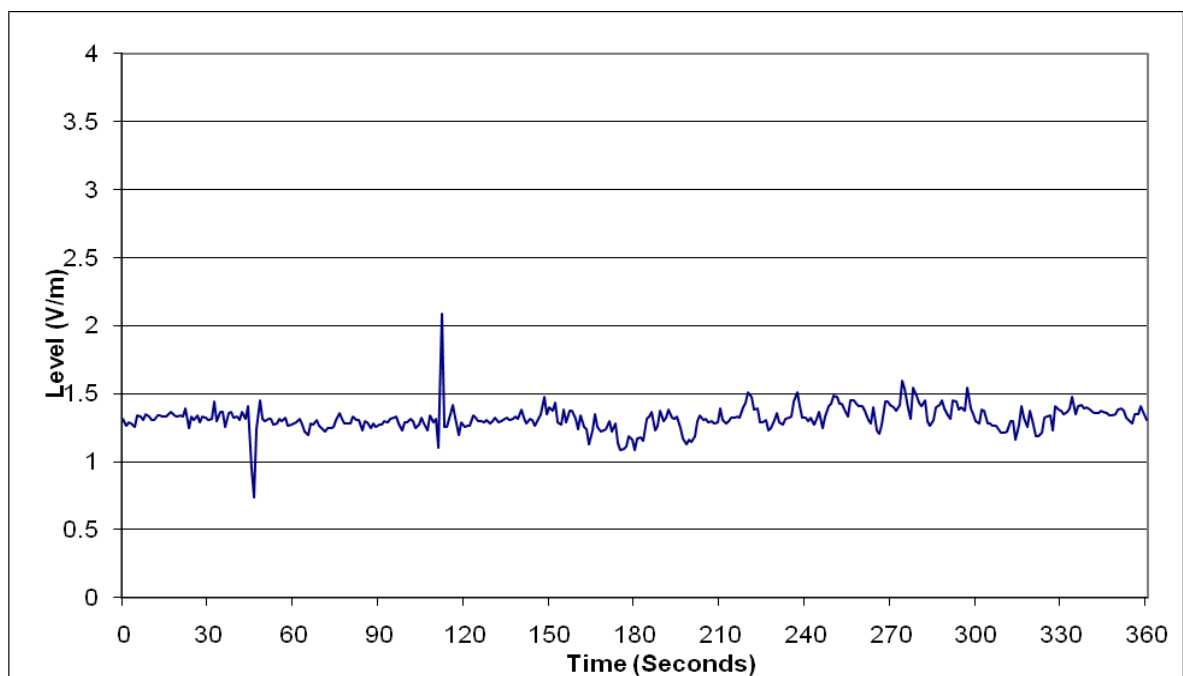

Acquisition Mode: 1 Sec. Sampling

Mean Measurement:	1.32	Peak Measurement:	2.09
Date:	27/05/2010	Start Time:	12:03
Meter:	Narda NBM 550	Probe:	EF 1891 (3 MHz - 18 GHz)

Conclusion of the Broadband Measurements

The mean and peak measurements were below the lowest ICNIRP guideline limit of 28 V/m.

8. Full Survey – Frequency Selective Measurements

Basic Measurement Procedure

A more detailed survey was performed at the point of maximum NIR near the site in order to identify the individual transmit frequencies and field strengths of each type of emission (e.g. mobile telephone GSM and UMTS, wireless broadband, TV, radio signals etc) and their contribution to the total electromagnetic field. The measurements were performed using spectrum analyser equipment and a range of antennas to match the frequency bands in which emissions were measured.

Table of Measurement Results

A list of the measurements made is presented in the table on the next page. For each emission measured, the table shows:

- **Emission Type** (e.g. GSM or UMTS mobile phone, TV etc)
- Transmission **frequency** of the signal
- **Measured Level** (in Volts per metre, V/m)
- **Adjusted Level** if applicable (to account for the characteristics of certain signal types or to compensate for limitations of measurement equipment or to estimate emissions for max call or data traffic)
- **ICNIRP Limit** for Public Exposure

For further details of Adjusted Levels and ICNIRP Limits, please see the explanatory notes which follow the table of measurement results.

Assessment of ICNIRP Compliance of Individual Emissions

The levels for each emission measured, which have been adjusted where necessary, are compared to the relevant ICNIRP general public guideline limit which applies at the particular frequency of the emission. It should be noted that the ICNIRP guideline limits vary according to frequency. The limits for the different measurements presented in the tables will vary as the measurements have been performed at different frequencies.

Assessment of ICNIRP Compliance of Cumulative Emissions

The levels measured for individual emissions are used to calculate two **Total Exposure Quotients** in order to assess the cumulative effect of emissions from multiple transmitters. For further details of the quotients, please see the explanatory notes which follow the tables of measurement results.

The calculated values of the quotients must be ≤ 1 in order for the aggregate of NIR emissions to satisfy the criteria of the ICNIRP Guidelines.

Table of Frequency Selective Measurement Results

Emission Type	Frequency	Measured Level (V/m)	Adjusted Level (V/m)	ICNIRP Limit (V/m)	Times below Limit [adjusted Values]
PMR	Not disclosed	0.004350	0.004350	28	6437
FM Radio	89.687	0.032847	0.032847	28	852
FM Radio	101.508	0.029376	0.029376	28	953
FM Radio	94.128	0.027797	0.027797	28	1007
FM Radio	92.010	0.027669	0.027669	28	1012
FM Radio	94.812	0.025235	0.025235	28	1110
FM Radio	106.155	0.019566	0.019566	28	1431
PMR	Not disclosed	0.006187	0.006187	28	4525
PMR	Not disclosed	0.005848	0.005848	28	4788
PMR	Not disclosed	0.002241	0.002241	28	12493
PMR	Not disclosed	0.002101	0.002101	28	13325
PMR	Not disclosed	0.002097	0.002097	28	13355
T-DAB	227.600	0.008492	0.010035	28	2790
TETRA	Not disclosed	0.009047	0.015670	28	1787
TETRA	Not disclosed	0.008700	0.015068	28	1858
TETRA	Not disclosed	0.003289	0.005696	28	4916
TETRA	Not disclosed	0.003073	0.005322	28	5261
TETRA	Not disclosed	0.002649	0.004587	28	6104
TETRA	Not disclosed	0.002512	0.004351	28	6436
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	7348
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	8164
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	8137
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	8201
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	10210
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	51101
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	17818
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	35065
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	48639
PMR	Not disclosed	Not disclosed	Not disclosed	Not disclosed	60703
TV PAL	671.667	0.072194	0.091488	35.6	390
TV PAL	647.467	0.044720	0.056671	35.0	617
TV PAL	615.933	0.030903	0.039162	34.1	871
TV PAL	719.240	0.041976	0.053194	36.9	693
TV PAL	783.453	0.009817	0.012441	38.5	3093
TV PAL	727.267	0.009005	0.011412	37.1	3249
TV PAL	807.533	0.010864	0.013768	39.1	2838
TV PAL	759.373	0.011803	0.014958	37.9	2533
TV PAL	851.107	0.005794	0.007343	40.1	5463
TV DVB-T	664.333	0.018514	0.048696	35.4	728

Results continued on the next page.....

Emission Type	Frequency	Measured Level (V/m)	Adjusted Level (V/m)	ICNIRP Limit (V/m)	Times below Limit [adjusted Values]
GSM	947.633	0.065088	0.130176	42.3	325
GSM	946.117	0.051168	0.102336	42.3	413
GSM	937.950	0.037584	0.075167	42.1	560
GSM	940.517	0.013351	0.026701	42.2	1579
GSM	953.117	0.023659	0.047318	42.4	897
GSM	938.767	0.026242	0.052484	42.1	803
GSM	1833.000	0.090469	0.180938	58.9	325
GSM	1843.750	0.089640	0.179279	59.0	329
GSM	1835.500	0.034316	0.068633	58.9	858
GSM	1854.500	0.024946	0.049892	59.2	1187
GSM	1847.000	0.023878	0.047756	59.1	1237
GSM	1865.000	0.021306	0.042612	59.4	1394
UMTS FDD	2126.133	0.392193	2.536213	61	24
UMTS FDD	2132.433	0.365595	2.364208	61	26
UMTS FDD	2168.367	0.240713	1.556631	61	39
UMTS FDD	2146.900	0.019253	0.124505	61	490
UMTS FDD	2119.133	0.007745	0.050082	61	1218
UMTS FDD	2113.767	0.007337	0.047444	61	1286
WiFi	2415.308	0.008443	0.032759	61	1862
WiFi	2465.130	0.005297	0.020551	61	2968
MMDS PAL	2525.420	0.034277	0.043437	61	1404
MMDS PAL	2653.760	0.030200	0.038271	61	1594
MMDS PAL	2557.040	0.028907	0.036632	61	1665
MMDS PAL	2669.260	0.028151	0.035675	61	1710
MMDS PAL	2509.300	0.025942	0.032875	61	1856
MMDS PAL	2677.940	0.025852	0.032762	61	1862
MMDS DVB-T	2515.500	0.009343	0.024575	61	2482
MMDS DVB-T	2550.220	0.007568	0.019907	61	3064
MMDS DVB-T	2609.120	0.008375	0.022029	61	2769
MMDS DVB-T	2566.340	0.007178	0.018880	61	3231
MMDS DVB-T	2575.020	0.006784	0.017844	61	3418
MMDS DVB-T	2646.320	0.006958	0.018302	61	3333
FWALA	3582.000	0.009026	0.022769	61	2679
FWALA	3514.000	0.000909	0.002293	61	26606
FWALA	3589.667	0.000761	0.001920	61	31767
FWALA	10246.953	0.002982	0.010638	61	5734

Total Exposure Quotients [calculated from Adjusted Levels]

Quotient	Frequency Range	Calculated Quotient Value	Limit
Electrical Stimulation Effects	1 Hz to 10 MHz	n/a	1
Thermal Effects	100 kHz and above	0.003956	1

Conclusions of Frequency Selective Measurements

Frequency Selective Measurements:

(Individual emissions measured at specific frequencies)

Below ICNIRP Public Limits (Compliant)

Total Exposure Quotient:

(Assessment of cumulative emissions from multiple transmitters)

Below ICNIRP Public Limits (Compliant)

Adjusted Levels⁶


For some emissions an adjusted level has been calculated from the measured level for any or all of the following reasons:

- to compensate for the limited measurement resolution of the spectrum analyser. For example, a measurement of a digital television signal performed with at a resolution of 5 MHz needs to be adjusted upwards using a correction factor in order to account for the energy present within the full 7.6 MHz bandwidth of the signal.
- to extrapolate to an estimate of the level under maximum traffic from the transmitter. For example, the base stations of mobile telephone networks produce emissions which vary according to the changing volume of calls or data traffic over the course of the day.
- to account for the characteristics of certain complex signal types (e.g. analogue PAL TV).

The ICNIRP Public Exposure Limit

The ICNIRP Limits vary according to the frequency of the emissions, as illustrated here.

It can be seen that the limits applicable to GSM 900 mobile phone transmissions are higher than those applicable to UHF TV transmissions.

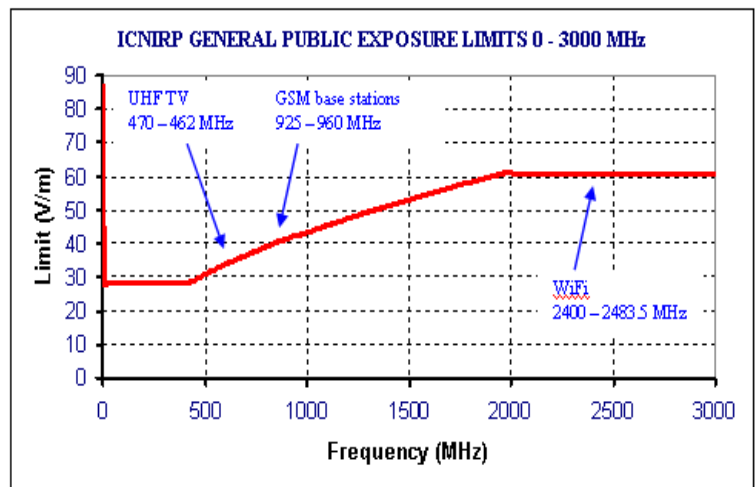

Total Exposure Quotients

The Total Exposure Quotients (which must be ≤ 1) are calculated, in accordance with mathematical formulas specified in the ICNIRP Guidelines, in order to assess the cumulative effect of emissions from multiple transmitters. The quotients in this report are calculated from the Adjusted Levels rather than from the Measured Levels, in order to account for total potential public exposure under maximum traffic conditions. The two quotients are as follows:

Quotient for Electrical Stimulation Effects (1 Hz to 10 MHz)

This quotient is calculated only in a small number of cases where strong emissions in the frequency range between 1 Hz and 10 MHz are present at the survey location (e.g. near a long wave radio transmitter site).

Quotient for Thermal Effects (100 kHz and above)

The measurements of any emissions above 100 kHz are used to calculate a Quotient to assess any thermal (heat) effects.

⁶ See appendices to the extended technical version of this report for further details re calculation of adjusted levels.