

## 1. Survey Summary

<b>Address of Transmitter Site Surveyed:</b>	Killeen Road, Cherry Orchard, Dublin 10
<b>Site Type:</b>	GSM, UMTS, LTE
<b>Survey Date:</b>	17/12/2019

<b>Measurement Location:</b> (at point of maximum non-ionising radiation near site)	On public footpath on Le Brocquai Avenue, to the side of 'Micks Garage'
----------------------------------------------------------------------------------------	-------------------------------------------------------------------------

Measurement Location Coordinates:	LAT				LONG			
	<i>deg</i>	<i>min</i>	<i>sec</i>		<i>deg</i>	<i>min</i>	<i>sec</i>	
	N	53	20	1.1	W	6	21	24.8

### Purpose and Conduct of Survey:

The purpose of this survey was to assess compliance with the limits for general public exposure to non-ionising radiation (**NIR**) set by the International Commission on Non-Ionising Radiation Protection (**ICNIRP**) ("**ICNIRP Public Exposure Limits**").

Compliance with the ICNIRP Public Exposure Limits is a condition of a General Authorisation for an electronic communications network/service as well as of various Wireless Telegraphy licences issued by the Commission for Communications Regulation (**ComReg**).

The survey was conducted by:

- measuring the overall electromagnetic field (**EMF**) present at the point of highest exposure in a public area associated with the designated transmitter site;
- identifying the frequency of the principal emissions contributing to the EMF; and
- measuring the intensity (or level) of same.

### Overall Conclusions of the Survey

<b>Frequency Selective Measurements:</b> (Individual emissions measured at specific frequencies)	<b>Below ICNIRP Public Exposure Limits [Compliant]</b>
<b>Total Exposure Quotient:</b> (Assessment of cumulative emissions from multiple transmitters)	<b>Below ICNIRP Public Exposure Limits [Compliant]</b>

## 2. Surveyors

<b>Survey conducted for ComReg by:</b>	Compliance Engineering Ireland Ltd.	
----------------------------------------	-------------------------------------	---------------------------------------------------------------------------------------

<b>Survey Engineer(s):</b>	<b>Report Writer:</b>	<b>Report Reviewer:</b>
Michael Reilly, BEng	Michael Reilly, BEng	John McAuley, MEng

### 3. Survey Location Details

#### Designated Transmitter Site Photo




#### Survey Weather

**Sky:** Light Cloud

**Temperature:**  
5 °C

**Relative Humidity:**  
45 %

#### Map of Designated Transmitter Site and Measurement Location

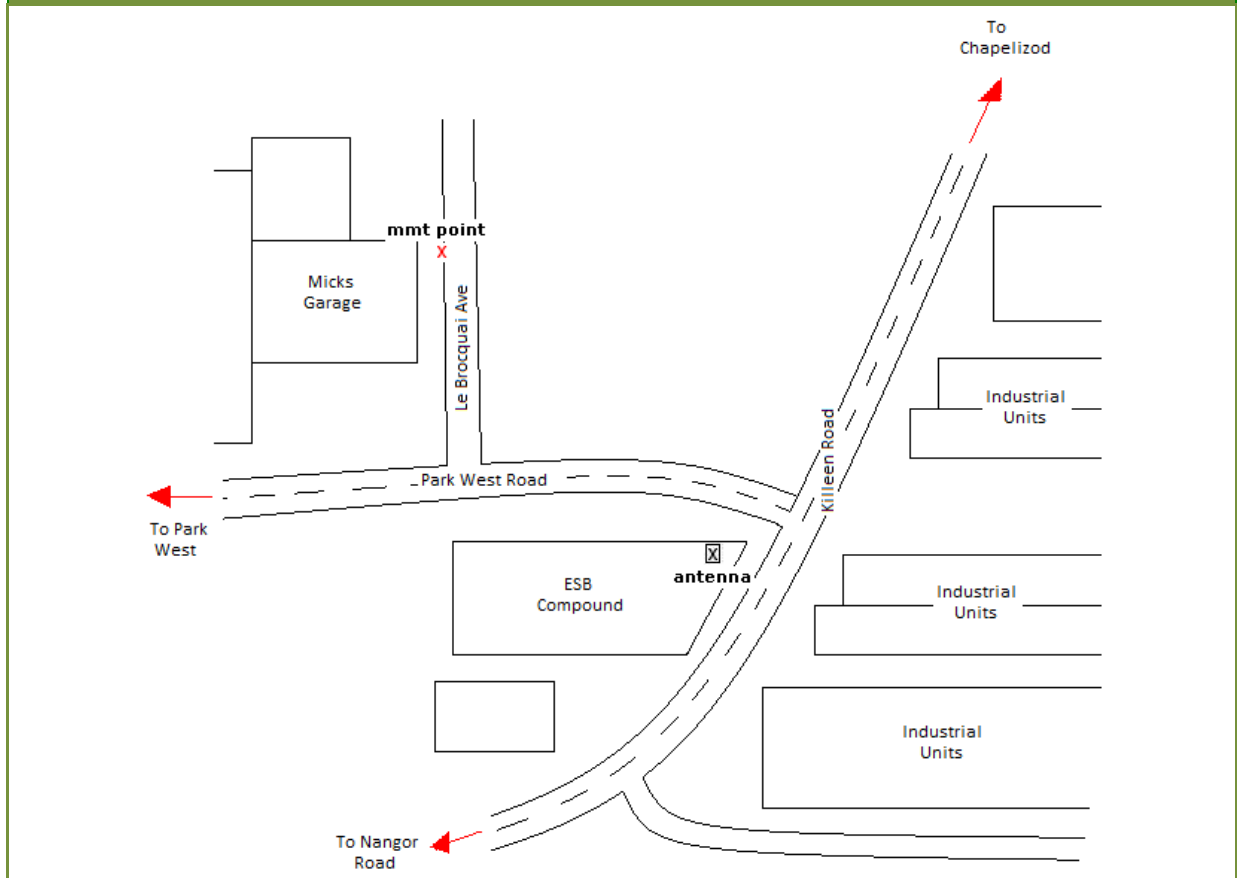

## 4. Introductory Note

### Purpose of Survey

The survey of the designated transmitter site (“**Designated Site**”) was commissioned by ComReg as part of its Programme of Measurement of Non-Ionising Radiation. The purpose of the survey was to assess whether NIR (occurring within the radio frequency part of the electromagnetic spectrum) from the Designated Site complied with the limits for general public exposure specified in the guidelines published by ICNIRP (“**ICNIRP Public Exposure Limits**”).<sup>1</sup>

Compliance with the ICNIRP Public Exposure Limits is a condition of a General Authorisation for the provision of an electronic communications network/service (e.g. mobile phone and broadcasting networks) as well as of various Wireless Telegraphy licences (in respect of transmitting stations) issued by ComReg.

### Survey Methodology

Measurements of the NIR from the Designated Site were conducted in accordance with the methodology outlined in ComReg Document 08/51R3<sup>2</sup>. This methodology incorporates many of the measurement methods and procedures outlined in:

- European Electronic Communications Committee (**ECC**) Recommendation (02)04<sup>3</sup>;
- European Committee for Electrotechnical Standardisation (**CENELEC**) measurement standard EN 50492:2008<sup>4</sup>, and
- measurement techniques developed by the Institut für Mobil- und Satellitenfunktechnik (**IMST**) and the EM-Institut on behalf of the German Federal Office for Radiation Protection.<sup>5</sup>

### Note re this Report Version

If you have downloaded this report from [www.siteviewer.ie](http://www.siteviewer.ie) or from [www.comreg.ie](http://www.comreg.ie), you are reading an abbreviated version. In addition to sections 1 to 8, the full extended technical version of this report contains a comprehensive technical record of the measurements and any calculations performed, a list of equipment used, as well as a technical appendix. A copy of the extended report is available on request from ComReg.

---

<sup>1</sup> Current ICNIRP guidelines:

- “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”, ICNIRP, published in ‘Health Physics’, April 1998, Volume 74, No. 4: <http://www.icnirp.org/documents/emfgdl.pdf>
- “Guidelines for Limiting Exposure to Time-Varying Electric and Magnetic Fields (1 Hz to 100 kHz)”, ICNIRP, published in ‘Health Physics’, December 2010, Volume 99, No. 6: <http://www.icnirp.org/documents/LFgdl.pdf>

<sup>2</sup> <https://www.comreg.ie/publication-download/programme-of-measurement-of-non-ionising-radiation-emissions-methodology-for-the-conduct-of-surveys-to-measure-non-ionising-electromagnetic-radiation-from-transmitter-sites-2>

<sup>3</sup> ECC RECOMMENDATION (02)04, “Measuring Non-Ionising Electromagnetic Radiation (9 kHz – 300 GHz)”, ECC, (revised Bratislava 2003, Helsinki 2007): <http://www.erdocdb.dk/Docs/doc98/official/pdf/REC0204.PDF>

<sup>4</sup> EN 50492:2008, “Basic standard for the in-situ measurement of electromagnetic field strength related to human exposure in the vicinity of base stations”, CENELEC, November 2008: <http://www.cenelec.eu>

<sup>5</sup> See: <http://www.bfs.de> .

## 5. Survey Overview

### Survey Stages

In accordance with the methodology outlined in ComReg Document 08/51R3, this survey was conducted in three stages:

- 1 Initial Site Survey
- 2 Full Survey – Broadband Measurements
- 3 Full Survey – Frequency Selective Measurements

An outline of each stage, along with the results and conclusions of the measurements, are presented in the following three sections.

### Measurement of Electromagnetic Fields

Electromagnetic fields (**EMFs**) can be sub-divided into two components:

- Electric field (**E-field**) (measured in volts per metre or “V/m”); and
- Magnetic field (**H-field**) (measured in amperes per metre or “A/m”).

The E-field and the H-field are mathematically interdependent<sup>6</sup> in the **radiating near-field**<sup>7</sup> and the **far-field**<sup>8</sup>, which is located beyond a distance of at least the wavelength of the radiated EMF. The measurement locations for most transmitter installations lie well within the far-field, as the wavelengths of the transmitted signals are relatively short, and the antennas are typically located many metres from any public area.

The following table identifies wavelengths for commonly transmitted signals:

Transmitter Type	Frequency	Wavelength
PMR Low Band VHF	68 MHz	4.41 m
UHF TV	470 MHz	0.64 m
GSM 900 (mobile phone base)	925 MHz	0.32 m
GSM 1800 (mobile phone base)	1805 MHz	0.17 m
UMTS (mobile phone base)	2110 MHz	0.14 m

In the radiating near-field and far-field, only one component needs to be measured, as the other component can be readily derived from it. Normally, it is the E-field which is measured.

In the case of transmitters of very long wavelength signals, such as long wave radio (1.19 km wavelength), the H-field and E-field must be measured separately as the point of measurement will most likely lie within the **reactive near-field**<sup>9</sup> region. In this region, located within a distance of at least the wavelength of the radiated EMF, the relationship between E and H becomes very complex and there is no direct correlation between both components of the EMF.

<sup>6</sup>  $E \approx H \times Z_0$  (Radiating Near Field) and  $E = H \times Z_0$  (Far Field), where  $Z_0$  (characteristic impedance of free space)  $\approx 377 \Omega$

<sup>7</sup> Beyond a distance of  $\max(\lambda, D, D^2/4\lambda)$ , where  $\lambda$  is the wavelength and  $D$  is the antenna's largest dimension




<sup>8</sup> Beyond a distance of  $\max(5\lambda, 5D, 0.6D^2/\lambda)$

<sup>9</sup> Within a distance of  $\max(\lambda, D, D^2/4\lambda)$

## Measurement Equipment

The measurement of EMFs is a complex process which involves the use of various meters, spectrum analysers, probes and antennas, appropriate to the frequencies of the emissions being measured.

The table below shows examples of equipment typically used to measure EMFs in NIR surveys.

Initial Site Survey and Broadband Measurements	Frequency Selective Measurements	
 <p>Used to measure the overall electric or magnetic field present over a range of frequencies (e.g. 100kHz to 3GHz).</p>	<p><b>SPECTRUM ANALYSER WITH TRIPOD MOUNTED ANTENNA CONNECTED</b></p> 	<p><b>PORTABLE SPECTRUM ANALYSER WITH ANTENNA DIRECTLY CONNECTED</b></p>  <p>Spectrum analysers are used to measure individual emissions at specific frequencies. Individual emissions contribute to the overall EMF. Examples of individual emissions are a TV signal, and a mobile phone signal for a particular mobile operator. There may be a number of emissions from different transmitters contributing to the overall EMF at a particular location.</p>

## 6. Initial Site Survey

An initial survey was carried out in the area around the Designated Site in order to determine the point of maximum NIR. This is the location at which the overall E-field strength level measured was somewhat higher than that measured in other areas around the site and represents the highest level of exposure to which a member of the general public might be subjected in the vicinity of the transmitter.

For this initial survey a calibrated field strength meter fitted with a **3 GHz isotropic probe** was used. The meter and probe were used to measure the sum of all electrical fields present at **all frequencies from 100 kHz up to 3 GHz**.

Once the point of maximum NIR was determined, broadband and frequency-selective measurements were conducted at that location (see following two sections). For the duration of all measurements, the various instruments, antennas and probes used were mounted on non-metallic supports.

## 7. Full Survey – Broadband Measurements


The purpose of these measurements was to get an overview of the intensity of the EMF present at the point of maximum NIR near the Designated Site.

There, the field strength meter (which was mounted on a tripod and fitted with a **3GHz isotropic probe**), was set to record, over a six-minute period, simultaneous measurements of the sum of all received signals within the frequency range of the probe. This measurement was then repeated using a **40 GHz isotropic probe**.

The broadband measurement results presented below show the levels in volts per metre (V/m) recorded during the six-minute period. The average and maximum levels can be compared to the lowest maximum ICNIRP Public Exposure Limits which is 28 V/m.

If a broadband measurement is higher than 28 V/m, it does not necessarily follow that the ICNIRP Public Exposure Limits have been exceeded because the limits are frequency dependent. For example, if the emissions are in the 2100 MHz (mobile phone) frequency band, then the limit which applies is higher at 61 V/m. A more detailed investigation involving frequency selective measurement is necessary to assess compliance with the ICNIRP Public Exposure Limits (see following section).


Electric field strengths recorded over 6 minute period using 3 GHz probe at point of maximum NIR

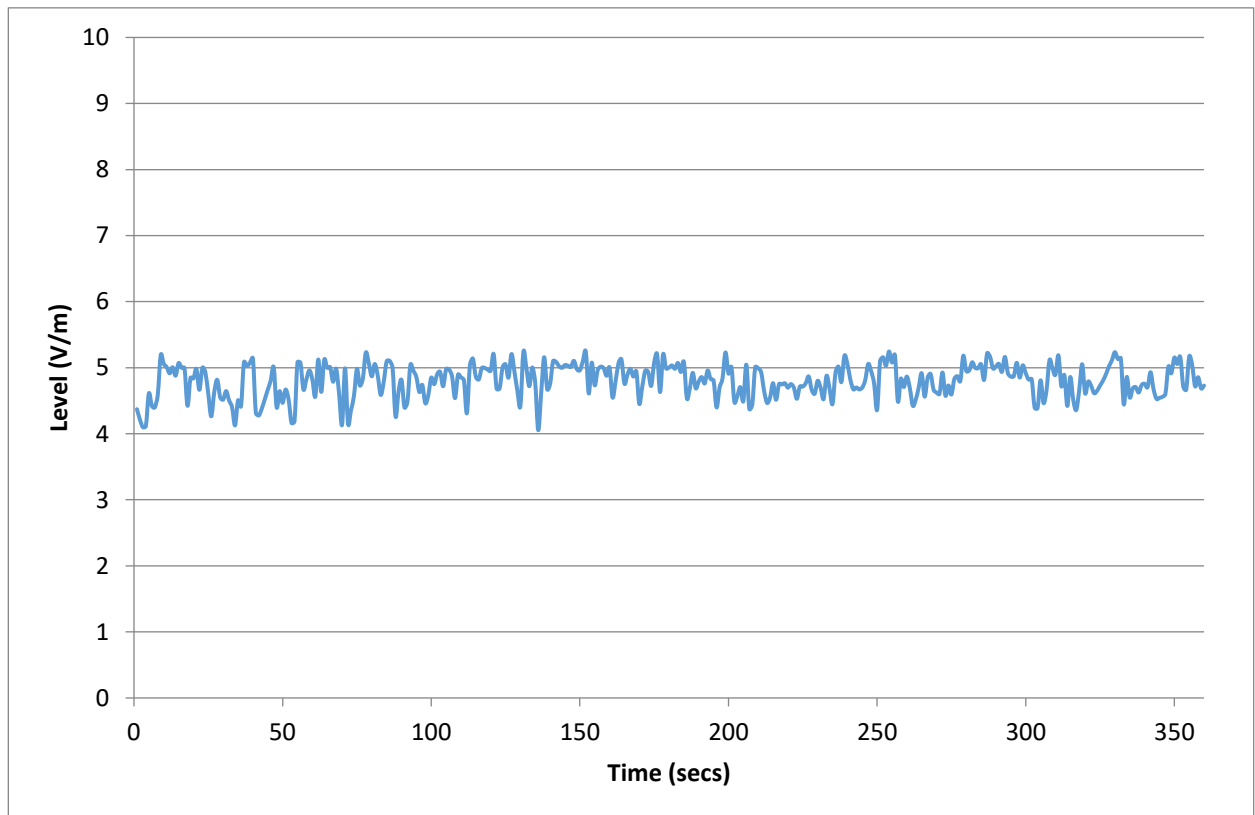

Acquisition Mode: 1 Sec. Sampling

Mean Measurement V/m:	4.80 V/m	Peak Measurement V/m:	5.25 V/m
Date:	17/12/2019	Start Time:	12:43
Meter:	NBM-550	Probe:	EF3091
Frequency Range:	100 kHz – 3 GHz		

Electric field strengths recorded over 6 min period using 60 GHz probe at point of maximum NIR

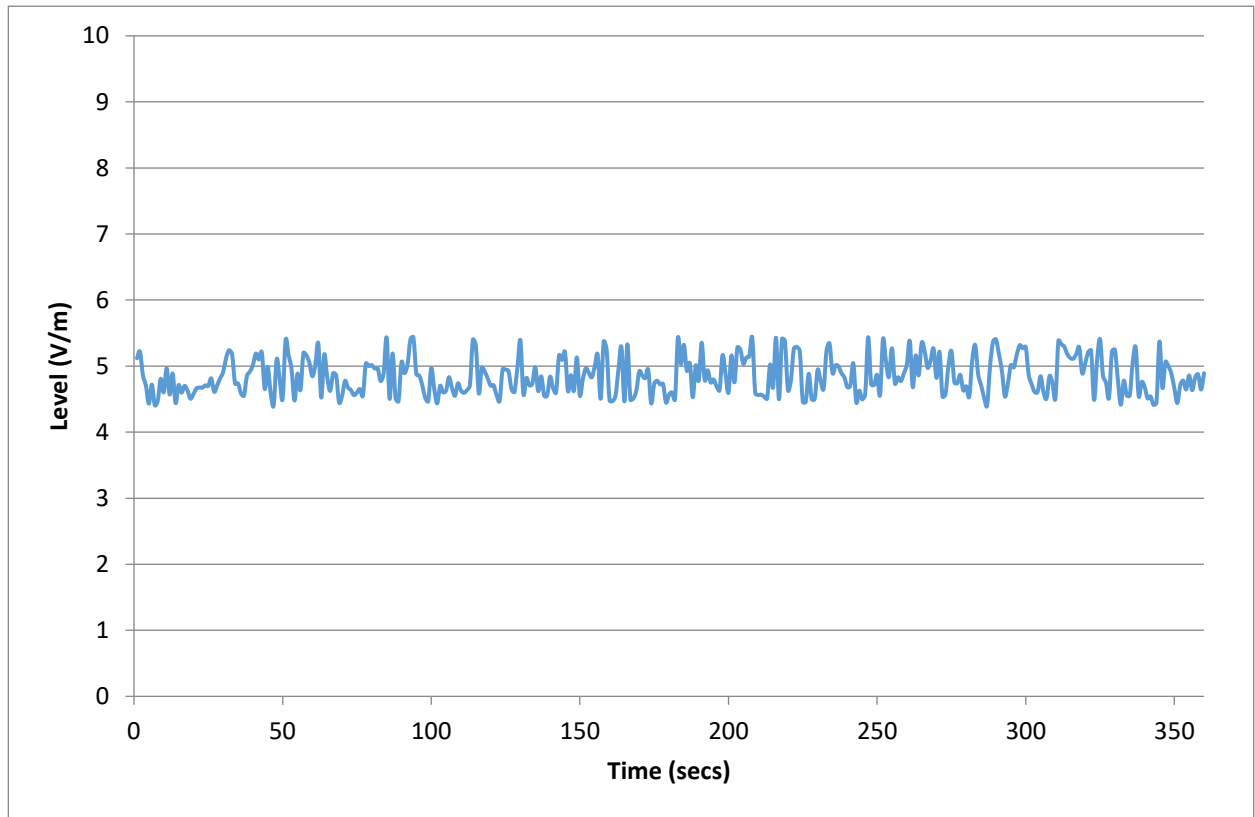

Acquisition Mode: 1 Sec. Sampling

<b>Mean Measurement V/m:</b>	4.85 V/m	<b>Peak Measurement V/m:</b>	5.44 V/m
<b>Date:</b>	17/12/2019	<b>Start Time:</b>	12:51
<b>Meter:</b>	NBM-550	<b>Probe:</b>	EF 4091
<b>Frequency Range:</b>	27 MHz – 40 GHz		

Conclusion of the Broadband Measurements

The mean and peak measurements were below the lowest ICNIRP guideline limit of 28 V/m.



## 8. Full Survey – Frequency Selective Measurements

### Basic Measurement Procedure

A more detailed survey was performed at the point of maximum NIR near the Designated Site to identify the individual transmit frequencies and field strengths of each type of emission (e.g. mobile phone (GSM, UMTS and LTE), wireless broadband, TV, radio signals etc.) and their contribution to the total EMF.

The measurements were performed using spectrum analyser equipment and a range of antennas to match the frequency bands in which emissions were measured.

### Table of Measurement Results

A list of the measurements made is presented in the table on the following page. For each emission measured, the table shows:

- **Emission Type** (e.g. GSM or UMTS mobile phone, TV etc);
- Transmission **frequency** of the signal;
- **Measured Level** (in volts per metre (V/m));
- **Adjusted Level** (if applicable to account for the characteristics of certain signal types or to compensate for limitations of measurement equipment or to estimate emissions for maximum call or data traffic); and
- **ICNIRP Public Limit**.

Further details of Adjusted Level/s and ICNIRP Public Exposure Limits are in the explanatory notes which follow the table of measurement results.

### Assessment of ICNIRP Compliance of Individual Emissions

The levels for each measure (as adjusted where necessary) are compared to the relevant ICNIRP Public Exposure Limit which applies for the particular frequency of the emission. It should be again noted that the ICNIRP Public Exposure Limit varies according to frequency - the limits for the different measurements presented in the tables will vary as the measurements have been performed at different frequencies.

### Assessment of ICNIRP Compliance of Cumulative Emissions

The levels measured for individual emissions are used to calculate **Total Exposure Quotients** to assess the cumulative effect of individual emissions from multiple transmitters. Further details of these quotients are in the explanatory notes which follow the table of measurement results.

The calculated values of the Total Exposure Quotients must be  $\leq 1$  in order for the aggregate of multiple measurements to satisfy the criteria of the ICNIRP Public Exposure Limit.

**Table of Frequency Selective Measurement Results**

<b>Emission Type</b>	<b>Frequency (MHz)</b>	<b>Measured Level (V/m)</b>	<b>Adjusted Level (V/m)</b>	<b>ICNIRP Exposure Limit (V/m)</b>	<b>Times below Limit [adjusted Values]</b>
FM Radio	91.270	0.02809	0.02809	28.0	996.796
FM Radio	100.300	0.02743	0.02743	28.0	1020.780
FM Radio	100.890	0.02532	0.02532	28.0	1105.845
FM Radio	103.790	0.02086	0.02086	28.0	1342.282
FM Radio	104.410	0.02082	0.02082	28.0	1344.861
FM Radio	102.190	0.02036	0.02036	28.0	1375.246
FM Radio	98.090	0.02023	0.02023	28.0	1384.083
FM Radio	93.480	0.01880	0.01880	28.0	1489.362
FM Radio	105.990	0.01729	0.01729	28.0	1619.433
FM Radio	89.100	0.01662	0.01662	28.0	1684.717
FM Radio	98.680	0.01620	0.01620	28.0	1728.395
FM Radio	96.680	0.01617	0.01617	28.0	1731.602
FM Radio	94.880	0.01609	0.01609	28.0	1740.211
FM Radio	105.180	0.01478	0.01478	28.0	1894.452
FM Radio	90.670	0.01313	0.01313	28.0	2132.521
FM Radio	92.900	0.01227	0.01227	28.0	2281.989
FM Radio	106.800	0.01218	0.01218	28.0	2298.851
FM Radio	88.480	0.01153	0.01153	28.0	2428.448
FM Radio	89.900	0.00715	0.00715	28.0	3918.276
FM Radio	103.180	0.00565	0.00565	28.0	4958.385
T-DAB	227.760	0.01294	0.01294	28.0	2163.833
TETRA	REDACTED	0.01001	0.01734	28.0	1614.966
TETRA	REDACTED	0.00912	0.01580	28.0	1772.567
TETRA	REDACTED	0.00911	0.01578	28.0	1774.707
TETRA	REDACTED	0.00460	0.00797	28.0	3511.253
TETRA	REDACTED	0.00365	0.00632	28.0	4431.417
TETRA	REDACTED	0.00344	0.00596	28.0	4696.632
TETRA	REDACTED	0.00326	0.00461	28.0	6069.586
TETRA	REDACTED	0.00264	0.00457	28.0	6130.378
TETRA	REDACTED	0.00236	0.00409	28.0	6852.822
TETRA	REDACTED	0.00223	0.00387	28.0	7236.261
TETRA	REDACTED	0.00211	0.00365	28.0	7676.072
TETRA	REDACTED	0.00185	0.00321	28.0	8724.127
TETRA	REDACTED	0.00173	0.00299	28.0	9355.213
TETRA	REDACTED	0.00145	0.00251	28.0	11148.833
TETRA	REDACTED	0.00133	0.00231	28.0	12136.492
TETRA	REDACTED	0.00131	0.00226	28.0	12368.636
TETRA	REDACTED	0.00127	0.00220	28.0	12728.982
TETRA	REDACTED	0.00120	0.00207	28.0	13527.872
TETRA	REDACTED	0.00119	0.00205	28.0	13630.529
TETRA	REDACTED	0.00118	0.00205	28.0	13688.237
TETRA	REDACTED	0.00113	0.00195	28.0	14356.845

<b>TETRA</b>	<b>REDACTED</b>	0.00108	0.00187	28.0	14968.340
<b>PMR</b>	<b>REDACTED</b>	<b>REDACTED</b>	<b>REDACTED</b>	<b>REDACTED</b>	7823.229
<b>PMR</b>	<b>REDACTED</b>	<b>REDACTED</b>	<b>REDACTED</b>	<b>REDACTED</b>	12162.429
<b>PMR</b>	<b>REDACTED</b>	<b>REDACTED</b>	<b>REDACTED</b>	<b>REDACTED</b>	16387.567
<b>DVB-T</b>	546.700	0.07194	0.08489	32.1	378.726
<b>DVB-T</b>	577.070	0.07088	0.08364	33.0	394.922
<b>DVB-T</b>	572.500	0.06931	0.08179	32.9	402.265
<b>DVB-T</b>	583.210	0.06363	0.07508	33.2	442.253
<b>DVB-T</b>	770.620	0.03777	0.04457	38.2	856.434
<b>DVB-T</b>	736.020	0.03564	0.04206	37.3	887.009
<b>LTE</b>	816.000	0.96250	2.75275	39.3	14.269
<b>LTE</b>	806.000	0.98950	2.82997	39.0	13.794
<b>LTE</b>	796.000	0.74020	2.11697	38.8	18.325
<b>GSM</b>	957.599	1.47300	2.94600	42.5	14.443
<b>GSM</b>	947.875	1.02600	2.05200	42.3	20.630
<b>GSM</b>	926.500	0.86580	1.73160	41.9	24.170
<b>UMTS FDD</b>	932.500	1.10800	4.13763	42.0	10.148
<b>UMTS FDD</b>	953.500	1.03200	3.85382	42.5	11.017
<b>UMTS FDD</b>	937.000	0.53250	1.98853	42.1	21.166
<b>UMTS FDD</b>	943.000	0.41940	1.56617	42.2	26.960
<b>GSM</b>	1843.630	0.01282	0.02564	59.0	2302.616
<b>LTE</b>	1815.000	0.01050	0.03678	58.6	1592.506
<b>LTE</b>	1830.000	0.36100	1.46032	58.8	40.279
<b>LTE</b>	1855.000	0.28580	1.15612	59.2	51.224
<b>LTE</b>	1875.000	0.58930	2.06446	59.5	28.840
<b>UMTS FDD</b>	2152.500	0.57220	1.80947	61.0	33.712
<b>UMTS FDD</b>	2132.500	0.47320	1.49640	61.0	40.764
<b>UMTS FDD</b>	2147.500	0.45720	1.44580	61.0	42.191
<b>UMTS FDD</b>	2137.500	0.43910	1.38857	61.0	43.930
<b>UMTS FDD</b>	2127.500	0.29360	0.92845	61.0	65.701
<b>UMTS FDD</b>	2122.500	0.22360	0.70709	61.0	86.269
<b>UMTS FDD</b>	2112.500	0.13370	0.42280	61.0	144.276
<b>UMTS FDD</b>	2117.500	0.13360	0.42248	61.0	144.384
<b>UMTS FDD</b>	2157.500	0.11600	0.36683	61.0	166.291
<b>BWA</b>	3442.810	0.00186	0.00973	61.0	6267.181
<b>LTE</b>	3491.714	0.00674	0.04981	61.0	1224.639
<b>5G NR</b>	3652.667	0.15801	1.34783	61.0	45.258
<b>WiFi</b>	5578.071	0.00572	0.03449	61.0	1768.503
<b>BWA/WIMAX</b>	5762.381	0.00493	0.01490	61.0	4094.139
<b>BWA/WIMAX</b>	5832.143	0.00143	0.00609	61.0	10011.759

**Total Exposure Quotients [calculated from Adjusted Levels]**

Quotient	Frequency Range	Calculated Quotient Value	Limit
Electrical Stimulation Effects	1 Hz to 10 MHz	n/a	1
Thermal Effects	100 kHz and above	0.049334	1

**Overall Conclusions of the Survey**

<b>Frequency Selective Measurements:</b> (Individual emissions measured at specific frequencies)	<b>Below ICNIRP Public Exposure Limits (Compliant)</b>
<b>Total Exposure Quotient:</b> (Assessment of cumulative emissions from multiple transmitters)	<b>Below ICNIRP Public Exposure Limits (Compliant)</b>


## Adjusted Levels

For some emissions, an adjusted level may be required to be derived from the measured level:

- (1) **to compensate for the limited measurement resolution of the spectrum analyser.** For example, a measurement of a DVB-T (digital TV) signal performed with a resolution of 5 MHz needs to be adjusted upwards using a correction factor to account for the energy present within the full 7.61 MHz bandwidth of the signal; and/or
- (2) **to extrapolate to an estimate of the level under maximum traffic or duty cycle from the transmitter.** For example, the base stations of mobile phone networks produce emissions which vary according to the changing volume of calls or data traffic over the course of the day.

## ICNIRP Public Exposure Limits

These are set out in the ICNIRP Guidelines as reference levels for the practical assessment of exposure to electric and magnetic fields, as experienced by the general public (excluding occupational exposure and exposure during medical procedures). The limits vary according to the frequency of the emissions as illustrated in the adjacent diagram. For example, the limits for Wi-Fi in the 2400-2483.5 MHz frequency band are higher than those for FM Radio transmissions in the much lower 87.5-108 MHz frequency band.

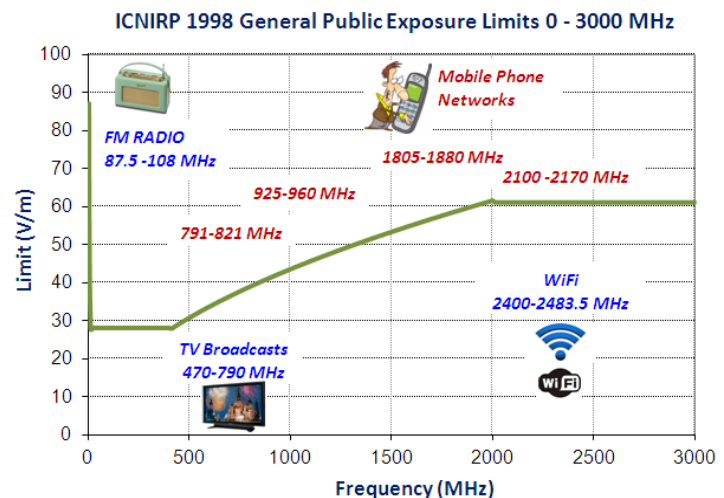

## Total Exposure Quotients

The Total Exposure Quotients (which must be  $\leq 1$ ) are calculated in accordance with mathematical formulas specified in the ICNIRP Guidelines to assess the cumulative effect of emissions from multiple transmitters. The quotients in this report are calculated from the Adjusted Levels rather than from the Measured Levels to account for total potential public exposure under maximum traffic conditions.

The two quotients are as follows:

### (1) Quotient for Electrical Stimulation Effects (1 Hz to 10 MHz)

This quotient is calculated only in a small number of cases where strong emissions in the frequency range between 1 Hz and 10 MHz are present at the survey location (e.g. near a long wave radio transmitter site). This essentially involves summing the ratios (measured field strength/applicable limit) for each emission.

### (2) Quotient for Thermal Effects (100 kHz and above)

The measurements of any emissions above 100 kHz are used to calculate a quotient to assess any thermal (heat) effects. This essentially involves summing the squares of the ratios (measured field strength/applicable limit) for each emission.