

## 1. Survey Summary

<b>Address of Transmitter Site Surveyed:</b>	Aspect Hotel Parkwest, New Nangor Road, Parkwest, Dublin 12.
<b>Survey Date:</b>	02/12/2020
<b>Emission Measured:</b>	GSM, UMTS, LTE, NR

<b>Measurement Location:</b> (at point of maximum non-ionising radiation near site)	On public footpath outside apartment building, close to transmitter location.
--	---

<b>Measurement Location Coordinates:</b>	<b>LAT</b>	<i>deg</i>	<i>min</i>	<i>sec</i>	<b>LONG</b>	<i>deg</i>	<i>min</i>	<i>sec</i>
	N	53	20	0.5	W	6	22	37.3

### Purpose and Conduct of Survey:

The purpose of this survey was to assess compliance with the limits for general public exposure to non-ionising radiation (**NIR**) set by the International Commission on Non-Ionising Radiation Protection (**ICNIRP**) ("**ICNIRP Public Exposure Limits**").

Compliance with the ICNIRP Public Exposure Limits is a condition of a General Authorisation for an electronic communications network/service as well as of various Wireless Telegraphy licences issued by the Commission for Communications Regulation (**ComReg**).

The survey was conducted by:

- measuring the overall electromagnetic field (**EMF**) present at the point of highest exposure in a public area associated with the designated transmitter site;
- identifying the frequency of the principal emissions contributing to the EMF; and
- measuring the intensity (or level) of same.

### Overall Conclusions of the Survey

<b>Frequency Selective Measurements:</b> (Individual emissions measured at specific frequencies)	<b>Below ICNIRP Public Exposure Limits [Compliant]</b>
<b>Total Exposure Quotient:</b> (Assessment of cumulative emissions from multiple transmitters)	<b>Below ICNIRP Public Exposure Limits [Compliant]</b>

## 2. Surveyors

<b>Survey conducted for ComReg by:</b>	Compliance Engineering Ireland Ltd.	
--	-------------------------------------	---

<b>Survey Engineer(s):</b>	<b>Report Writer:</b>	<b>Report Reviewer:</b>
Michael Reilly, BEng	Michael Reilly, BEng	John McAuley, MEng

### 3. Survey Location Details

#### Designated Transmitter Site Photo




#### Survey Weather

**Sky:** Clear

**Temperature:**  
6° C

**Relative Humidity:**  
45 %

#### Map of Designated Transmitter Site and Measurement Location

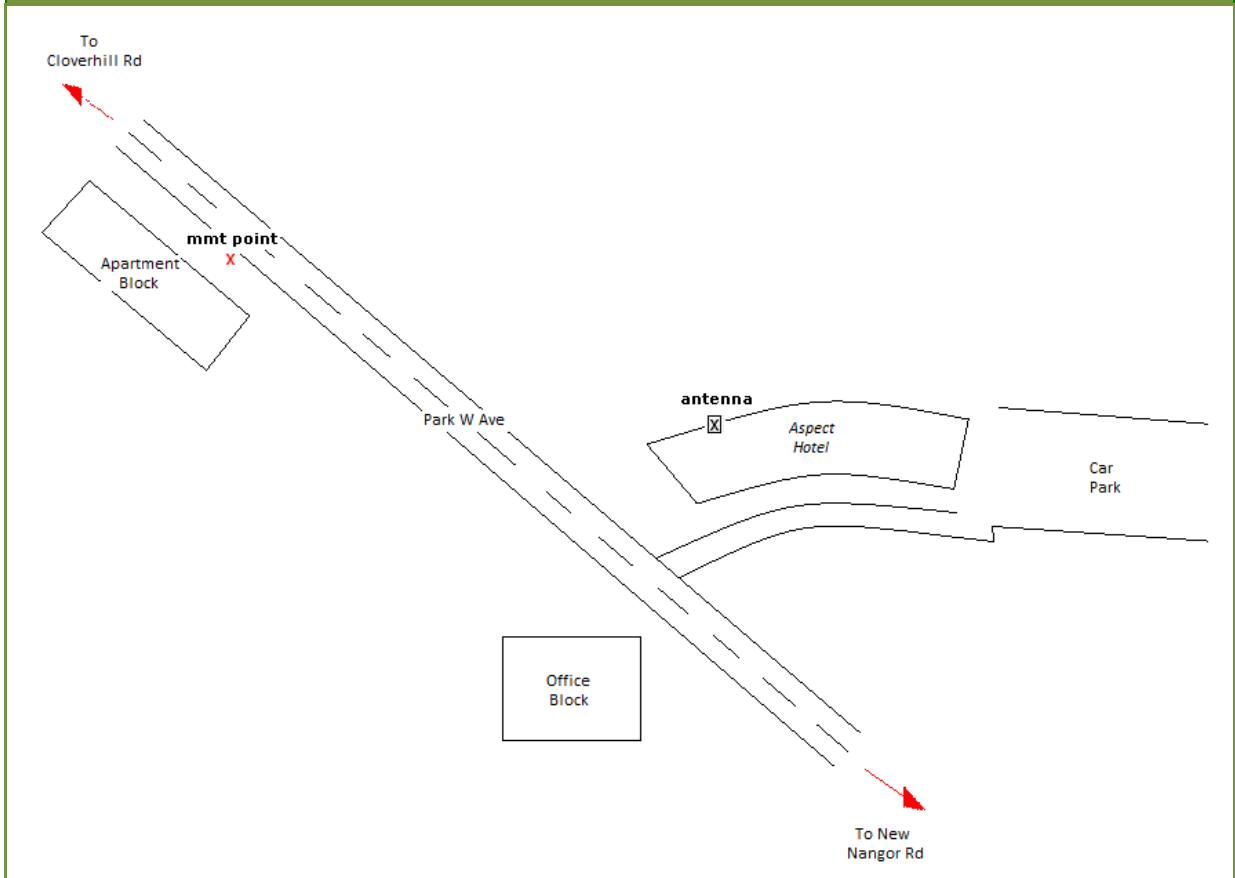

## 4. Introductory Note

### Purpose of Survey

The survey of the designated transmitter site (“**Designated Site**”) was commissioned by ComReg as part of its Programme of Measurement of Non-Ionising Radiation. The purpose of the survey was to assess whether NIR (occurring within the radio frequency part of the electromagnetic spectrum) from the Designated Site complied with the limits for general public exposure specified in the guidelines published by ICNIRP (“**ICNIRP Public Exposure Limits**”).<sup>1</sup> Compliance with the ICNIRP Public Exposure Limits is a condition of a General Authorisation for the provision of an electronic communications network/service (e.g. mobile phone and broadcasting networks) as well as of various Wireless Telegraphy licences (in respect of transmitting stations) issued by ComReg.

### Survey Methodology

Measurements of the NIR from the Designated Site were conducted in accordance with the methodology outlined in ComReg Document 08/51R4<sup>2</sup>. Once standardised, these methodologies are to be incorporated. Methodologies used in conducting this site reports are listed below;

- European Electronic Communications Committee (**ECC**) Recommendation (02)04<sup>3</sup>;
- European Committee for Electrotechnical Standardisation (**CENELEC**) measurement standard EN 50492:2008<sup>4</sup>, and
- Measurement techniques developed by the Institut für Mobil- und Satellitenfunktechnik (**IMST**) and the EM-Institut on behalf of the German Federal Office for Radiation Protection.<sup>5</sup>

Additional methodologies to be used in conducting this site report are listed below:

- Measurement techniques as published by Dr. Helmut Keller on behalf of Narda Safety Test Solutions.<sup>6</sup>

### Note re this Report Version

If you have downloaded this report from ComReg’s Siteviewer<sup>7</sup> or from [www.comreg.ie](http://www.comreg.ie), you are reading an abbreviated version. The full technical version of this report also contains a comprehensive technical record of the measurements and any calculations performed, a list of equipment used, and a technical appendix. A copy of the full report is available upon request from ComReg.

---

<sup>1</sup> Current ICNIRP guidelines:

- “*Guidelines for Limiting Exposure to Electromagnetic Fields (100 kHz to 300 GHz)*”, ICNIRP, published in ‘Health Physics’, March 2020, Volume 118, No. 5: <https://www.icnirp.org/cms/upload/publications/ICNIRPrfgdl2020.pdf>
- “*Guidelines for Limiting Exposure to Time-Varying Electric and Magnetic Fields (1 Hz to 100 kHz)*”, ICNIRP, published in ‘Health Physics’, December 2010, Volume 99, No. 6: <https://www.icnirp.org/cms/upload/publications/ICNIRPLFgdl.pdf>

<sup>2</sup> <https://www.comreg.ie/publication/programme-of-measurement-of-non-ionising-radiation-methodology-for-the-conduct-of-surveys-to-measure-non-ionising-radiation-from-transmission-sites>

<sup>3</sup> ECC RECOMMENDATION (02)04, “*Measuring Non-Ionising Electromagnetic Radiation (9 kHz – 300 GHz)*”, ECC, (revised Bratislava 2003, Helsinki 2007): <http://www.erodocdb.dk/Docs/doc98/official/pdf/REC0204.PDF>

<sup>4</sup> EN 50492:2008, “*Basic standard for the in-situ measurement of electromagnetic field strength related to human exposure in the vicinity of base stations*”, CENELEC, November 2008: <http://www.cenelec.eu>

<sup>5</sup> See: <http://www.bfs.de> .

<sup>6</sup> “*On the Assessment of Human Exposure to Electromagnetic Fields Transmitted by 5G NR Base Stations*”, published in ‘Health Physics’, November 2019, Volume 117, No.5: [https://journals.lww.com/health-physics/fulltext/2019/11000/on\\_the\\_assessment\\_of\\_human\\_exposure\\_to.7.aspx](https://journals.lww.com/health-physics/fulltext/2019/11000/on_the_assessment_of_human_exposure_to.7.aspx)

<sup>7</sup> <https://siteviewer.comreg.ie/>

## 5. Survey Overview

### Survey Stages

In accordance with the methodology outlined in ComReg Document 08/51R4, this survey was conducted in three stages:

- 1 Initial Site Survey
- 2 Full Survey – Broadband Measurements
- 3 Full Survey – Frequency Selective Measurements

An outline of each stage, along with the results and conclusions of the measurements, are presented in the following three sections.

### Measurement of Electromagnetic Fields

Electromagnetic fields (EMFs) can be sub-divided into two components:

- Electric field (**E-field**) (measured in volts per metre or “V/m”); and
- Magnetic field (**H-field**) (measured in amperes per metre or “A/m”).

The E-field and the H-field are mathematically interdependent<sup>8</sup> in the **radiating near-field**<sup>9</sup> and the **far-field**<sup>10</sup>, which are located before and beyond a distance of at least the wavelength of the radiated EMF respectively. The measurement locations for most transmitter installations lie well within the far-field, as the wavelengths of the transmitted signals are relatively short, and the antennas are typically located many metres from any public area.

The following table gives examples of wavelengths for some commonly transmitted signals:

Transmitter Type	Frequency	Wavelength
PMR Low Band VHF	68 MHz	4.41 m
UHF TV	470 MHz	0.64 m
GSM 900 (2G mobile base station)	925 MHz	0.32 m
LTE 1800 (4G mobile base station)	1805 MHz	0.17 m
UMTS (3G mobile base station)	2110 MHz	0.14 m
5G NR (5G Mobile base station)	3500 MHz	0.09 m

In the radiating near-field and far-field, only one component needs to be measured, as the other component can be readily derived from it. Normally, it is the E-field which is measured.

In the case of transmitters of very long wavelength signals, such as long wave radio (1.19 km wavelength), the H-field and E-field must be measured separately as the point of measurement will most likely lie within the **reactive near-field**<sup>11</sup> region. In this region, located within a distance of at least the wavelength of the radiated EMF, the relationship between E and H becomes very complex and there is no direct correlation between both components of the EMF.

<sup>8</sup>  $E \approx H \times Z_0$  (Radiating Near Field) and  $E = H \times Z_0$  (Far Field), where  $Z_0$  (characteristic impedance of free space)  $\approx 377 \Omega$

<sup>9</sup> Beyond a distance of  $\max(\lambda, D, D^2/4\lambda)$ , where  $\lambda$  is the wavelength and  $D$  is the antenna's largest dimension


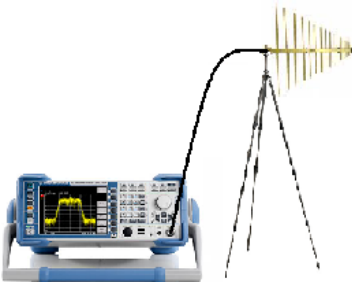

<sup>10</sup> Beyond a distance of  $\max(5\lambda, 5D, 0.6D^2/\lambda)$

<sup>11</sup> Within a distance of  $\max(\lambda, D, D^2/4\lambda)$

## Measurement Equipment

The measurement of EMFs is a complex process which involves the use of various meters, spectrum analysers, probes and antennas, appropriate to the frequencies of the emissions being measured.

The table below shows examples of equipment typically used to measure EMFs in NIR surveys.

Initial Site Survey and Broadband Measurements	Frequency Selective Measurements	
 <p data-bbox="352 719 480 770">ISOTROPIC PROBE</p> <p data-bbox="368 969 496 1043">FIELD STRENGTH METER</p> <p data-bbox="220 1126 579 1301">Used to measure the overall electric or magnetic field present over a range of frequencies (e.g. 100kHz to 3GHz).</p>	<p data-bbox="603 577 970 629">SPECTRUM ANALYSER WITH TRIPOD MOUNTED ANTENNA CONNECTED</p> 	<p data-bbox="1038 577 1374 658">PORTABLE SPECTRUM ANALYSER WITH ANTENNA DIRECTLY CONNECTED</p>  <p data-bbox="603 1126 1441 1335">Spectrum analysers are used to measure individual emissions at specific frequencies. Individual emissions contribute to the overall EMF. Examples of individual emissions are a TV signal, and a mobile phone signal for a particular mobile operator. There may be a number of emissions from different transmitters contributing to the overall EMF at a particular location.</p>

## 6. Initial Site Survey

An initial survey was carried out in the area around the Designated Site in order to determine the point of maximum NIR. This is the location at which the overall E-field strength level measured was somewhat higher than that measured in other areas around the site and represents the highest level of exposure to which a member of the general public might be subjected in the vicinity of the transmitter.

For this initial survey a calibrated field strength meter fitted with a **3 GHz isotropic probe** was used. The meter and probe were used to measure the sum of all electrical fields present at **all frequencies from 100 kHz up to 3 GHz**.

Once the point of maximum NIR was determined, broadband and frequency-selective measurements were conducted at that location (see following two sections). For the duration of those measurements, the various instruments, antennas and probes used were mounted on non-metallic supports.

## 7. Full Survey – Broadband Measurements


The purpose of these measurements was to get an overview of the intensity of the EMF present at the point of maximum NIR near the Designated Site.

There, the field strength meter (which was mounted on a tripod and fitted with **3GHz isotropic probe**), was set to record, over a six-minute period, simultaneous measurements of the sum of all received signals within the frequency range of the probe. This measurement was then repeated using a **40 GHz isotropic probe**.

The broadband measurement results presented below show the levels in volts per metre (V/m) recorded during the six-minute period. The average and maximum levels can be compared to the lowest maximum ICNIRP Public Exposure Limits which is 27.7 V/m.

If a broadband measurement is higher than 27.7 V/m, it does not necessarily follow that the ICNIRP Public Exposure Limits have been exceeded because the limits are frequency dependent. A more detailed investigation involving frequency selective measurement is necessary to assess compliance with the ICNIRP Public Exposure Limits (see following section).


Electric field strengths recorded over 6 minute period using 3 GHz probe at point of maximum NIR

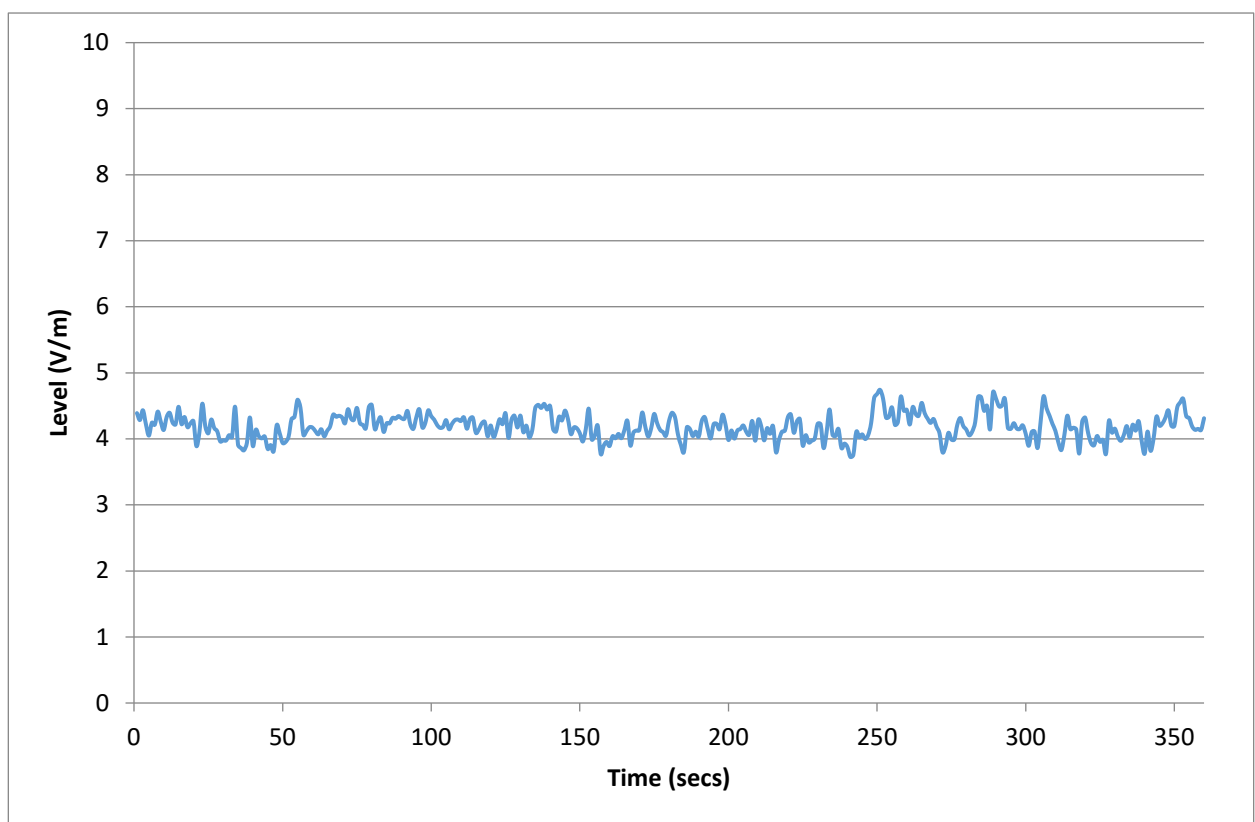

Acquisition Mode: 1 Sec. Sampling

<b>Mean Measurement V/m:</b>	4.19 V/m	<b>Peak Measurement V/m:</b>	4.74 V/m
<b>Date:</b>	02/12/2020	<b>Start Time:</b>	10:14
<b>Meter:</b>	NBM-550	<b>Probe:</b>	EF3091
<b>Frequency Range:</b>	100 kHz – 3 GHz		

Electric field strengths recorded over 6 min period using 40 GHz probe at point of maximum NIR

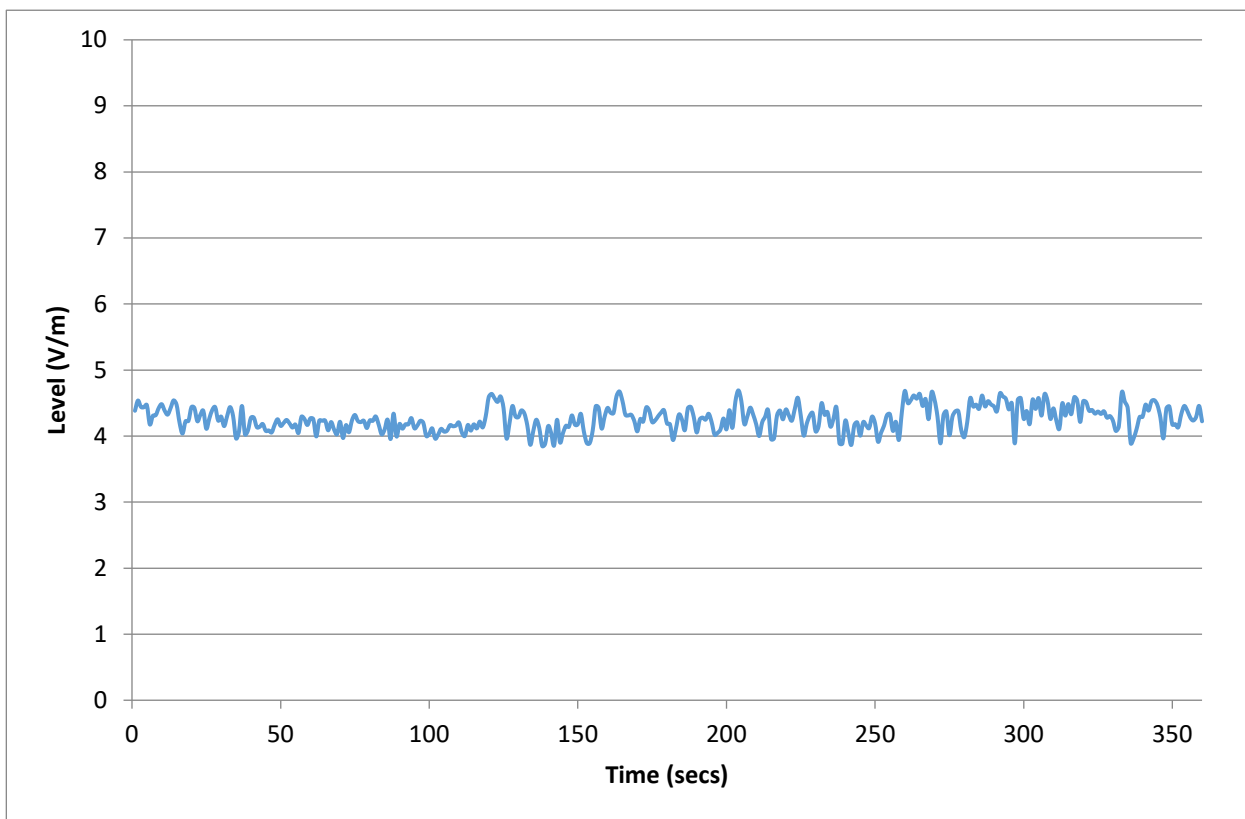

Acquisition Mode: 1 Sec. Sampling

<b>Mean Measurement V/m:</b>	4.26 V/m	<b>Peak Measurement V/m:</b>	4.69 V/m
<b>Date:</b>	02/12/2020	<b>Start Time:</b>	10:20
<b>Meter:</b>	NBM-550	<b>Probe:</b>	EF 4091
<b>Frequency Range:</b>	27 MHz – 40 GHz		

Conclusion of the Broadband Measurements

The mean and peak measurements were below the lowest ICNIRP guideline limit of 27.7 V/m.



## 8. Full Survey – Frequency Selective Measurements

### Basic Measurement Procedure

A more detailed survey was performed at the point of maximum NIR near the Designated Site to identify the individual transmit frequencies and field strengths of each type of emission - e.g. mobile (GSM, UMTS, LTE and 5G NR), wireless broadband (BWA), television (DVB-T), FM radio - and their contribution to the total EMF.

The measurements were performed using spectrum analyser equipment and a range of antennas to match the frequency bands in which emissions were measured.

### Table of Measurement Results

A list of the measurements made is presented in the table on the following page. For each emission measured, the table shows:

- **Emission Type** (e.g. GSM, UMTS, LTE, 5G NR, DVB-T etc);
- Transmission **frequency** of the signal;
- **Measured Level** (in volts per metre (V/m));
- **Adjusted Level** (if applicable to account for the characteristics of certain signal types or to compensate for limitations of measurement equipment or to estimate emissions for maximum call or data traffic); and
- **ICNIRP Public Limit**.

Further details of Adjusted Level/s and ICNIRP Public Exposure Limits are in the explanatory notes which follow the table of measurement results.

### Assessment of ICNIRP Compliance of Individual Emissions

The levels for each measured emission (as adjusted where necessary) are compared to the relevant ICNIRP Public Exposure Limit which applies for the particular frequency of the emission. It should be again noted that the ICNIRP Public Exposure Limit varies according to frequency - the limits for the different measurements presented in the tables will vary as the measurements have been performed at different frequencies.

### Assessment of ICNIRP Compliance of Cumulative Emissions

The levels measured for individual emissions are used to calculate **Total Exposure Quotients** to assess the cumulative effect of individual emissions from multiple transmitters. Further details of these quotients are in the explanatory notes which follow the table of measurement results.

The calculated values of the Total Exposure Quotients must be  $\leq 1$  in order for the aggregate of multiple measurements to satisfy the criteria of the ICNIRP Public Exposure Limit.

Table of Frequency Selective Measurement Results

Emission Type	Frequency (MHz)	Measured Level (V/m)	Adjusted Level (V/m)	ICNIRP Exposure Limit (V/m)	Times below Limit [adjusted Values]
FM Radio	100.290	0.03556	0.03556	27.7	778.965
FM Radio	102.170	0.03023	0.03023	27.7	916.308
FM Radio	98.100	0.02896	0.02896	27.7	956.492
FM Radio	94.870	0.02371	0.02371	27.7	1168.283
FM Radio	104.400	0.02349	0.02349	27.7	1179.225
FM Radio	103.790	0.02281	0.02281	27.7	1214.380
FM Radio	105.990	0.02250	0.02250	27.7	1231.111
FM Radio	105.180	0.01985	0.01985	27.7	1395.466
FM Radio	106.780	0.01792	0.01792	27.7	1545.759
FM Radio	90.680	0.01208	0.01208	27.7	2293.046
FM Radio	88.500	0.01105	0.01105	27.7	2506.787
FM Radio	89.100	0.00951	0.00951	27.7	2912.111
FM Radio	92.910	0.00889	0.00889	27.7	3117.263
FM Radio	96.690	0.00869	0.00869	27.7	3187.939
FM Radio	89.890	0.00857	0.00857	27.7	3230.697
FM Radio	98.700	0.00794	0.00794	27.7	3490.863
FM Radio	100.840	0.00705	0.00705	27.7	3930.751
FM Radio	93.460	0.00679	0.00679	27.7	4077.127
FM Radio	103.200	0.00652	0.00652	27.7	4245.861
T-DAB	227.820	0.00926	0.00926	27.7	2991.361
TETRA	REDACTED	0.03653	0.06327	27.7	437.794
TETRA	REDACTED	0.03392	0.05875	27.7	471.480
TETRA	REDACTED	0.02836	0.04912	27.7	563.914
TETRA	REDACTED	0.01945	0.03369	27.7	822.242
TETRA	REDACTED	0.01714	0.02969	27.7	933.057
TETRA	REDACTED	0.00421	0.00729	27.7	3797.816
TETRA	REDACTED	0.00414	0.00586	27.7	4727.699
TETRA	REDACTED	0.00406	0.00703	27.7	3939.065
TETRA	REDACTED	0.00229	0.00397	27.7	6974.532
TETRA	REDACTED	0.00189	0.00328	27.7	8443.824
TETRA	REDACTED	0.00181	0.00314	27.7	8835.692
TETRA	REDACTED	0.00174	0.00302	27.7	9175.331
TETRA	REDACTED	0.00167	0.00288	27.7	9605.167
TETRA	REDACTED	0.00161	0.00280	27.7	9908.676
TETRA	REDACTED	0.00160	0.00277	27.7	10001.628
TETRA	REDACTED	0.00155	0.00269	27.7	10297.877
TETRA	REDACTED	0.00154	0.00267	27.7	10357.903
TETRA	REDACTED	0.00142	0.00245	27.7	11294.211
TETRA	REDACTED	0.00137	0.00238	27.7	11656.416
TETRA	REDACTED	0.00137	0.00237	27.7	11699.051
TETRA	REDACTED	0.00135	0.00233	27.7	11872.756
TETRA	REDACTED	0.00132	0.00228	27.7	12161.675

TETRA	REDACTED	0.00129	0.00224	27.7	12368.602
TETRA	REDACTED	0.00128	0.00222	27.7	12503.989
TETRA	REDACTED	0.00123	0.00213	27.7	13012.695
TETRA	REDACTED	0.00119	0.00207	27.7	13405.367
TETRA	REDACTED	0.00119	0.00206	27.7	13450.465
TETRA	REDACTED	0.00114	0.00198	27.7	13979.548
TETRA	REDACTED	0.00114	0.00197	27.7	14053.253
TETRA	REDACTED	0.00112	0.00194	27.7	14279.109
PMR	REDACTED	REDACTED	REDACTED	REDACTED	4601.755
PMR	REDACTED	REDACTED	REDACTED	REDACTED	5550.315
PMR	REDACTED	REDACTED	REDACTED	REDACTED	21035.749
PMR	REDACTED	REDACTED	REDACTED	REDACTED	25385.166
PMR	REDACTED	REDACTED	REDACTED	REDACTED	27776.848
DVB-T	570.670	0.05770	0.06809	32.8	482.433
DVB-T	545.000	0.05593	0.06600	32.1	486.378
DVB-T	587.540	0.01874	0.02211	33.3	1507.196
DVB-T	577.500	0.01714	0.02023	33.0	1633.751
LTE	762.905	0.00490	0.01401	38.0	2710.040
LTE	771.095	0.07720	0.22079	38.2	172.931
LTE	796.000	0.01550	0.04433	38.8	875.108
LTE	806.000	0.92790	2.65379	39.0	14.710
LTE	816.000	0.03930	0.11240	39.3	349.453
GSM	928.419	1.15800	2.31600	41.9	18.090
GSM	956.781	1.07000	2.14000	42.5	19.874
GSM	948.906	0.01026	0.02052	42.4	2064.130
UMTS FDD	937.000	0.81950	3.06028	42.1	13.753
UMTS FDD	943.000	0.39900	1.48999	42.2	28.338
UMTS FDD	932.500	0.22620	0.84470	42.0	49.708
UMTS FDD	953.500	0.09588	0.35805	42.5	118.583
GSM	1842.690	0.00431	0.00861	59.0	6855.288
LTE	1815.000	0.39890	1.39744	58.6	41.919
LTE	1830.000	0.05350	0.21642	58.8	271.791
LTE	1855.000	0.33790	1.36687	59.2	43.326
LTE	1875.000	0.63540	2.22596	59.5	26.748
UMTS FDD	2132.500	0.74770	2.36445	61.0	25.799
UMTS FDD	2127.500	0.55330	1.74970	61.0	34.863
UMTS FDD	2122.500	0.36250	1.14633	61.0	53.213
UMTS FDD	2117.500	0.27680	0.87532	61.0	69.688
UMTS FDD	2112.500	0.20580	0.65080	61.0	93.731
UMTS FDD	2137.500	0.17550	0.55498	61.0	109.913
UMTS FDD	2142.500	0.10400	0.32888	61.0	185.478
UMTS FDD	2147.500	0.04739	0.14986	61.0	407.043
LTE	2162.190	0.03870	0.14280	61.0	427.162
WiFi	2477.480	0.01993	0.03242	61.0	1881.316
LTE	3424.238	0.00224	0.01167	61.0	5226.059
LTE	3481.190	0.00424	0.03136	61.0	1945.040
LTE	3560.429	0.00286	0.02440	61.0	2500.369
5G NR	3653.286	0.00561	0.04784	61.0	1275.177

<b>LTE</b>	3751.714	0.01292	0.12313	61.0	495.416
<b>WiFi</b>	5560.667	0.00595	0.02537	61.0	2404.644
<b>WiFi</b>	5639.190	0.01312	0.02795	61.0	2182.080

<b>Total Exposure Quotients [calculated from Adjusted Levels]</b>			
<b>Quotient</b>	<b>Frequency Range</b>	<b>Calculated Quotient Value</b>	<b>Limit</b>
<b>Electrical Stimulation Effects (as per ICNIRP 2010)</b>	<b>1 Hz to 10 MHz</b>	n/a	1
<b>Thermal Effects etc. (as per ICNIRP 2020)</b>	<b>100 kHz and above</b>	0.022935	1

<b>Overall Conclusions of the Survey</b>	
<b>Frequency Selective Measurements:</b> (Individual emissions measured at specific frequencies)	<b>Below ICNIRP Public Exposure Limits (Compliant)</b>
<b>Total Exposure Quotient:</b> (Assessment of cumulative emissions from multiple transmitters)	<b>Below ICNIRP Public Exposure Limits (Compliant)</b>


## Adjusted Levels

For some emissions, an adjusted level may be required to be derived from the measured level:

- (1) **to compensate for the limited measurement resolution of the spectrum analyser.** For example, a measurement of a DVB-T (digital TV) signal performed with a resolution of 5 MHz needs to be adjusted upwards using a correction factor to account for the energy present within the full 7.61 MHz bandwidth of the signal; and/or
- (2) **to extrapolate to an estimate of the level under maximum traffic or duty cycle from the transmitter.** For example, the base stations of mobile phone networks produce emissions which vary according to the changing volume of calls or data traffic over the course of the day.

## ICNIRP Public Exposure Limits

These are set out in the ICNIRP Guidelines as reference levels for the practical assessment of exposure to electric and magnetic fields, as experienced by the general public (excluding occupational exposure and exposure during medical procedures). The limits vary according to the frequency of the emissions as illustrated in the adjacent diagram. For example, the limits for Wi-Fi in the 2400-2483.5 MHz frequency band are higher than those for FM Radio transmissions in the much lower 87.5-108 MHz frequency band.

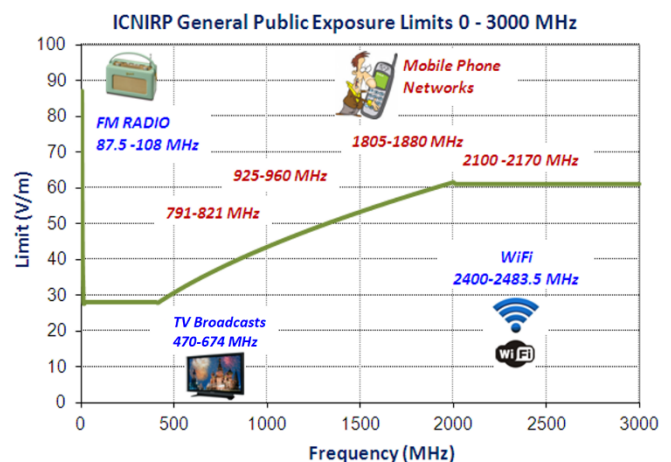

## Total Exposure Quotients

The Total Exposure Quotients (which must be  $\leq 1$ ) are calculated in accordance with mathematical formulas specified in the ICNIRP Guidelines to assess the cumulative effect of emissions from multiple transmitters. The quotients in this report are calculated from the Adjusted Levels rather than from the Measured Levels to account for total potential public exposure under maximum traffic conditions.

The two quotients are as follows:

### (1) Quotient for Electrical Stimulation Effects (1 Hz to 10 MHz)

This quotient is calculated only in a small number of cases where strong emissions in the frequency range between 1 Hz and 10 MHz are present at the survey location (e.g. near a long wave radio transmitter site). This essentially involves summing the ratios (measured field strength/applicable limit) for each emission.

### (2) Quotient for Thermal Effects etc. (100 kHz and above)

The measurements of any emissions above 100 kHz are used to calculate a quotient to assess any thermal (heat) and other effects as per ICNIRP 2020. This essentially involves summing the squares of the ratios (measured field strength/applicable limit) for each emission.

## 9. Frequency Selective Measurements - Detailed Results

Detailed results of the frequency selective measurements, including spectrum analyser scan graphs, are presented on the following pages. The results show the NIR levels by frequency in V/m and include the number of times they are below the ICNIRP Public Exposure Limits (which are frequency dependent).

In the cases of GSM and TETRA, the 'pilot' (or BCCH and MCCH respectively) frequency of each base station is shown. Alternatively for LTE and LTE+ the highest centre frequency is typically identified in place of the 'pilot' frequency. An adjusted level, if applicable, is also shown. Further details regarding the calculation of adjusted levels are contained in document 08/51R4.