

## 1. Survey Summary

<b>Address of Transmitter Site Surveyed:</b>	Clontarf Road, Dublin 3
<b>Site Type:</b>	GSM, UMTS
<b>Survey Date:</b>	22/09/2009

<b>Measurement Location:</b> (at point of maximum non-ionising radiation near site )	There are two sites within 75m of each other in the vicinity. The measurements were conducted close to a modern art sculpture and the cycle lane at the junction of the Alfie Byrne Road and the Clontarf Road. There was direct line of sight to both sites.
---	---

<b>Measurement Location Coordinates:</b>		deg	min	sec	
	<b>Latitude:</b>	N	53	21	45.8
	<b>Longitude:</b>	W	6	13	15.7

### Purpose and Conduct of Survey:

Non-ionising electromagnetic radiation levels were measured at the point of highest emissions which was determined near the site, in order to **assess compliance with** the international **ICNIRP Limits** for general public exposure to non-ionising radiation.

Compliance with the ICNIRP Limits is a **condition** of various wireless transmission **licences** issued by the **Commission for Communications Regulation (ComReg)**.

### Overall Conclusions of the Survey

<b>Frequency Selective Measurements:</b> (Individual emissions measured at specific frequencies)	<b>Below ICNIRP Public Limits (Compliant)</b>
<b>Total Exposure Quotient:</b> (Assessment of cumulative emissions from multiple transmitters)	<b>Below ICNIRP Public Limits (Compliant)</b>

## 2. Surveyors

### Survey conducted on behalf of ComReg by:



Vilicom Engineering Ltd, 14 Joyce Way, Park West Business Park, D12

<b>Survey Engineer(s):</b>	<b>Report Writer:</b>	<b>Report Reviewer:</b>
John Ryan, BSc	John Ryan, BSc	Sean Keating, BEng

### 3. Survey Location Details

#### Transmitter Site Photo



Garda mast



Shops


#### Survey Weather Conditions

**Sky:**  
Clear/Overcast

**Temperature:**  
18° C

**Relative Humidity:**  
60%

#### Map of Transmitter Site and Measurement Location

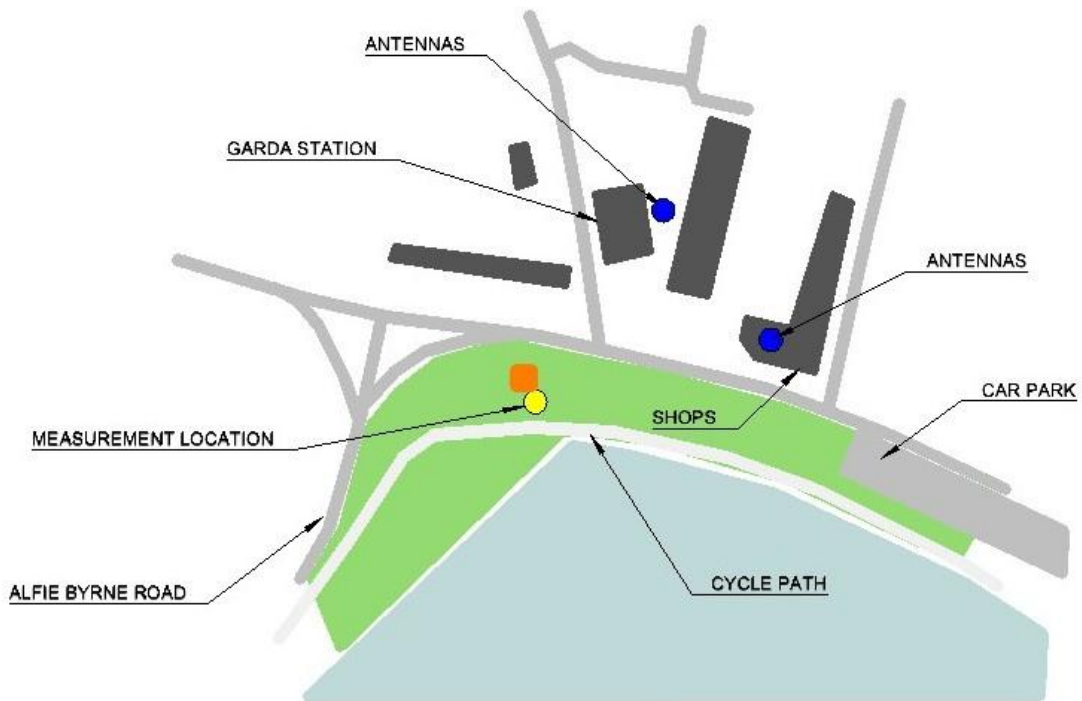

## 4. Introductory Note

### Purpose of Survey

The survey of the designated transmitter site was commissioned by the Commission for Communications Regulation (ComReg) as part of its Programme of Measurement of Non-Ionising Radiation Emissions. The purpose of the survey was to assess whether non-ionising electromagnetic radiation emissions from the site were compliant with the limits specified in the guidelines<sup>1</sup> published by the International Commission on Non-Ionizing Radiation Protection (ICNIRP). Compliance with the ICNIRP limits is a condition of various Wireless Telegraphy licences (e.g. GSM and UMTS Mobile telephony, wireless broadband, broadcasting etc.) issued by ComReg.

### Survey Methodology

Measurements of the non-ionising radiation emissions from the site were conducted in accordance with the methodology outlined in document ComReg 08/51R<sup>2</sup>, which incorporates many of the measurement methods and procedures outlined in ECC Recommendation (02)04<sup>3</sup>.

### Note re this Report Version

If you have downloaded this report from [www.siteviewer.ie](http://www.siteviewer.ie) or from [www.comreg.ie](http://www.comreg.ie), you are reading an abbreviated version. In addition to sections 1 to 8, the full extended technical version of this report contains a comprehensive technical record of the measurements and any calculations performed, a list of equipment used, as well as a technical appendix. A copy of the extended report is available on request from ComReg.

---

<sup>1</sup> “Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)”, International Commission on Non-Ionizing Radiation Protection, Published in ‘Health Physics’, April 1998, Volume 74, Number 4. [www.icnirp.de](http://www.icnirp.de)

<sup>2</sup> <http://www.comreg.ie/fileupload/publications/ComReg0851R.pdf>

<sup>3</sup> ECC REC (02)04 (revised Bratislava 2003, Helsinki 2007), “Measuring Non-Ionising Electromagnetic Radiation (9 kHz – 300 GHz), published by the European Communications Committee on [www.ero.dk](http://www.ero.dk).

## 5. Survey Overview

### Survey Stages

In accordance with the methodology outlined in document ComReg 08/51R, the survey was conducted in three stages as follows:

- 1 Initial Site Survey
- 2 Full Survey – Broadband Measurements
- 3 Full Survey – Frequency Selective Measurements

Brief outlines of each stage, along with results and conclusions of the measurements are presented in the three sections which follow.

### Measurement of Electromagnetic Fields

Electromagnetic fields can be sub-divided into two components:

- (1) Electric field **E** [measured in Volts per metre or V/m]
- (2) Magnetic field **H** [measured in Amperes per metre or A/m]

The E-field and the H-field are mathematically interdependent<sup>4</sup> in the **far-field** which is the region<sup>5</sup> where the distance from the radiating antenna exceeds the wavelength of the radiated electromagnetic field. The measurement locations for most transmitter installations lie well within the far-field, as the wavelengths of the transmitted signals are relatively short and the antennas are typically located many metres from any public area. The following table shows wavelengths for commonly transmitted signals:

Transmitter Type	Frequency	Wavelength
PMR Low Band VHF	68 MHz	4.41 m
UHF TV	470 MHz	0.64 m
GSM 900 (mobile phone base)	925 MHz	0.32 m
GSM 1800 (mobile phone base)	1805 MHz	0.17 m
UMTS (mobile phone base)	2110 MHz	0.14 m

In the far-field only one component needs to be measured, as the other component can be easily derived from it. Normally it is only the electric field which is measured in this region.

In the case of transmitters of very long wavelength signals, such as long wave radio (1.19 km wavelength), the H-field and E-field must be measured separately as the point of measurement will most likely lie within the **reactive near-field** region. This is the region located less than one wavelength from the radiating antenna. Here, the relationship between E and H becomes very complex and there is no direct correlation between both components of the electromagnetic field.


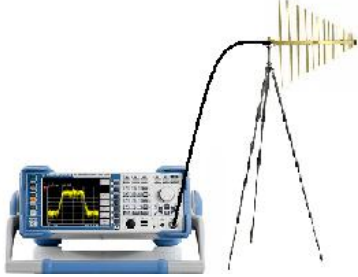

<sup>4</sup>  $E = H \times Z_0$  where  $Z_0$  (characteristic impedance of free space)  $\approx 377 \Omega$

<sup>5</sup> Beyond a distance of  $\lambda + 2D^2/\lambda$  where  $\lambda$  is the wavelength and D is the antenna's largest dimension

## Measurement Equipment

The measurement of electromagnetic fields is a complex process which involves the use of various meters, spectrum analysers, probes and antennas, which are appropriate to the frequencies of the emissions being measured.

The table below shows examples of equipment typically used to measure electromagnetic fields in non-ionising radiation surveys.

Initial Site Survey and Broadband Measurements	Frequency Selective Measurements	
 <p>Used to measure the overall electric or magnetic field present over a range of frequencies. (e.g. 100kHz to 3GHz)</p>	<p><b>SPECTRUM ANALYSER WITH TRIPOD MOUNTED ANTENNA</b></p>  <p>Spectrum analysers are used to measure individual emissions at specific frequencies. The individual emissions contribute to the overall electromagnetic field. Examples of individual emissions are a TV signal and a mobile phone signal for a particular mobile operator. There may be a number of emissions from different transmitters contributing to the overall electromagnetic field at a particular location.</p>	<p><b>PORTABLE SPECTRUM ANALYSER WITH ANTENNA DIRECTLY CONNECTED</b></p> 

## 6. Initial Site Survey

An initial survey was carried out in the area around the designated transmitter site in order to determine the point of maximum non-ionising radiation (NIR). This is the location at which the overall electrical field strength level measured was somewhat higher than that measured in all other areas around the site and represents the highest level of exposure to which a member of the general public might be subjected in the vicinity of the transmitter.

For this initial survey a calibrated **field strength meter** fitted with an **18 GHz isotropic probe** was used. The meter and probe were used to measure the sum of all electrical fields present at **all frequencies from 3 MHz up to 18 GHz**.

Once the point of maximum NIR was determined, broadband and frequency selective measurements were conducted at that location (see following two sections).

For the duration of those measurements, the various instruments, antennas and probes used were mounted on non-metallic supports.


## 7. Full Survey – Broadband Measurements

The purpose of these measurements was to get an overview of the intensity of the electromagnetic field present at the point of maximum NIR near the site. There, the field strength meter and probe combination were mounted on a tripod and were set to record, over a six minute period, simultaneous measurements of the sum of all received signals within the frequency range of the probe.

The broadband measurement results presented in the graph and table below show the levels in Volts per metre (V/m) recorded in the course of the six minute measurement. The average and maximum levels can be compared to the lowest maximum ICNIRP general public guideline limit which is 28 V/m.

If a broadband measurement is higher than 28 V/m, it does not necessarily follow that the ICNIRP Limits have been exceeded, as the limits are frequency dependent. For example, if the emissions are in the 2100 MHz UMTS mobile phone frequency band, then the limit which applies is higher at 61 V/m. A more detailed investigation involving frequency selective measurement is necessary to assess compliance with the ICNIRP Limits (see next section).

**Electric field strengths recorded over 6 min period using 18 GHz probe at point of max NIR:**

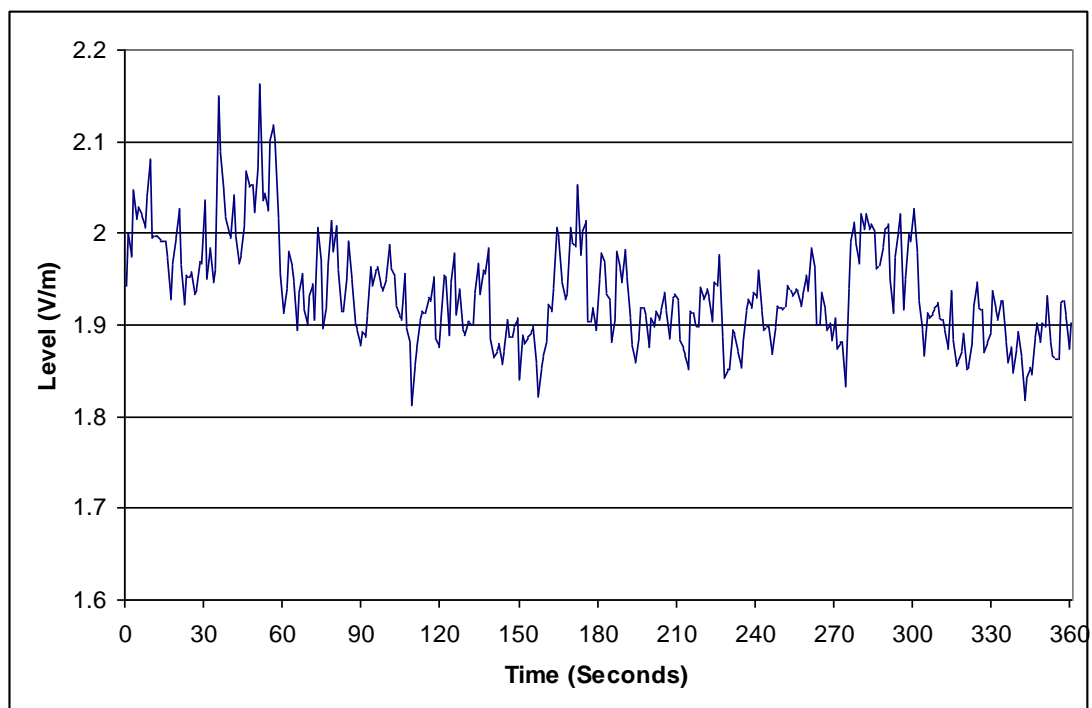

Acquisition Mode: 1 Sec. Sampling

<b>Mean Measurement:</b>	1.93V/m	<b>Peak Measurement:</b>	2.16V/m
<b>Date:</b>	22/09/2009	<b>Start Time:</b>	15:24
<b>Meter:</b>	Narda NBM 550	<b>Probe:</b>	EF 1891 (3 MHz - 18 GHz)

### Conclusion of the Broadband Measurements

The mean and peak measurements were below the lowest ICNIRP guideline limit of 28 V/m.

## 8. Full Survey – Frequency Selective Measurements

### Basic Measurement Procedure

A more detailed survey was performed at the point of maximum NIR near the site in order to identify the individual transmit frequencies and field strengths of each type of emission (e.g. mobile telephone GSM and UMTS, wireless broadband, TV, radio signals etc) and their contribution to the total electromagnetic field. The measurements were performed using spectrum analyser equipment and a range of antennas to match the frequency bands in which emissions were measured.

### Table of Measurement Results

A list of the measurements made is presented in the table on the next page. For each emission measured, the table shows:

- **Emission Type** (e.g. GSM or UMTS mobile phone, TV etc)
- Transmission **frequency** of the signal
- **Measured Level** (in Volts per metre, V/m)
- **Adjusted Level** if applicable (to account for the characteristics of certain signal types or to compensate for limitations of measurement equipment or to estimate emissions for max call or data traffic)
- **ICNIRP Limit** for Public Exposure

For further details of Adjusted Levels and ICNIRP Limits, please see the explanatory notes which follow the table of measurement results.

### Assessment of ICNIRP Compliance of Individual Emissions

The levels for each emission measured, which have been adjusted where necessary, are compared to the relevant ICNIRP general public guideline limit which applies at the particular frequency of the emission. It should be noted that the ICNIRP guideline limits vary according to frequency. The limits for the different measurements presented in the tables will vary as the measurements have been performed at different frequencies.

### Assessment of ICNIRP Compliance of Cumulative Emissions

The levels measured for individual emissions are used to calculate two **Total Exposure Quotients** in order to assess the cumulative effect of emissions from multiple transmitters. For further details of the quotients, please see the explanatory notes which follow the tables of measurement results.

The calculated values of the quotients must be  $\leq 1$  in order for the aggregate of NIR emissions to satisfy the criteria of the ICNIRP Guidelines.

**Table of Frequency Selective Measurement Results**

<b>Emission Type</b>	<b>Frequency</b>	<b>Measured Level (V/m)</b>	<b>Adjusted Level (V/m)</b>	<b>ICNIRP Limit (V/m)</b>	<b>Times below Limit [adjusted Values]</b>
PMR	74.528	0.004451	0.004451	28.0	6290
FM Radio	102.192	0.011066	0.011066	28.0	2530
FM Radio	88.457	0.010162	0.010162	28.0	2755
PMR	156.159	0.002323	0.002323	28.0	12055
TV PAL	183.280	0.069502	0.088077	28.0	318
TV PAL	207.600	0.061873	0.078409	28.0	357
T-DAB	227.093	0.022803	0.026946	28.0	1039
T-DAB	224.187	0.022413	0.026485	28.0	1057
TETRA	390.933	0.036898	0.063909	28.0	438
TETRA	391.333	0.026730	0.046298	28.0	605
TETRA	391.733	0.013198	0.022859	28.0	1225
TETRA	393.117	0.008730	0.015120	28.0	1852
PMR	456.410	0.003958	0.003958	29.4	7421
PMR	456.521	0.002143	0.002143	29.4	13710
PMR	459.425	0.001272	0.001272	29.5	23169
PMR	466.722	0.000931	0.000931	29.7	31903
TV PAL	567.347	0.111045	0.140723	32.8	233
TV PAL	535.333	0.100462	0.127311	31.8	250
TV PAL	583.680	0.088410	0.112038	33.2	297
TV PAL	799.933	0.259717	0.329128	38.9	118
TV PAL	775.760	0.171002	0.216703	38.3	177
TV PAL	743.747	0.136773	0.173326	37.5	216
TV DVB-T	741.133	0.059841	0.157397	37.4	238
TV DVB-T	790.787	0.048362	0.127203	38.7	304
GSM	955.683	0.721107	1.442215	42.5	29
GSM	946.000	0.373250	0.746500	42.3	57
GSM	946.817	0.085212	0.170424	42.3	248
GSM	953.933	0.086298	0.172596	42.5	246
GSM	1855.750	0.591562	1.183123	59.2	50
GSM	1844.750	0.297852	0.595703	59.1	99
GSM	1867.500	0.136301	0.272603	59.4	218
GSM	1837.750	0.128973	0.257947	58.9	229
GSM	1865.250	0.103276	0.206552	59.4	288
GSM	1863.000	0.093648	0.187297	59.3	317
UMTS FDD	2133.600	0.522396	3.378202	61.0	18
UMTS FDD	2128.000	0.496021	3.207640	61.0	19
UMTS FDD	2113.300	0.408790	2.643539	61.0	23
UMTS FDD	2116.333	0.396735	2.565580	61.0	24

Table continued overleaf....

### Table of Frequency Selective Measurement Results

Emission Type	Frequency	Measured Level (V/m)	Adjusted Level (V/m)	ICNIRP Limit (V/m)	Times below Limit [adjusted Values]
UMTS FDD	2147.600	0.114025	0.737370	61.0	83
UMTS FDD	2166.733	0.075509	0.488299	61.0	125
FWALA	3558.000	0.004592	0.011584	61.0	5266
FWALA	3564.333	0.001122	0.006207	61.0	9828
FWALA	3572.333	0.001122	0.004445	61.0	13724
FWALA	3530.000	0.001122	0.003584	61.0	17021

### Total Exposure Quotients [calculated from Adjusted Levels]

Quotient	Frequency Range	Calculated Quotient Value	Limit
Electrical Stimulation Effects	1 Hz to 10 MHz	n/a	1
Thermal Effects	100 kHz and above	0.011976	1

### Conclusions of Frequency Selective Measurements

<b>Frequency Selective Measurements:</b> (Individual emissions measured at specific frequencies)	<b>Below ICNIRP Public Limits (Compliant)</b>
<b>Total Exposure Quotient:</b> (Assessment of cumulative emissions from multiple transmitters)	<b>Below ICNIRP Public Limits (Compliant)</b>

## Explanatory Notes

### Adjusted Levels<sup>6</sup>


For some emissions an adjusted level has been calculated from the measured level for any or all of the following reasons:

- to compensate for the limited measurement resolution of the spectrum analyser. For example, a measurement of a digital television signal performed with at a resolution of 5 MHz needs to be adjusted upwards using a correction factor in order to account for the energy present within the full 7.6 MHz bandwidth of the signal.
- to extrapolate to an estimate of the level under maximum traffic from the transmitter. For example, the base stations of mobile telephone networks produce emissions which vary according to the changing volume of calls or data traffic over the course of the day.
- to account for the characteristics of certain complex signal types (e.g. analogue PAL TV).

### The ICNIRP Public Exposure Limit

The ICNIRP Limits vary according to the frequency of the emissions, as illustrated here.

It can be seen that the limits applicable to GSM 900 mobile phone transmissions are higher than those applicable to UHF TV transmissions.

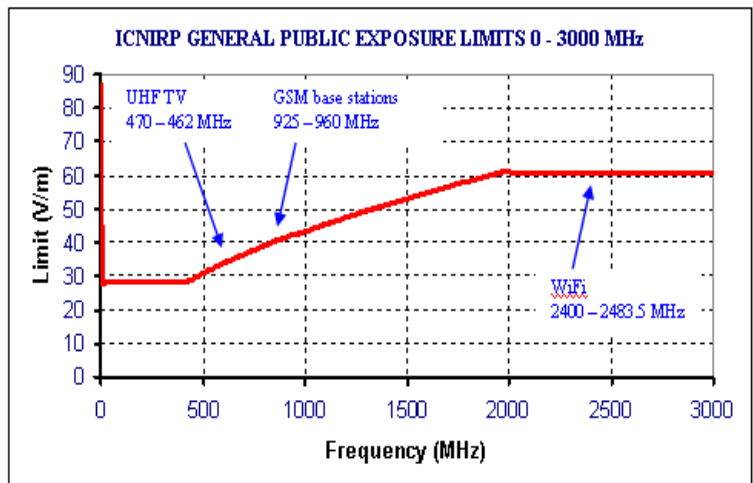

### Total Exposure Quotients

The Total Exposure Quotients (which must be  $\leq 1$ ) are calculated, in accordance with mathematical formulas specified in the ICNIRP Guidelines, in order to assess the cumulative effect of emissions from multiple transmitters. The quotients in this report are calculated from the Adjusted Levels rather than from the Measured Levels, in order to account for total potential public exposure under maximum traffic conditions. The two quotients are as follows:

#### Quotient for Electrical Stimulation Effects (1 Hz to 10 MHz)

This quotient is calculated only in a small number of cases where strong emissions in the frequency range between 1 Hz and 10 MHz are present at the survey location (e.g. near a long wave radio transmitter site).

#### Quotient for Thermal Effects (100 kHz and above)

The measurements of any emissions above 100 kHz are used to calculate a Quotient to assess any thermal (heat) effects.

<sup>6</sup> See appendices to the extended technical version of this report for further details re calculation of adjusted levels.